

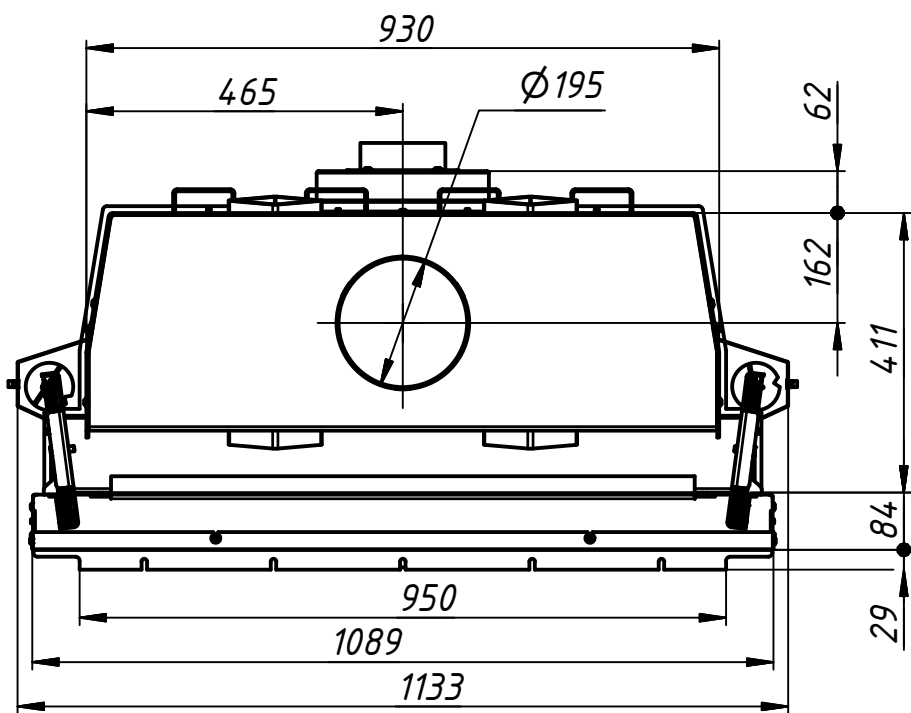
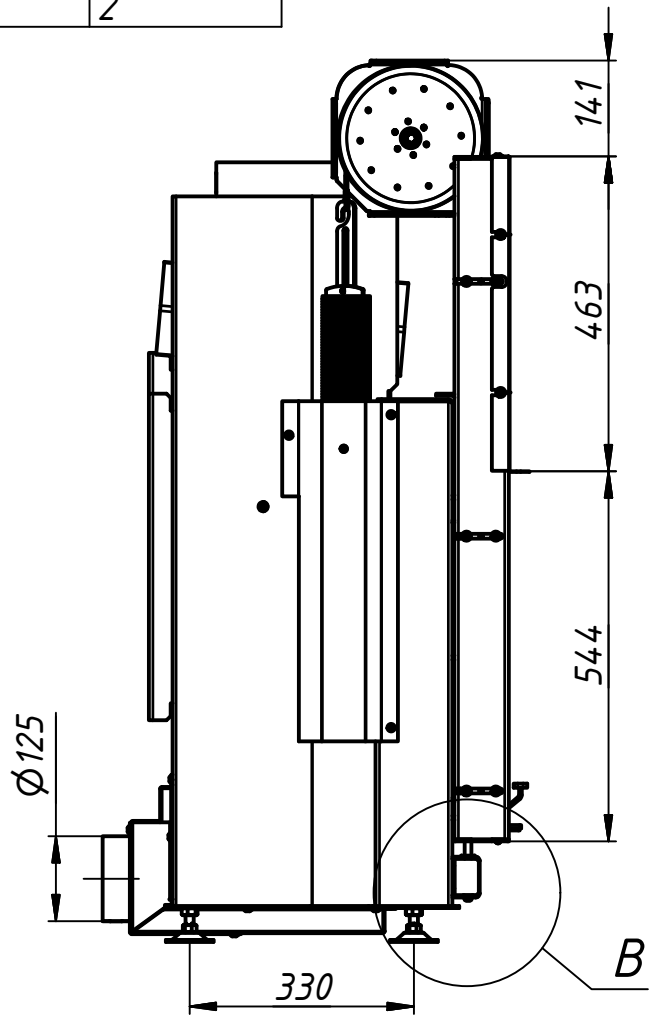


95x52 H

Technical information	Unit	Value
Tested according to	-	-
Rated heat power	kW	14.0
Fire wood volume	kg/h	4.4
Efficiency	%	>80
Heat distribution		
Glass pane (single / double)	%	30 / 20
Insert / fireplace surface	%	70 / 80
Boiler	%	--/ --
Required chimney pressure	Pa	11
Chimney diameter	mm	200
Combustion air connection diameter	mm	125
Minimal distances of the fireplace to cladding, insulation layer	mm	60
Cross-section of gratings		
Convection air	sq cm	1950
Supply air	sq cm	2350
Recommended log length	cm	30-40
Fireplace weight with 40mm chamotte plates	kg	275
Fireplace weight with 30mm chamotte plates	kg	265
Quantity of accumulation blocks	pcs	2


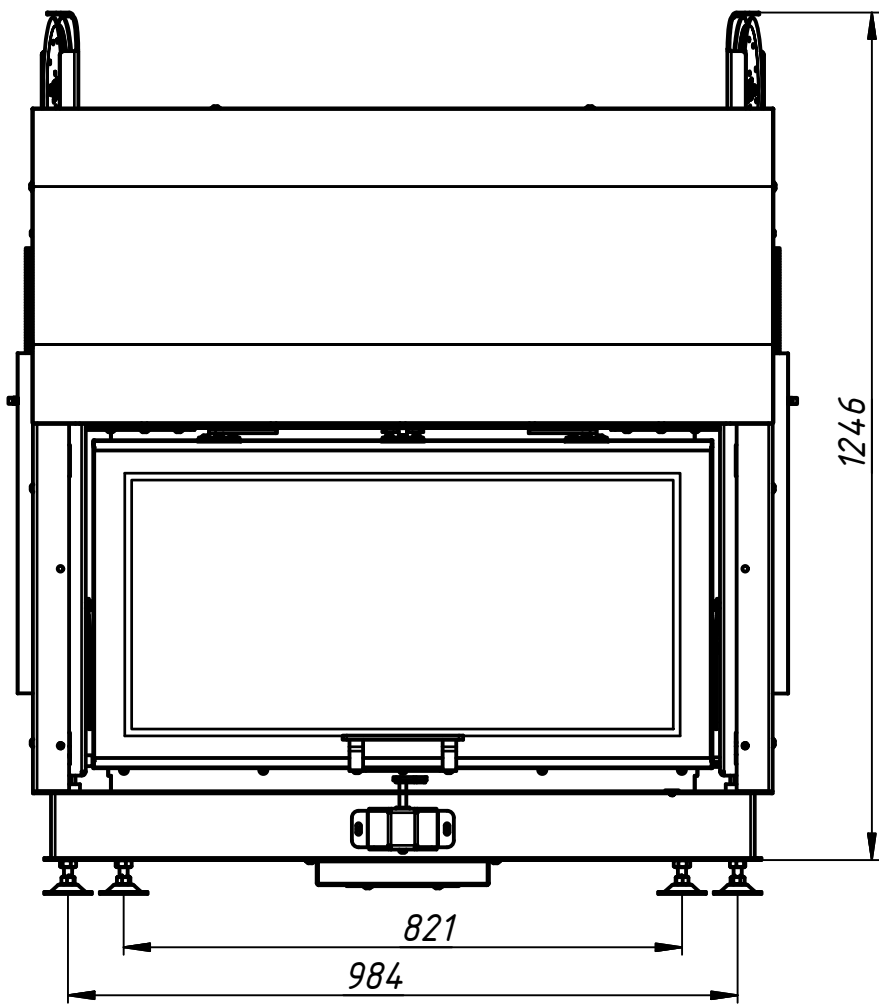


B (1:4)


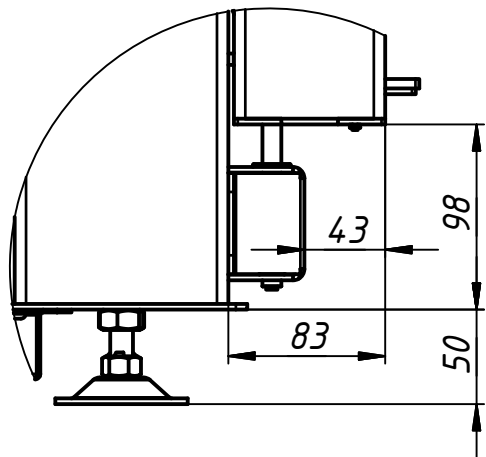


95x52 H

Mounting frame 3mm

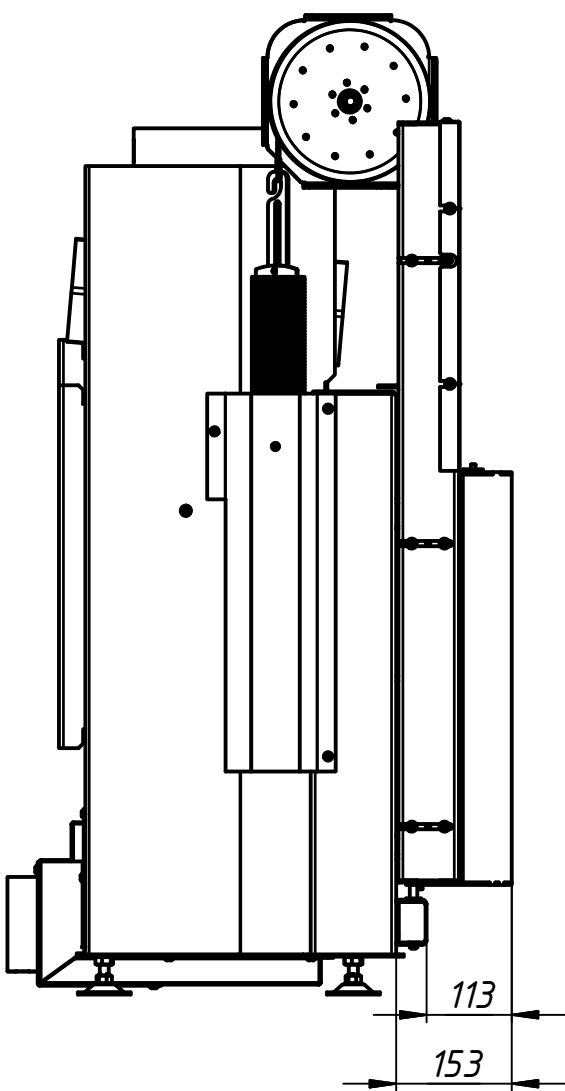
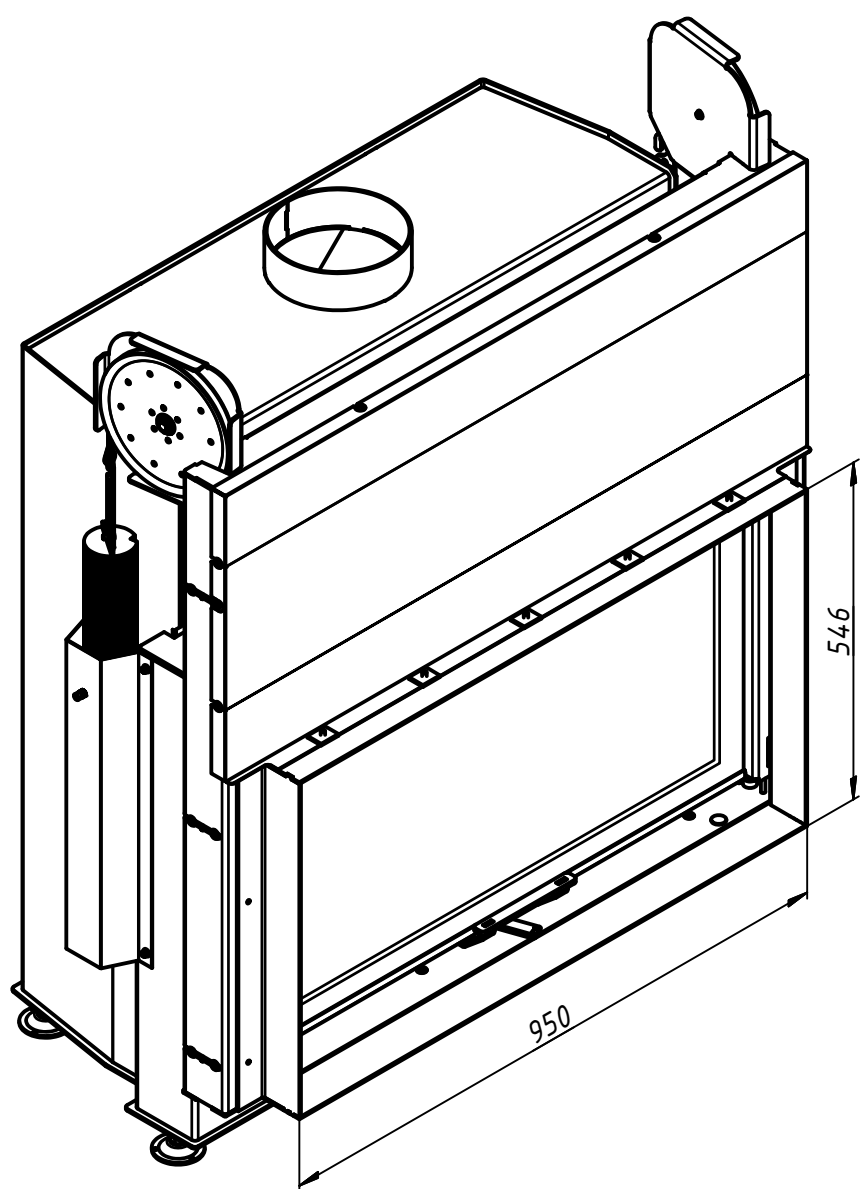


Mounting frame 1x90 (1.5mm)

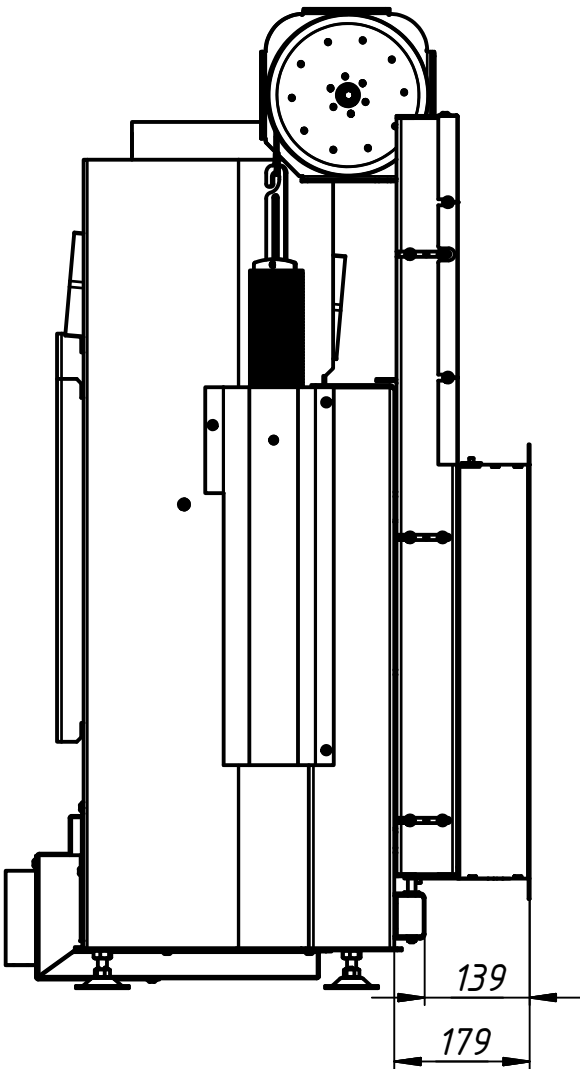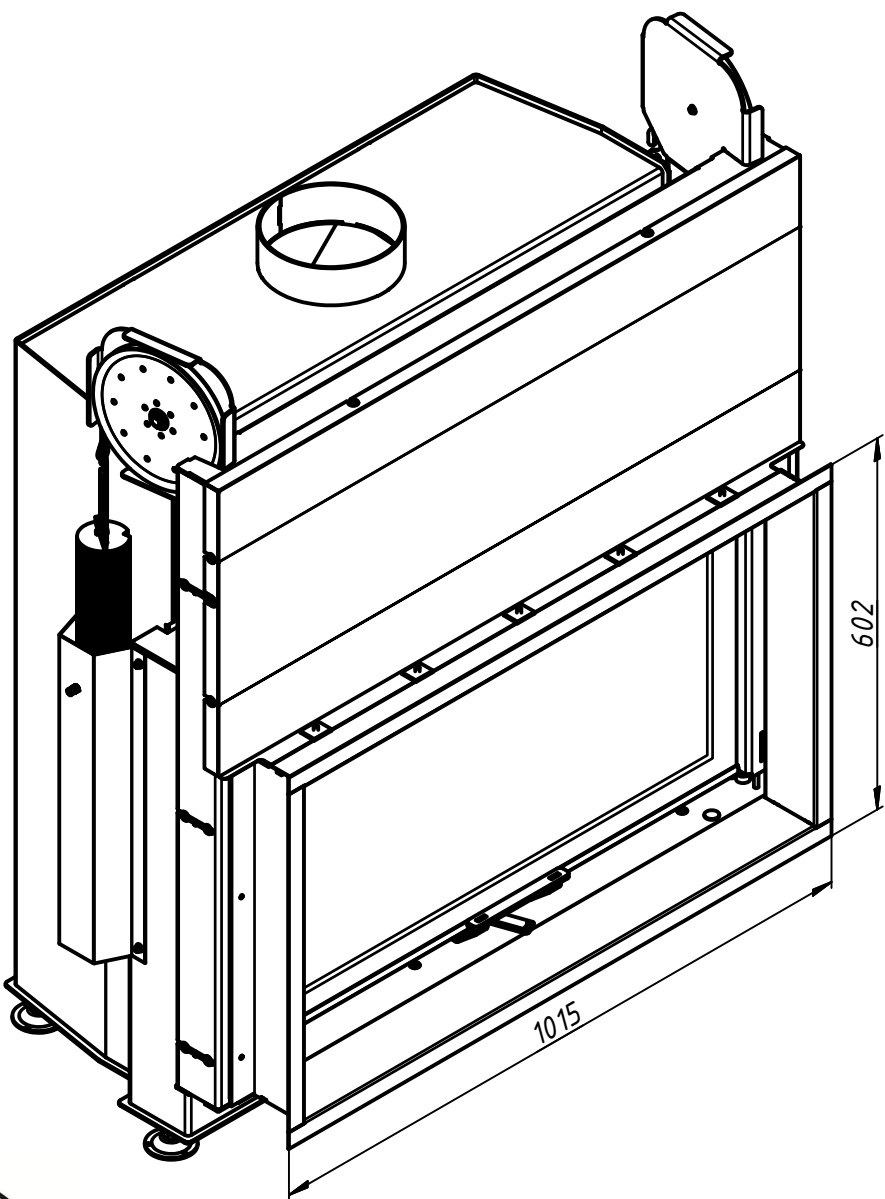


95x52 H


Accumulation blocks

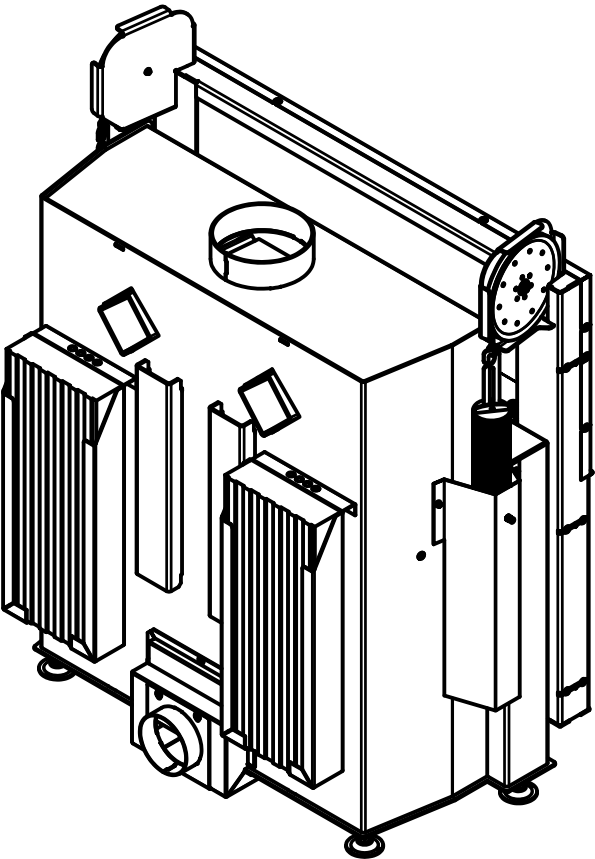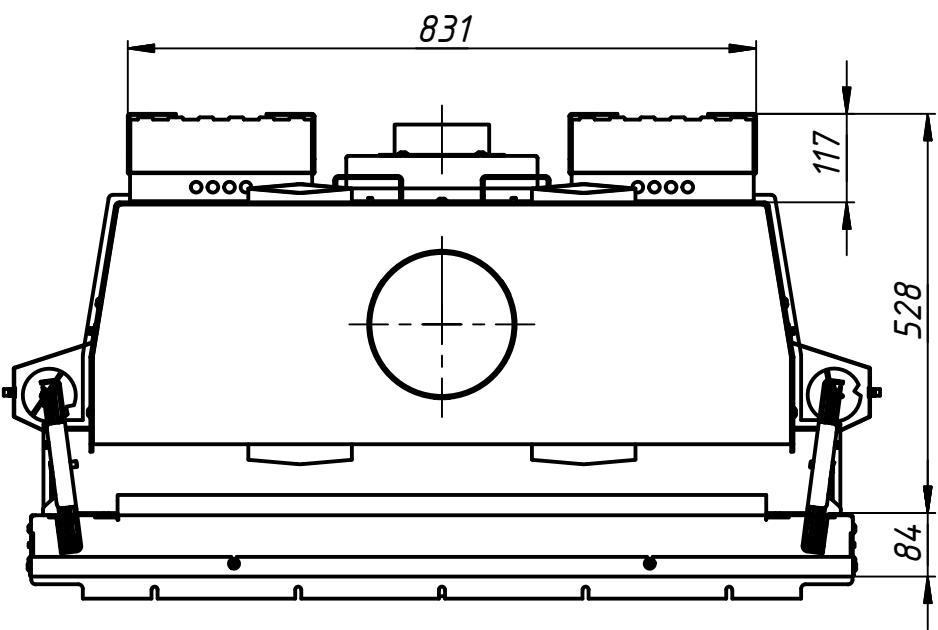

Legs position
(bottom view)

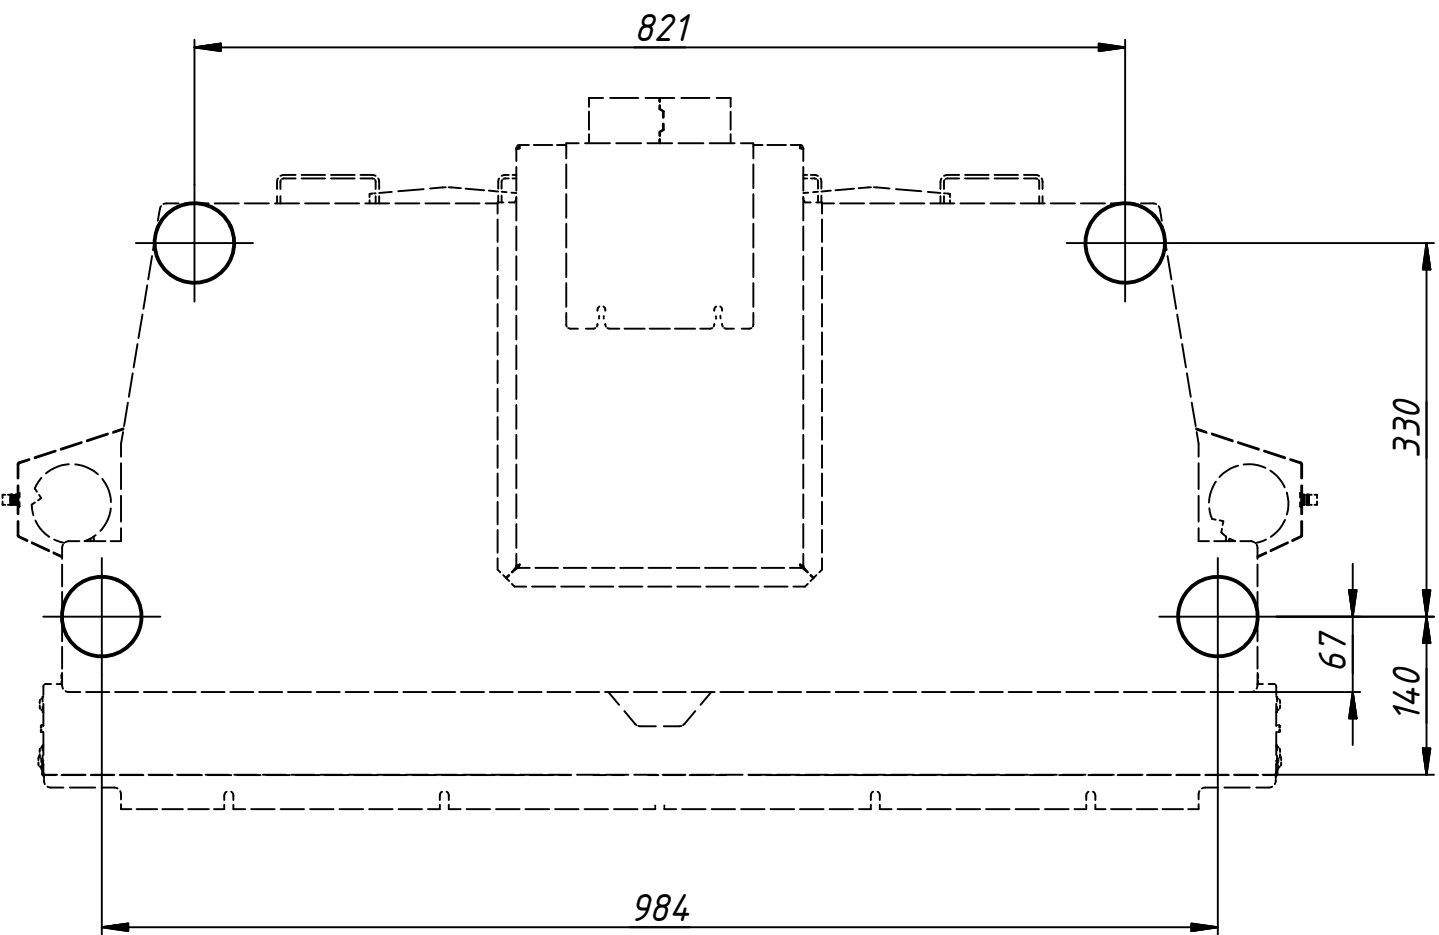

The default leg

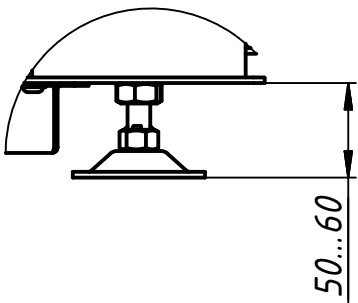

The longer leg

