

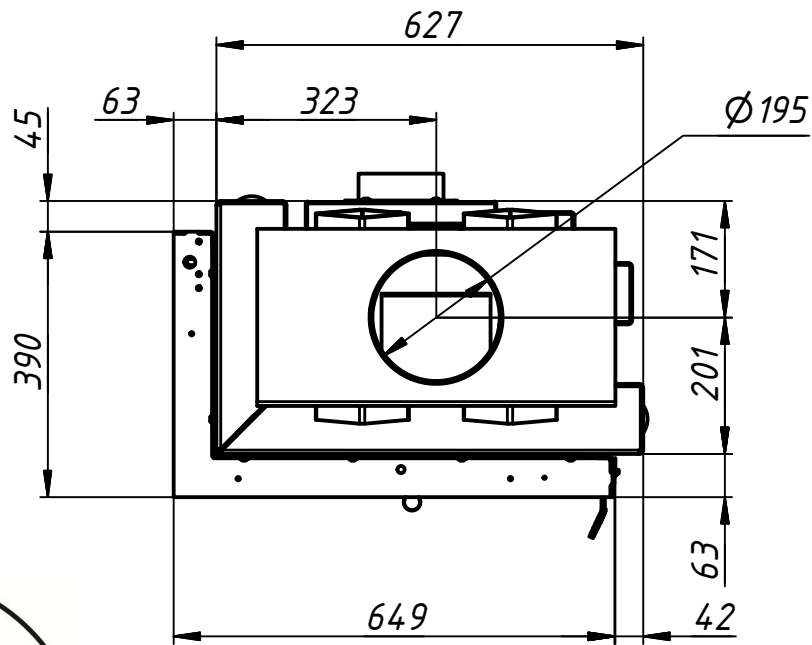


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	13.0
Wood consumption	kg/h	4.1
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	45 / --
fireplace insert	%	55 / --
water circuit	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection	mm	125
Minimum radiant area	sq m	3.3
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1400
Minimum outgoing air grating cross-section	sq cm	1700
Log length	cm	30
Weight fireplace with ribbed 40mm chamotte	kg	201
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		3
Increase in size with acumulation set from the side / behind	mm	65 / 65

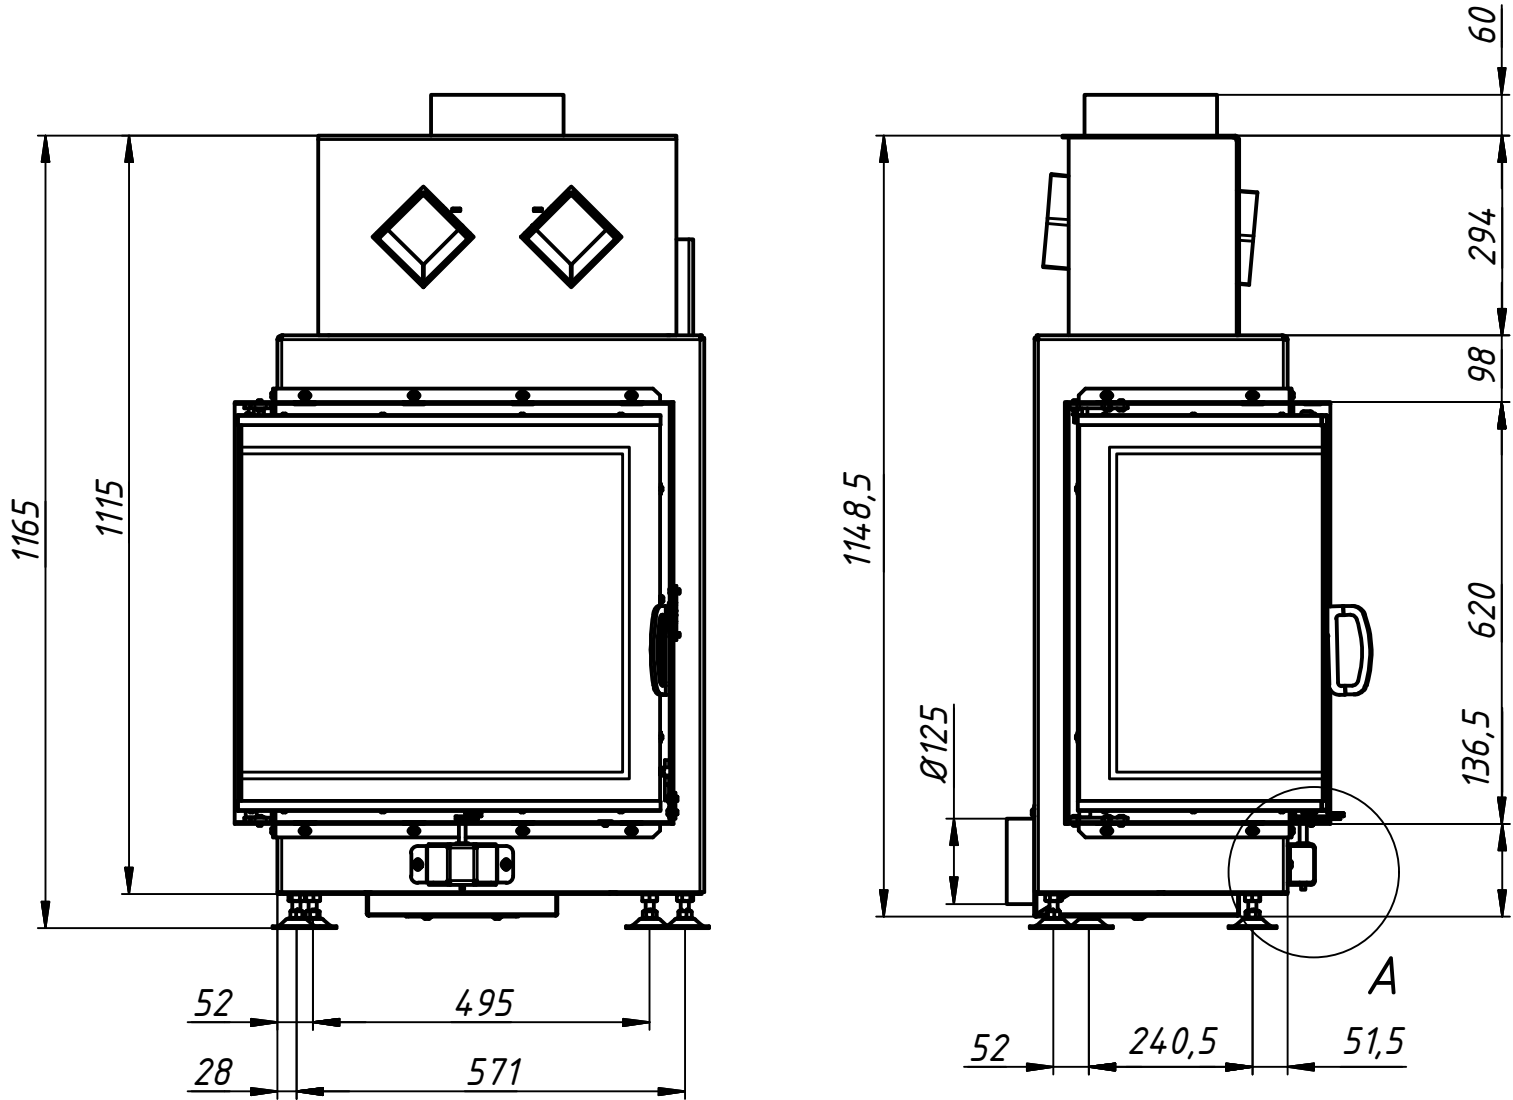

A (1:4)

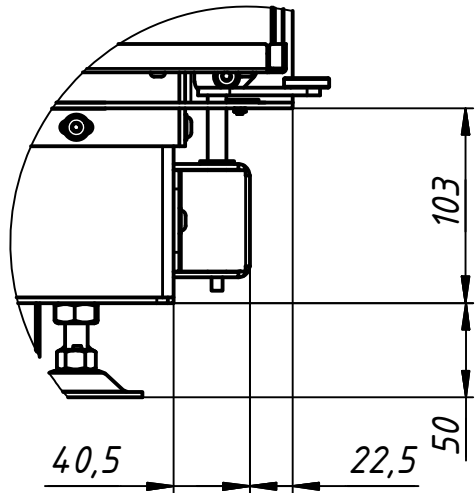

Изм.	Лист	№ докум.	Подп.	Дата

64x39x62 L

Лист