

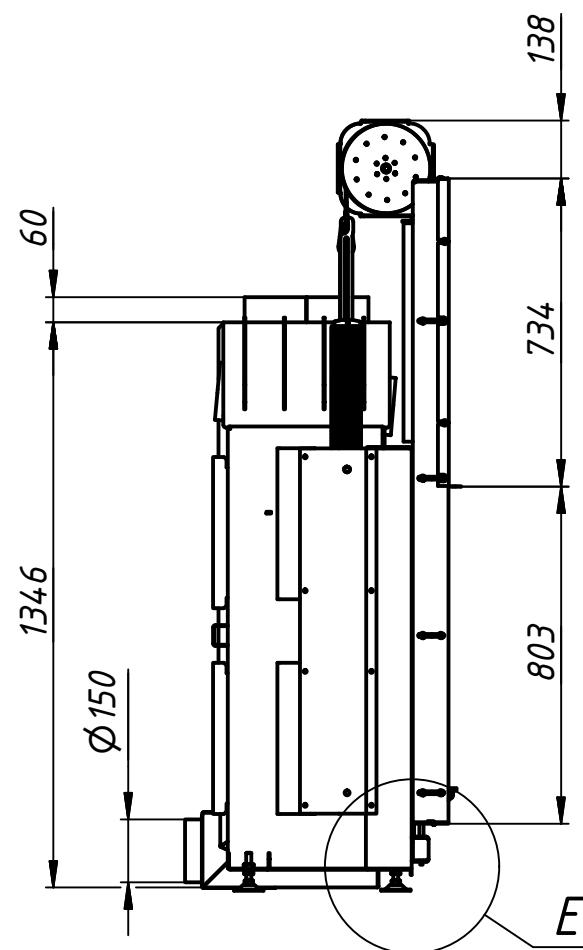
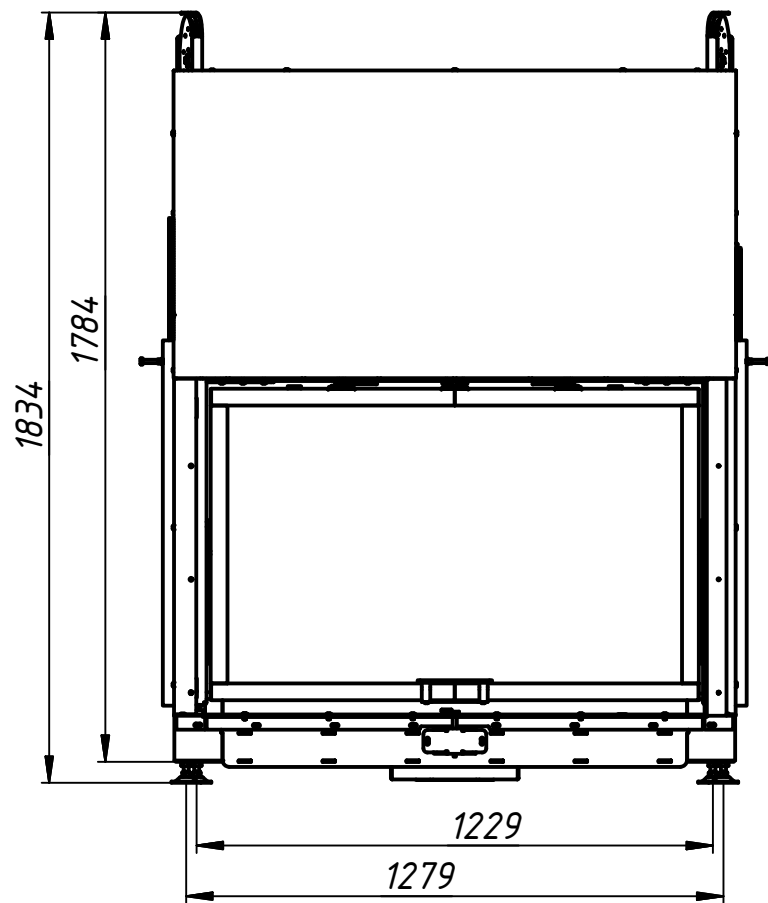


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	20
Wood consumption	kg/h	6.0
Efficiency	%	80
Heat distribution		
door glass (single / double)	%	40 / --
fireplace insert	%	60 / --
water circuit	%	-- / --
Required chimney pressure	Pa	13
Chimney diameter	mm	300
Combustion air connection	mm	150
Minimum radiant area	sq m	8.4
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	2400
Minimum outgoing air grating cross-section	sq cm	2850
Log length	cm	30-50
Weight fireplace with ribbed 40mm chamotte	kg	684
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		4
Increase in size with accumulation set from the side / behind	mm	-- / 82

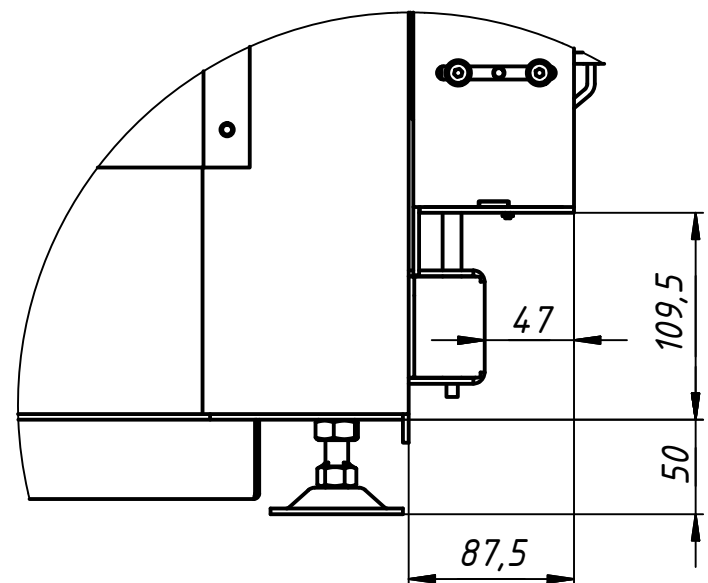



E (1:4)

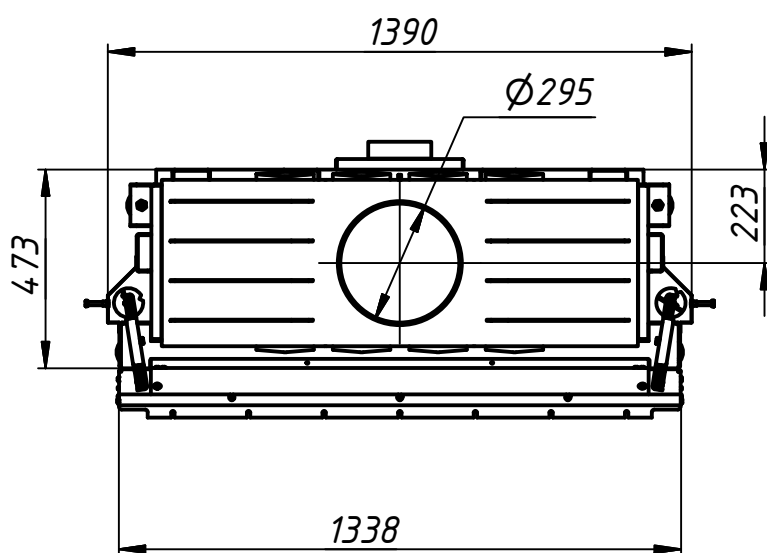


Изм.	Лист	№ докум.	Подп.	Дата

Decoration Frame 3mm

B

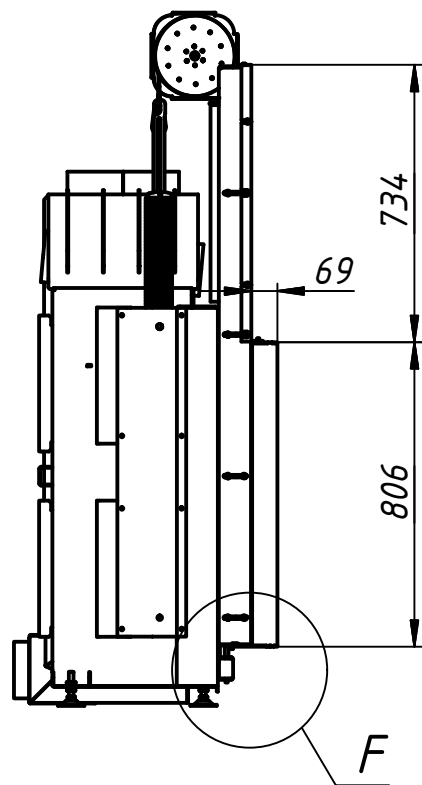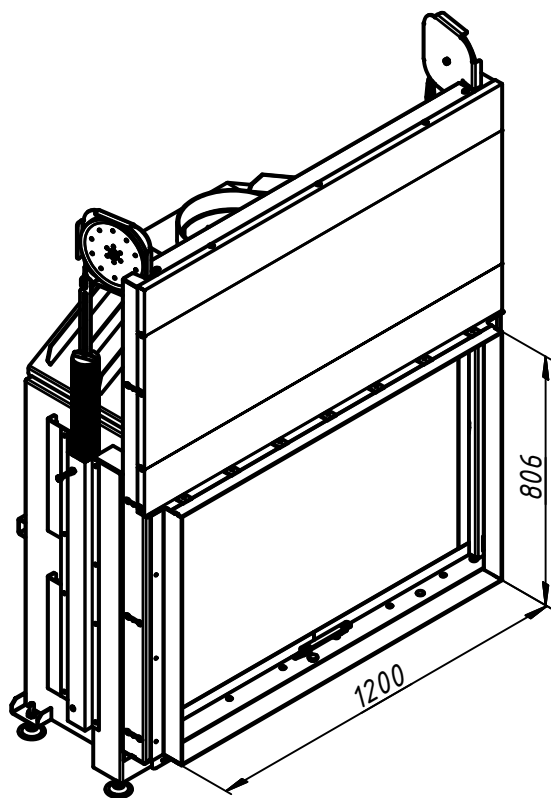



F (1:4)

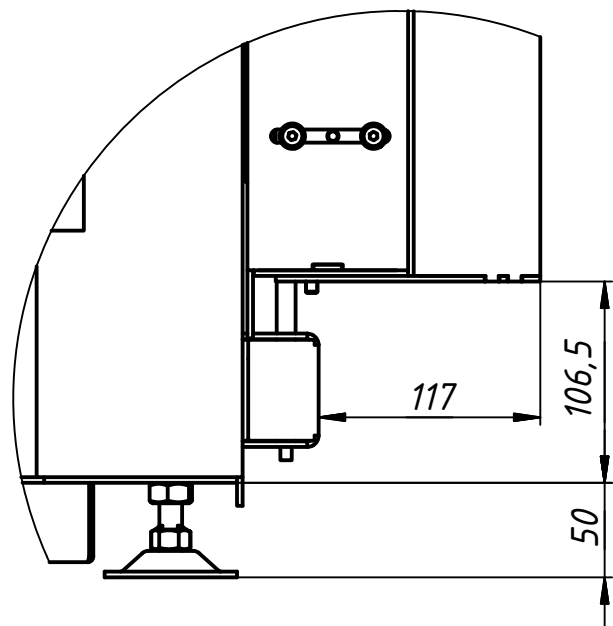


B

Decoration Frame 1,5mm (1x90)

A

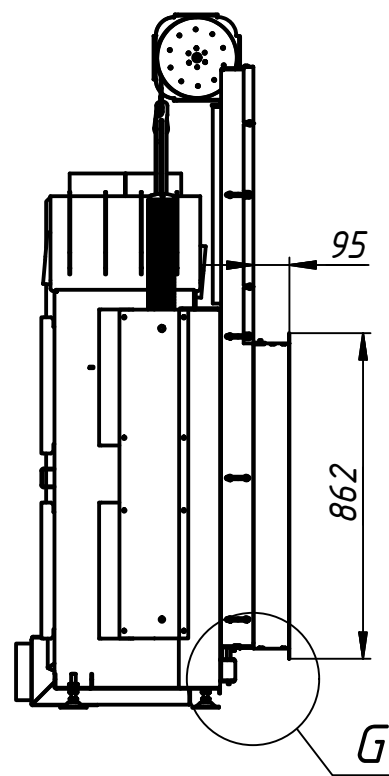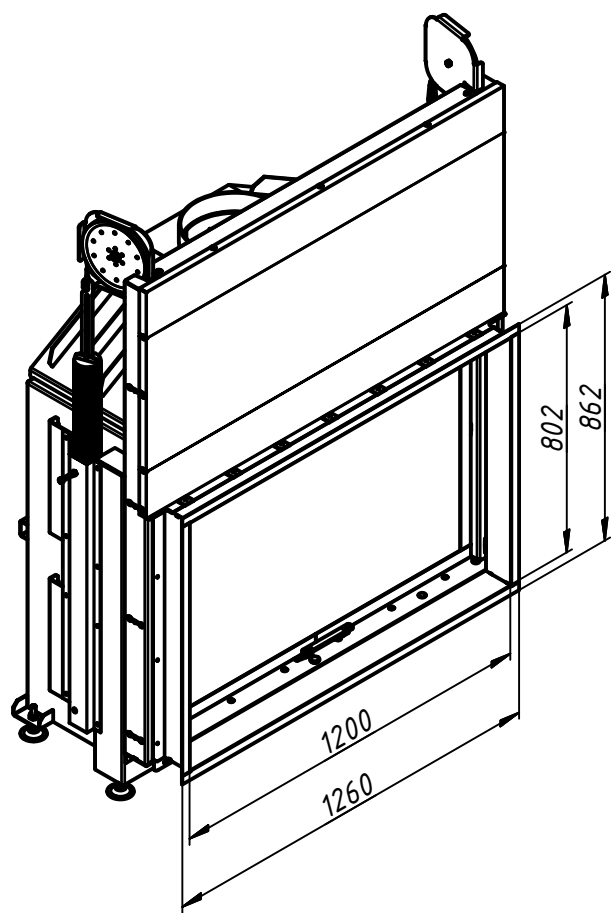

G (1:4)

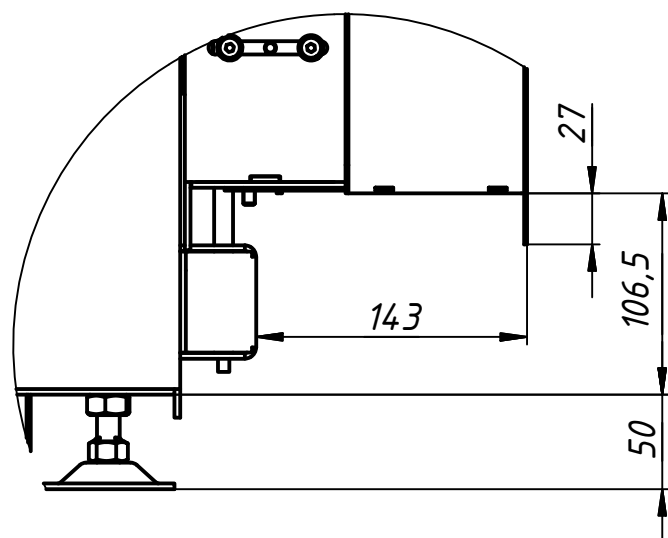

A