
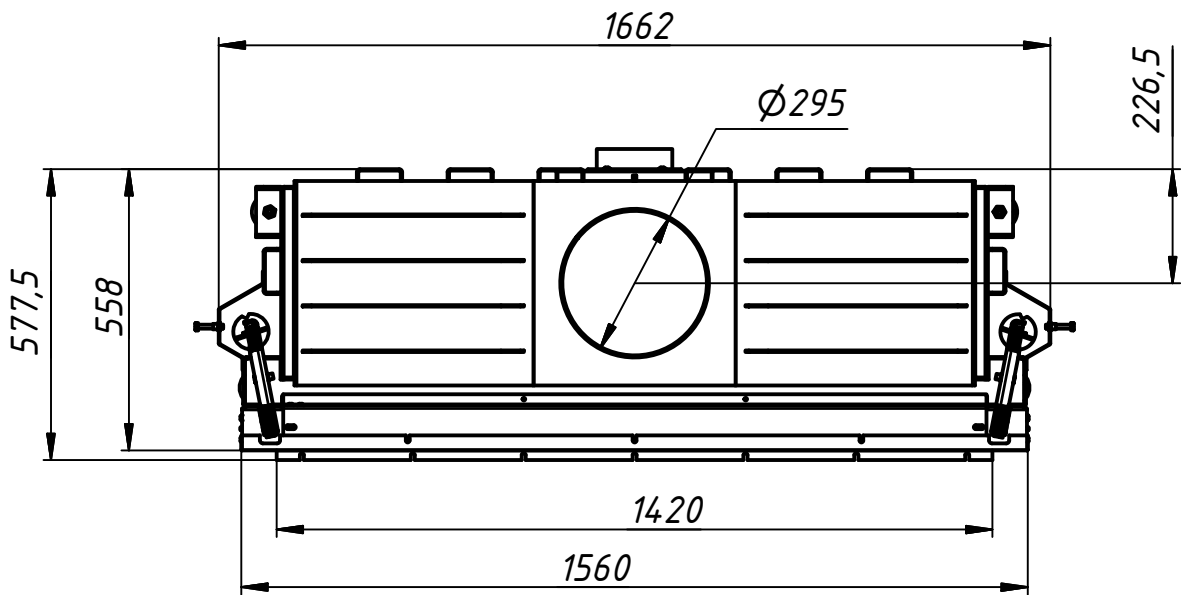
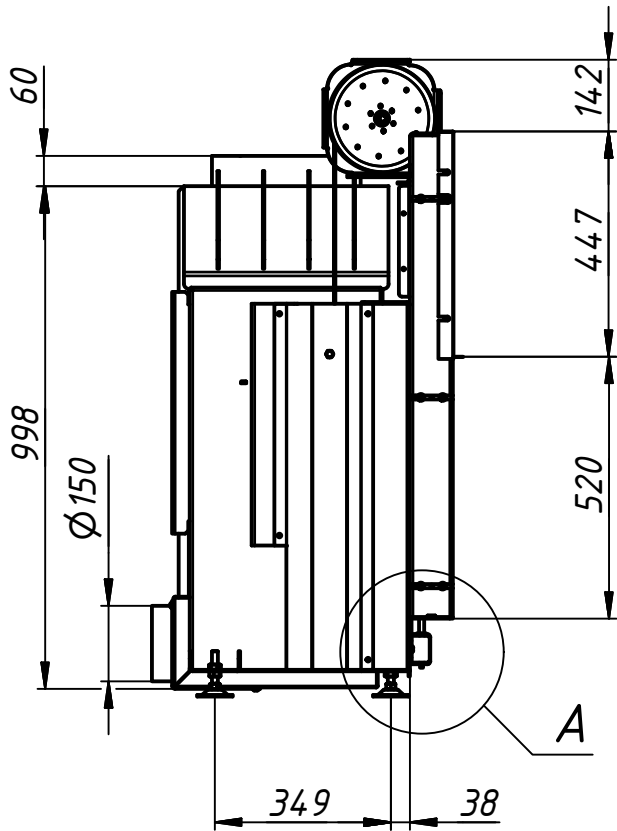



Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	19
Wood consumption	kg/h	5.7
Efficiency	%	80
Heat distribution		
door glass (single / double)	%	35 / --
fireplace insert	%	65 / --
water circuit	%	-- / --
Required chimney pressure	Pa	13
Chimney diametr	mm	300
Combustion air connection	mm	150
Minimum radiant area	sq m	9.6
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	2450
Minimum outgoing air grating cross-section	sq cm	2950
Log length	cm	30-50
Weight fireplace with ribbed 40mm chamotte	kg	411
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		4
Increase in size with acumulation set from the side / behind	mm	-- / 82

B

A

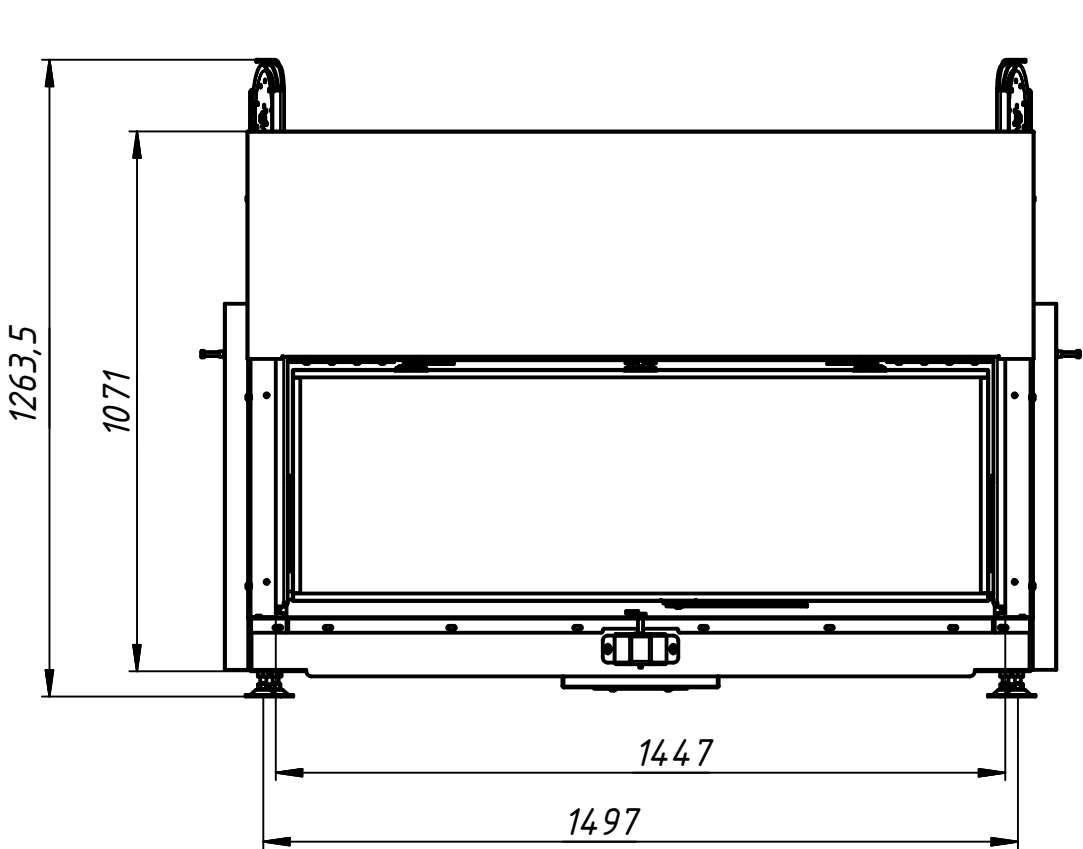

A (1:5)

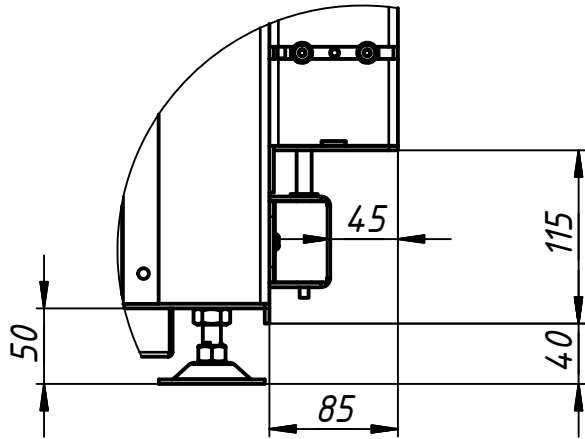



Изм.	Лист	№ докум.	Подп.	Дата

142x52 H


Лист
1

Decoration Frame 3mm

B

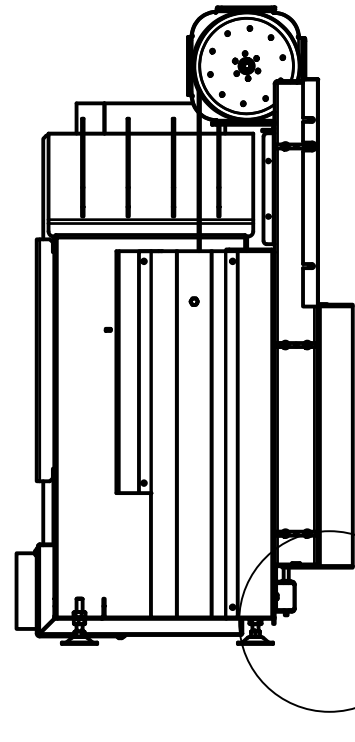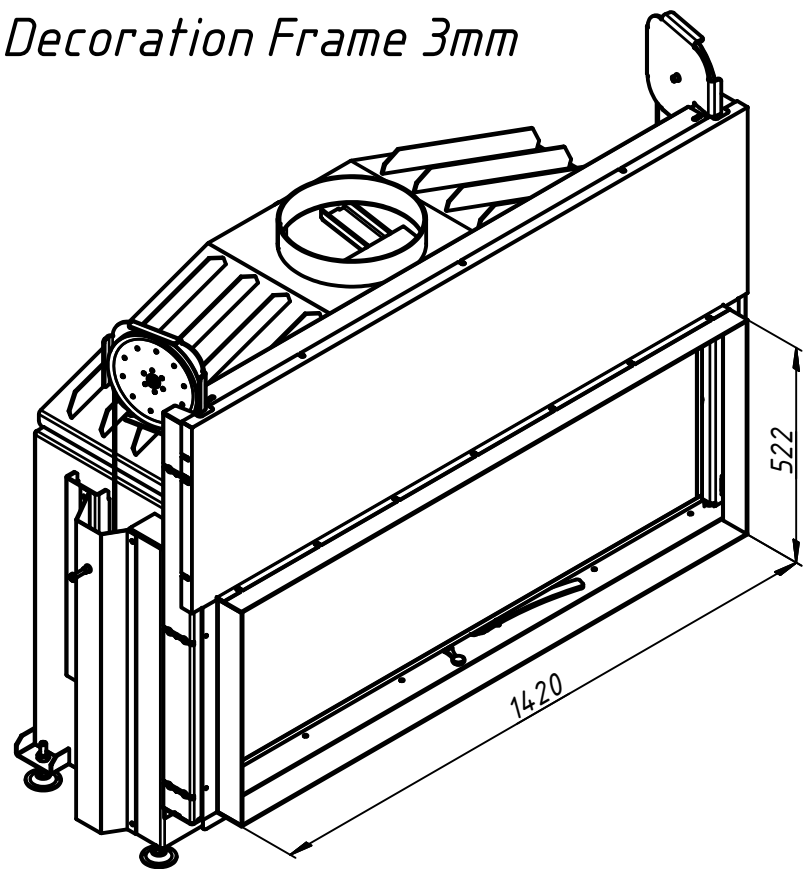



C (1:4)

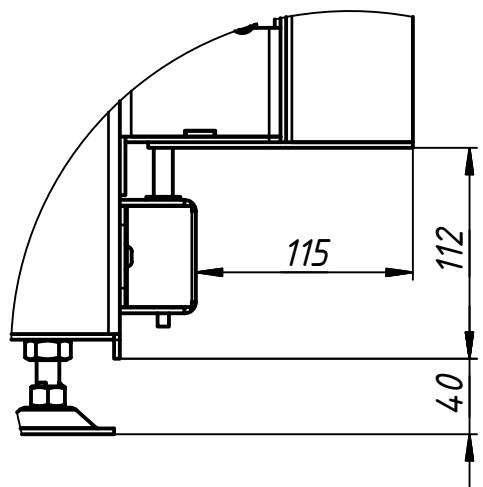


B

Decoration Frame 1,5mm (1x90)

A

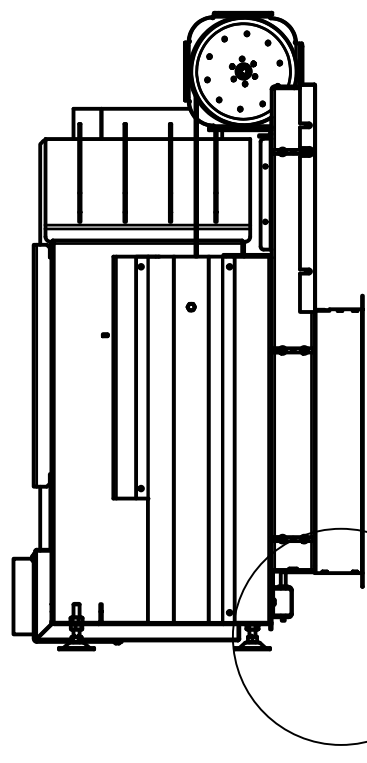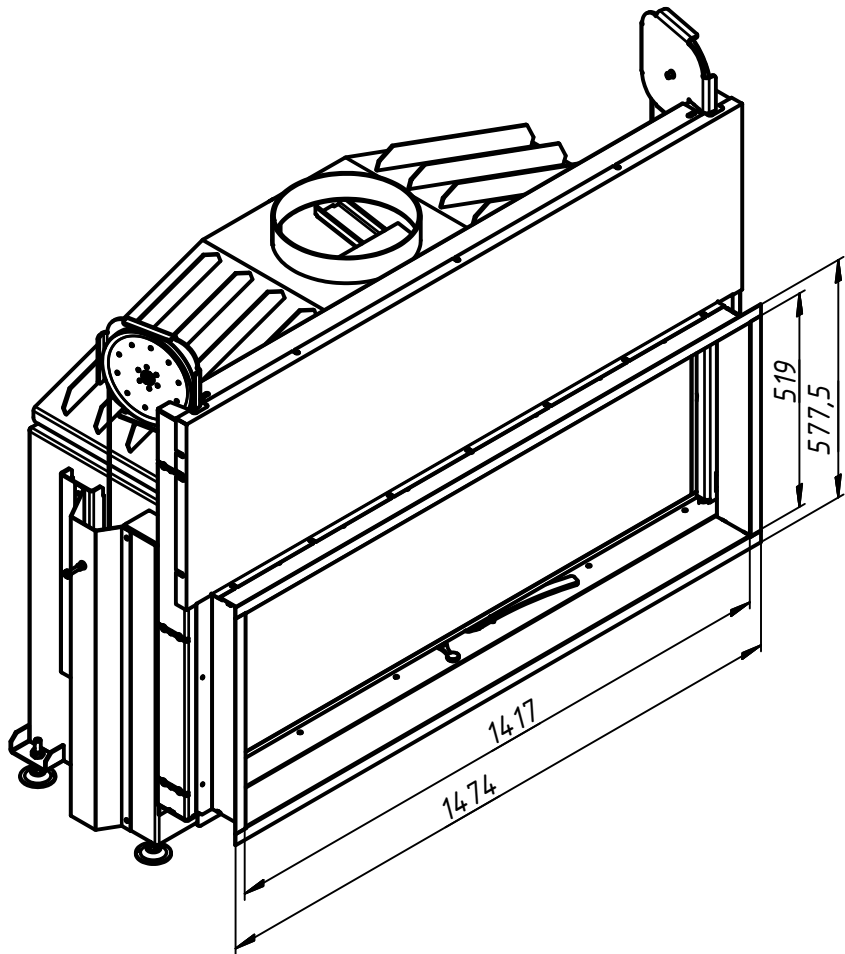

D (1:4)

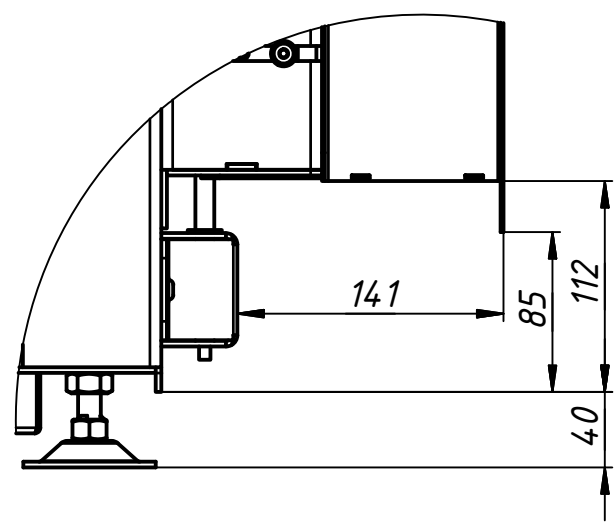

A

Изм.	Лист	№ докум.	Подп.	Дата