

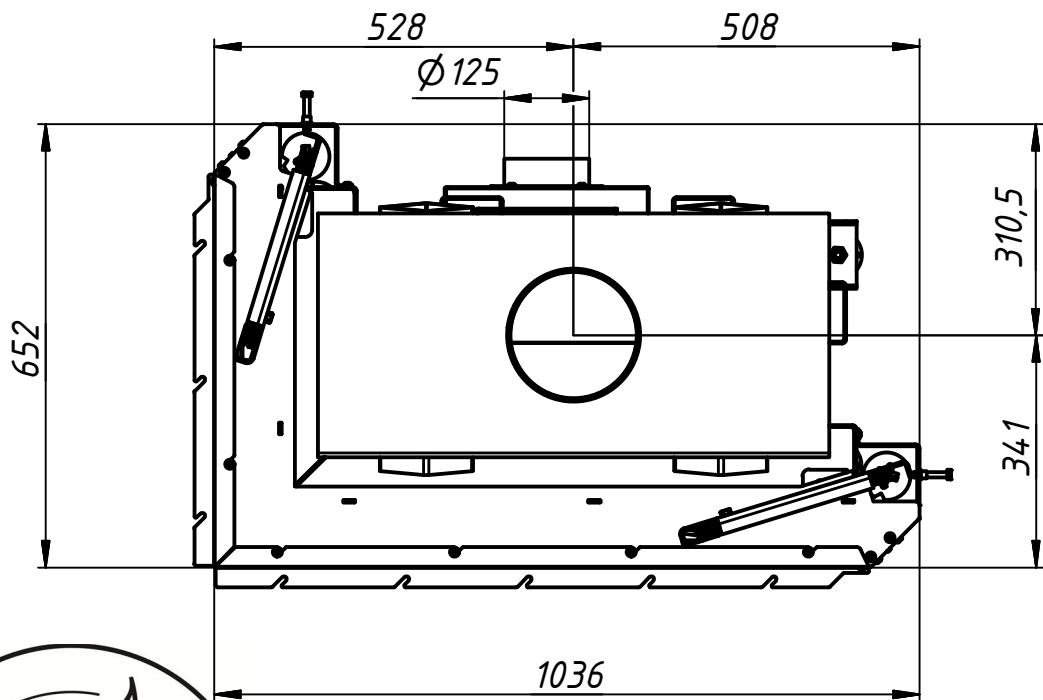
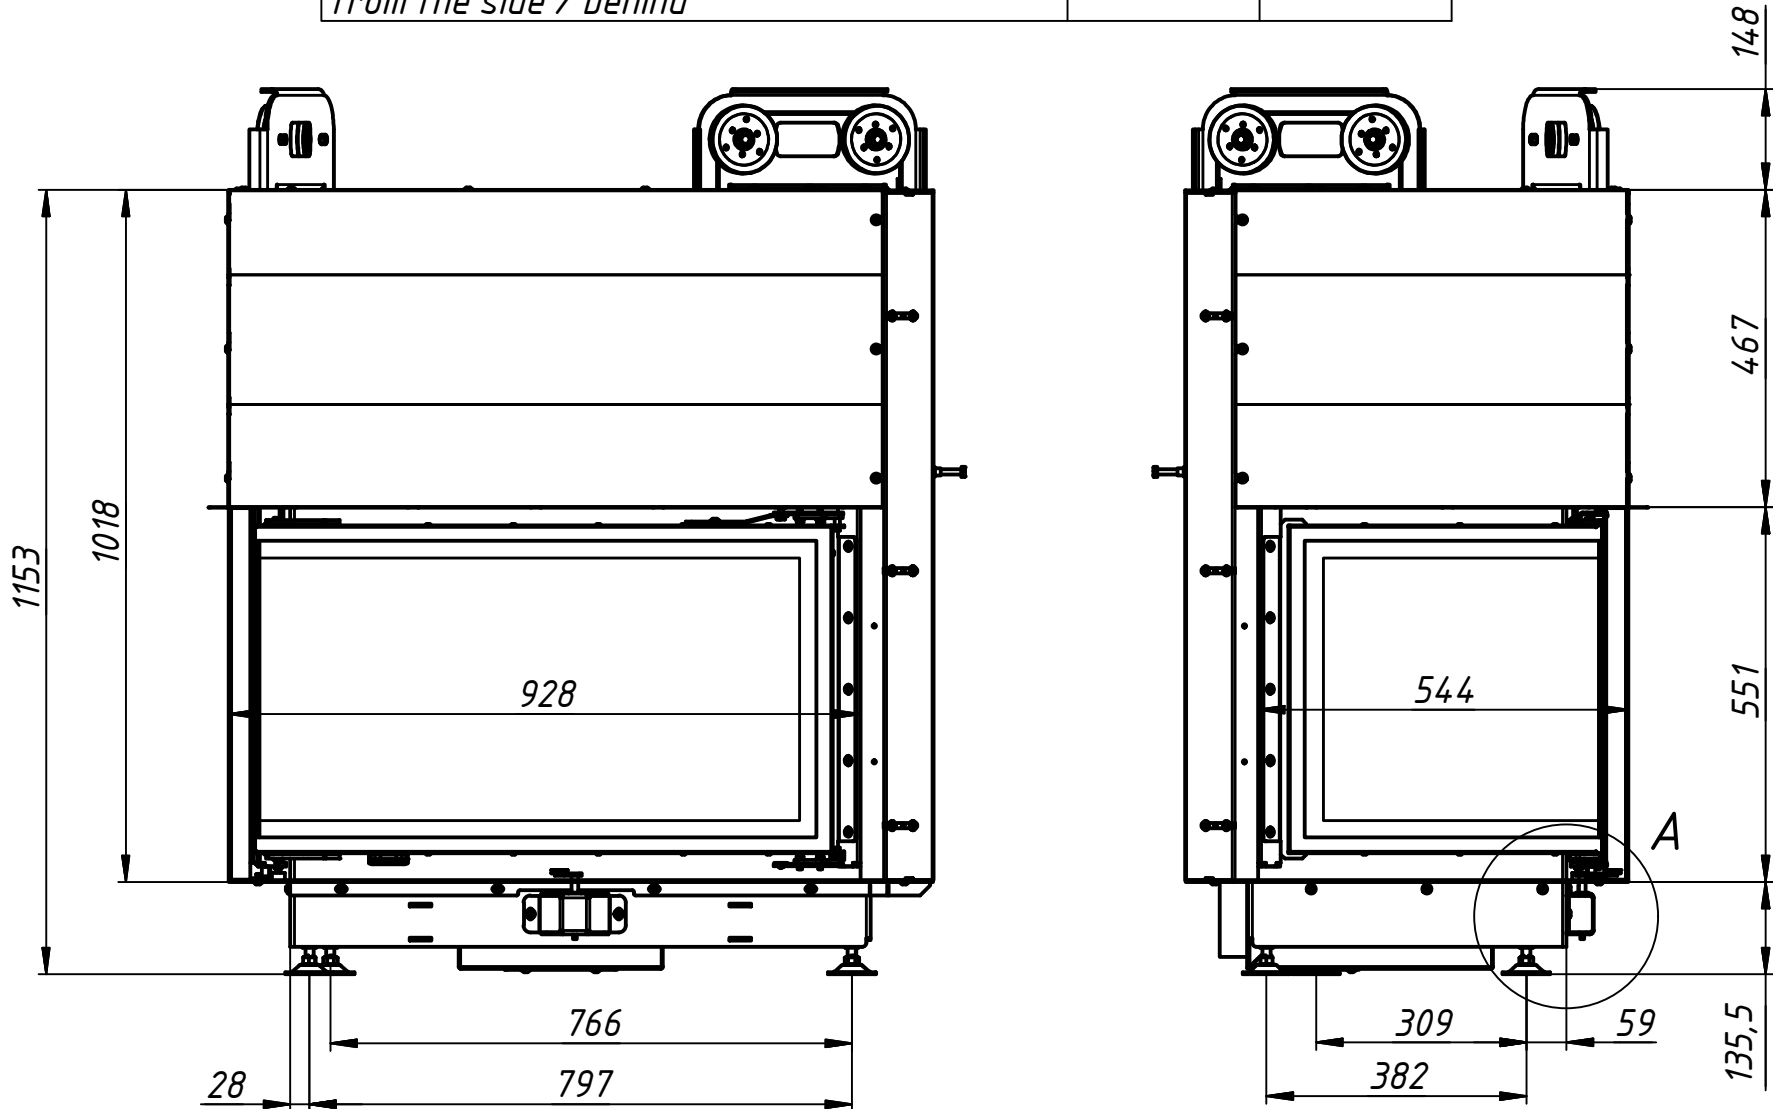


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	17.2
Wood consumption	kg/h	5.2
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	45 / --
fireplace insert	%	55 / --
water circuit	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection	mm	125
Minimum radiant area	sq m	5.8
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1900
Minimum outgoing air grating cross-section	sq cm	2250
Log length	cm	30-50
Weight fireplace with ribbed 40mm chamotte	kg	340
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		3
Increase in size with acumulation set from the side / behind	mm	67 / 67



A (1:5)

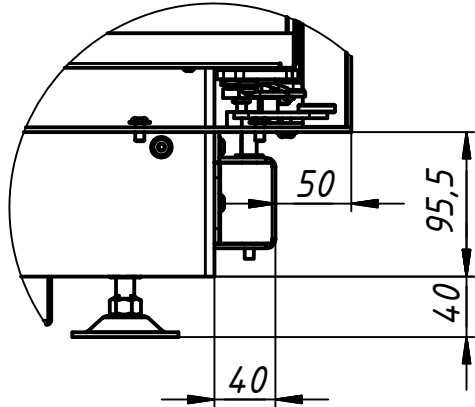



Removable handle included





Изм.	Лист	№ докум.	Подп.	Дата

90x51x54 HL

Mounting frame 3mm

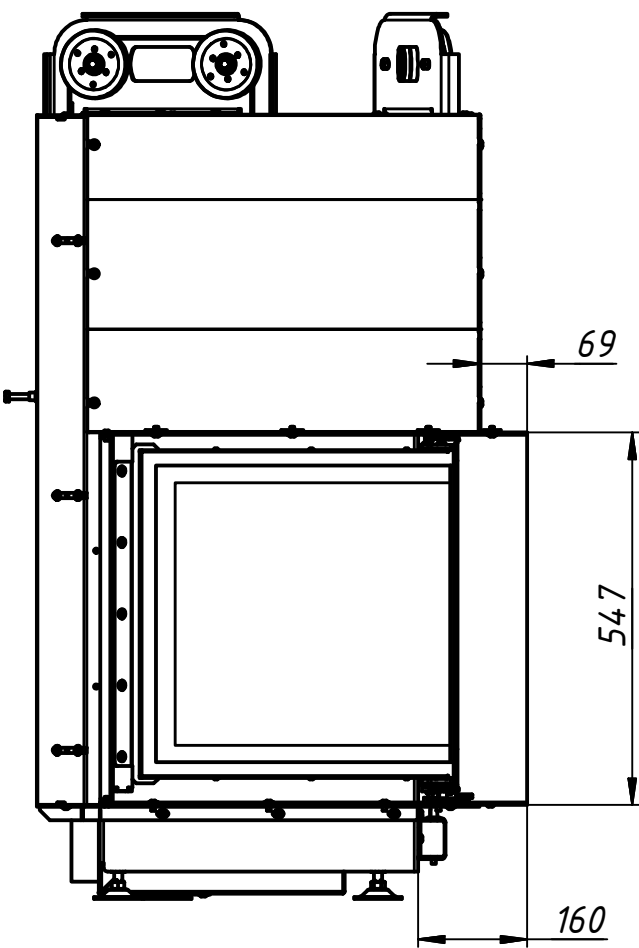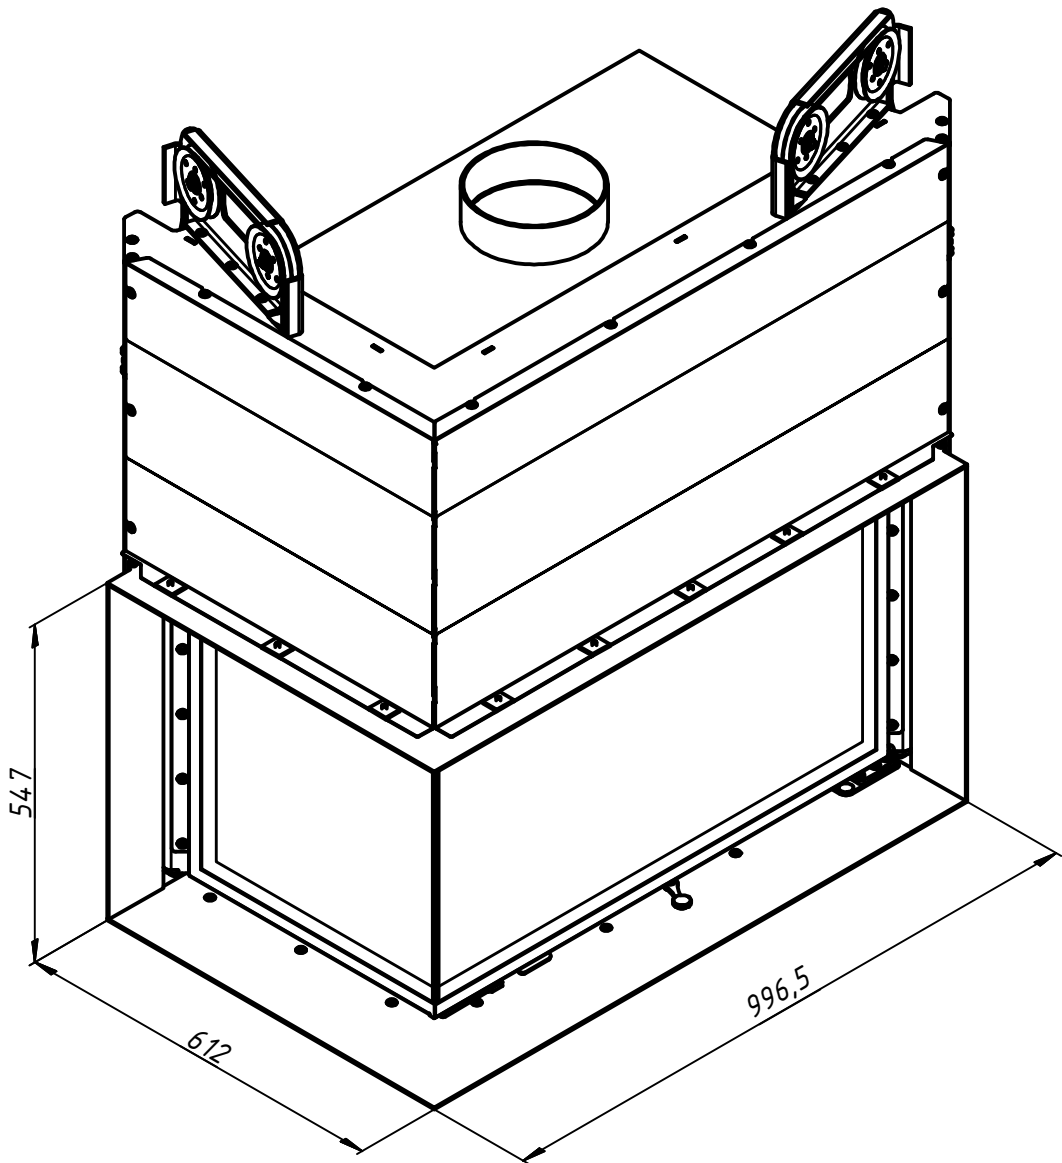

Mounting frame 1x90 (1.5mm)

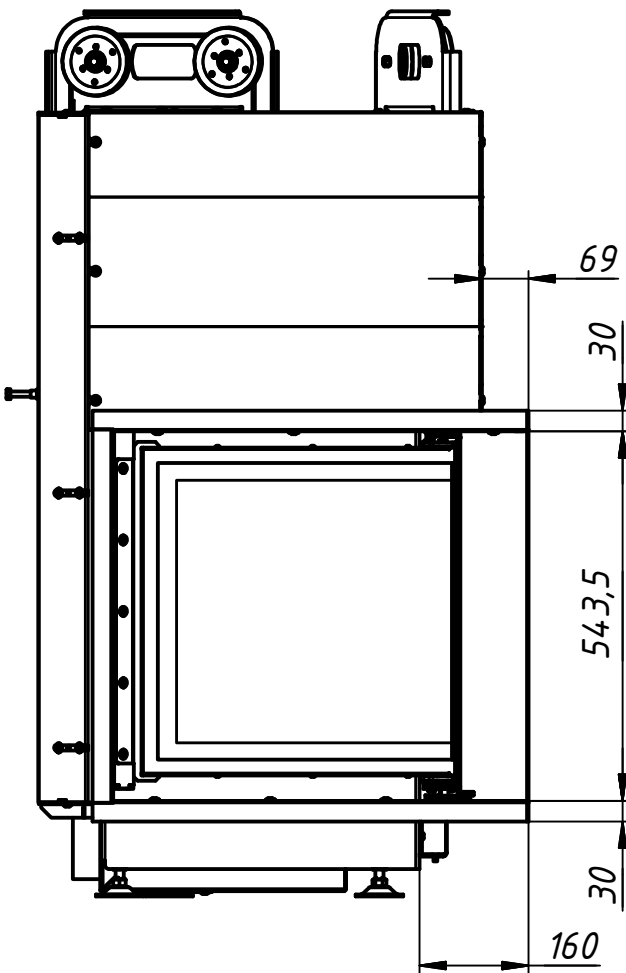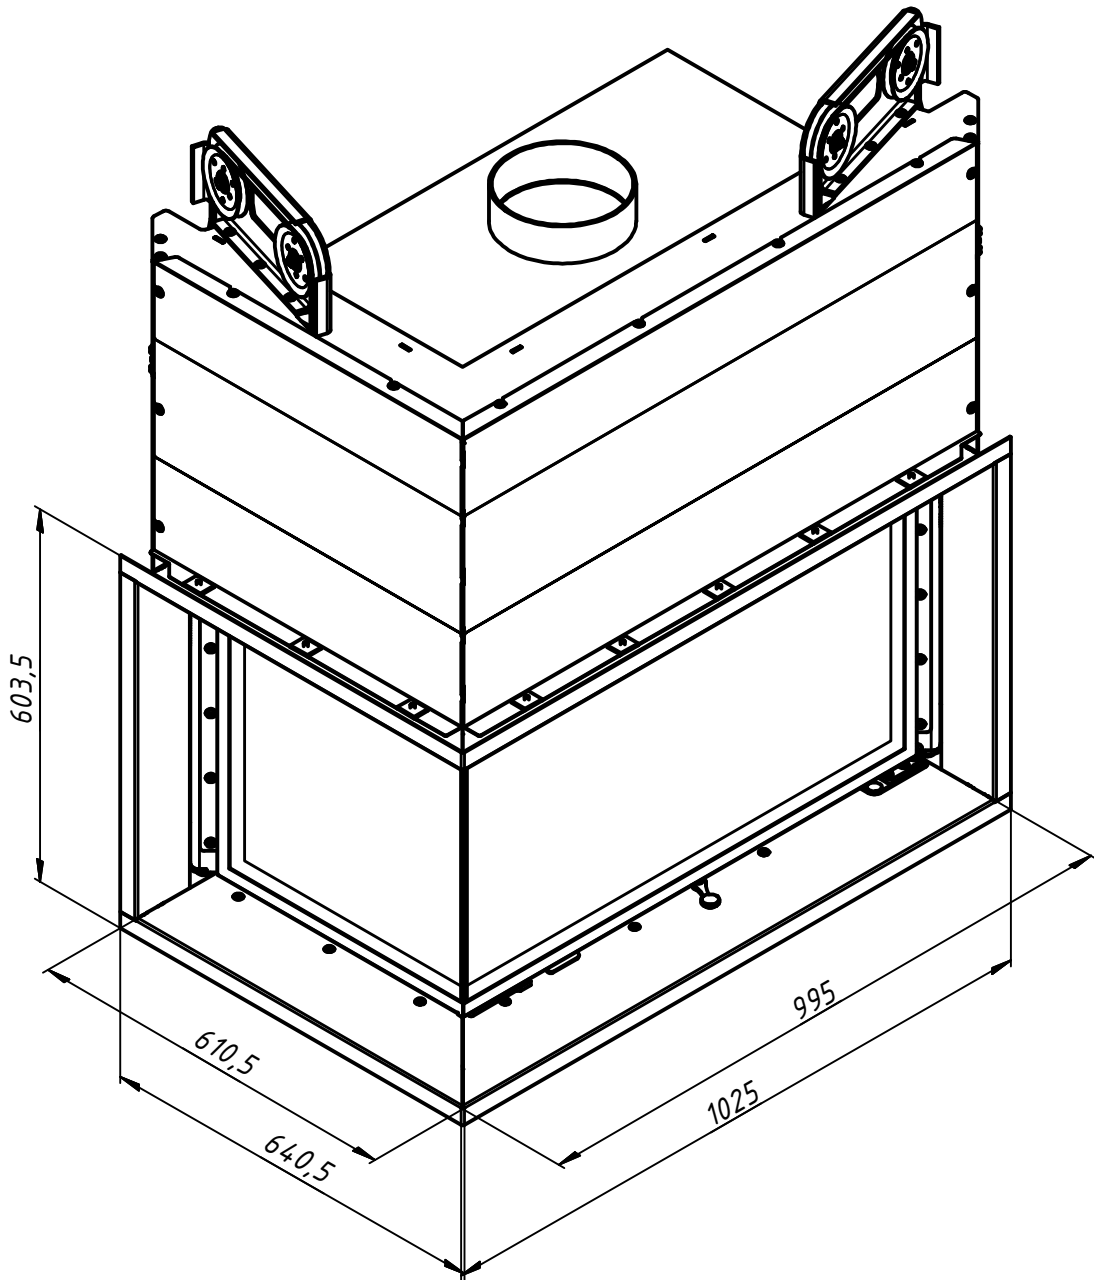

Изм.	Лист	№ докум.	Подп.	Дата

90x51x54 HL

Копировал

Формат А3