

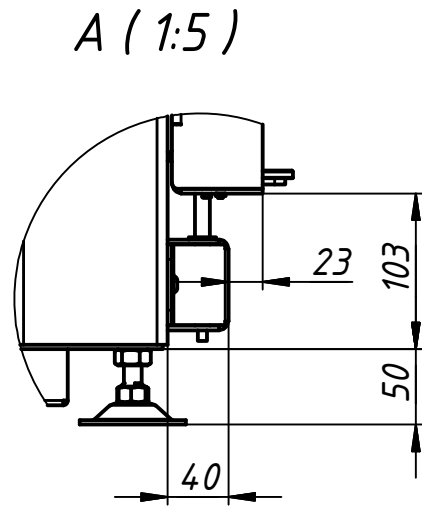
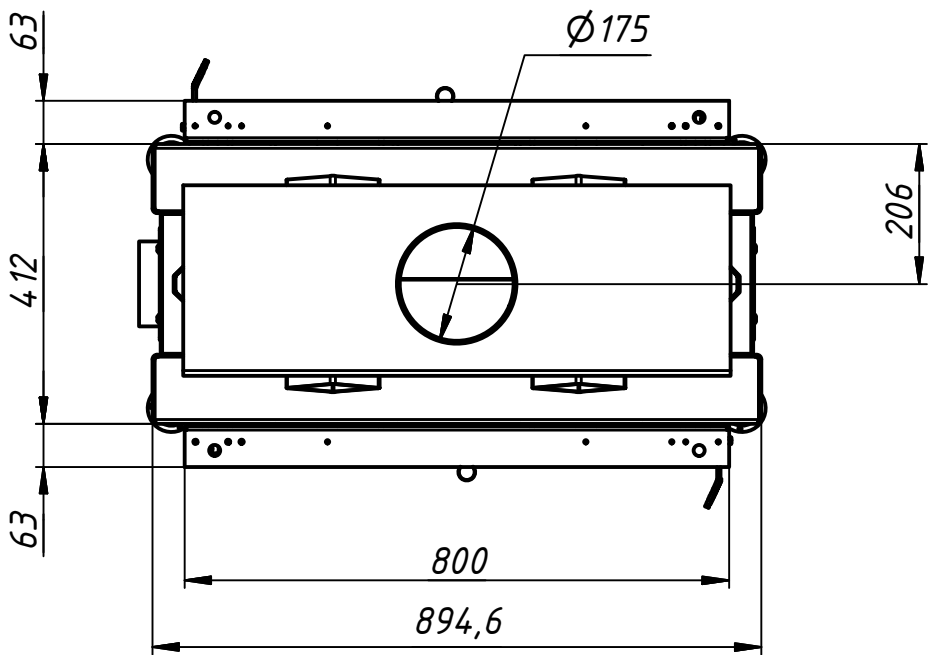


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	12.0
Wood consumption	kg/h	3.7
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	50 / 40
fireplace insert	%	50 / 60
water circuit	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	180
Combustion air connection	mm	125
Minimum radiant area	sq m	5,5
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1200
Minimum outgoing air grating cross-section	sq cm	1400
Log length	cm	30
Weight fireplace with ribbed 40mm chamotte	kg	210
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		-
Increase in size with acumulation set from the side / behind	mm	-- / --

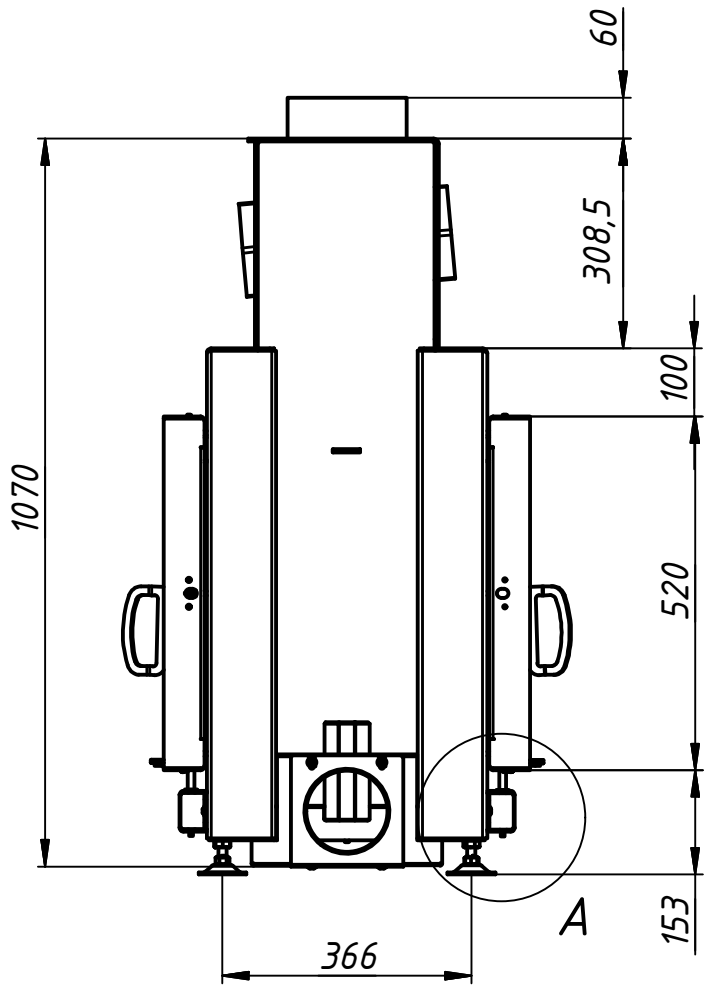

Инв. № подл.	Подп. и дата	Взам. инв. №	Инв. № дубл.	Подп. и дата

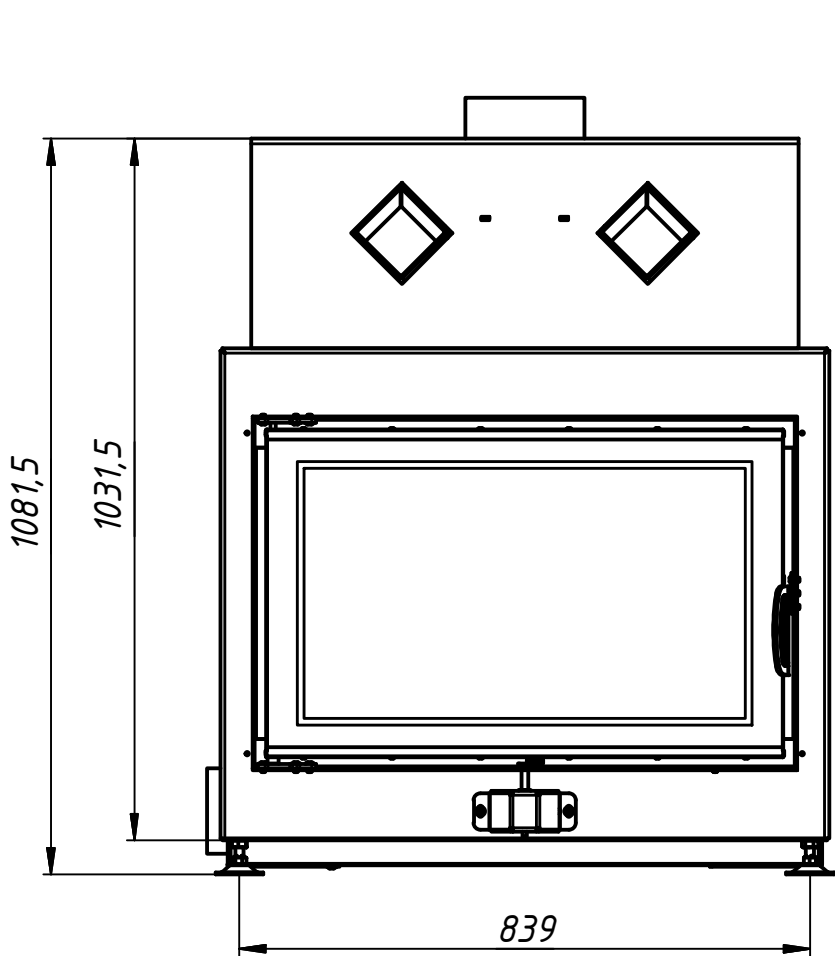

Изм.	Лист	№ докум.	Подп.	Дата

80x52 0

Лист