
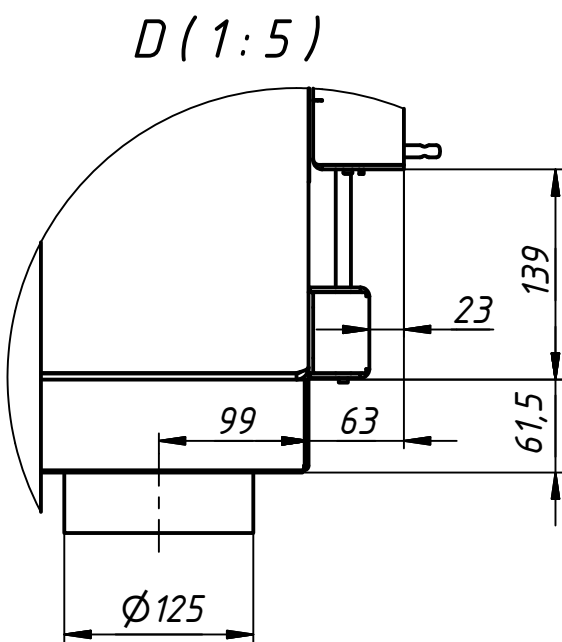
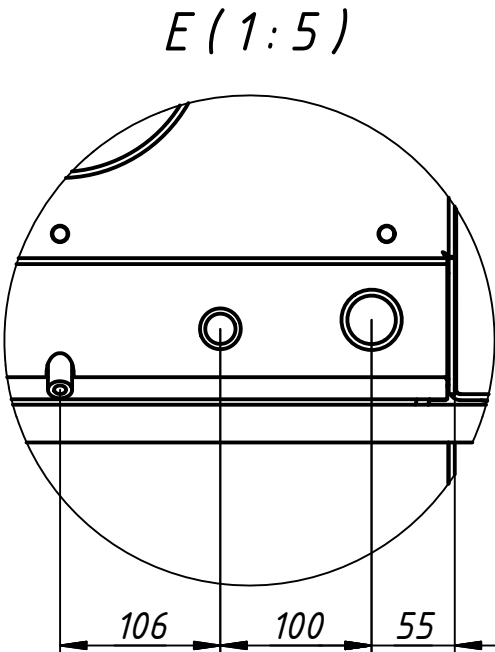
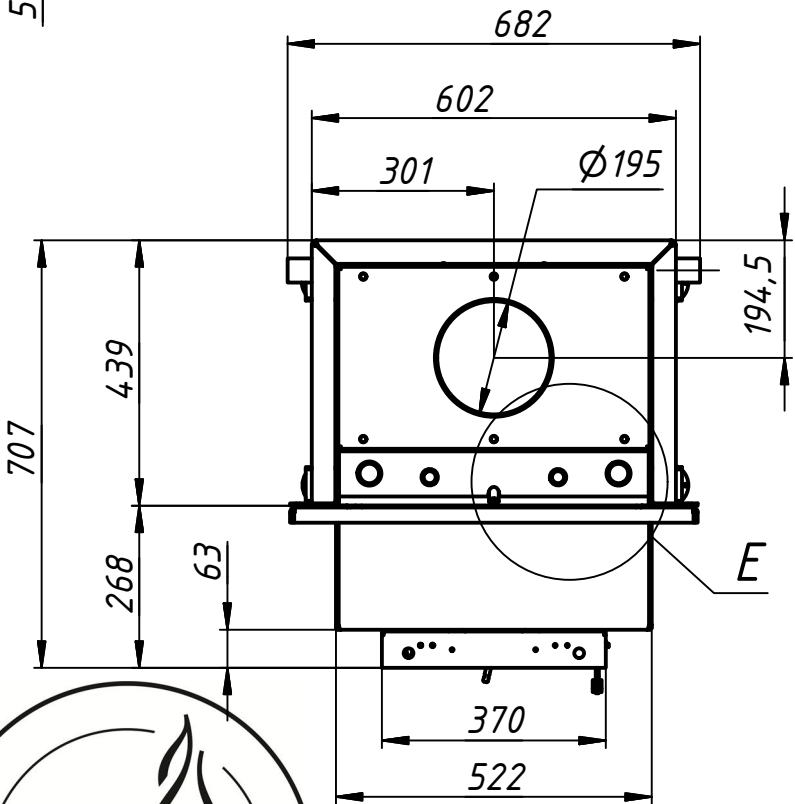
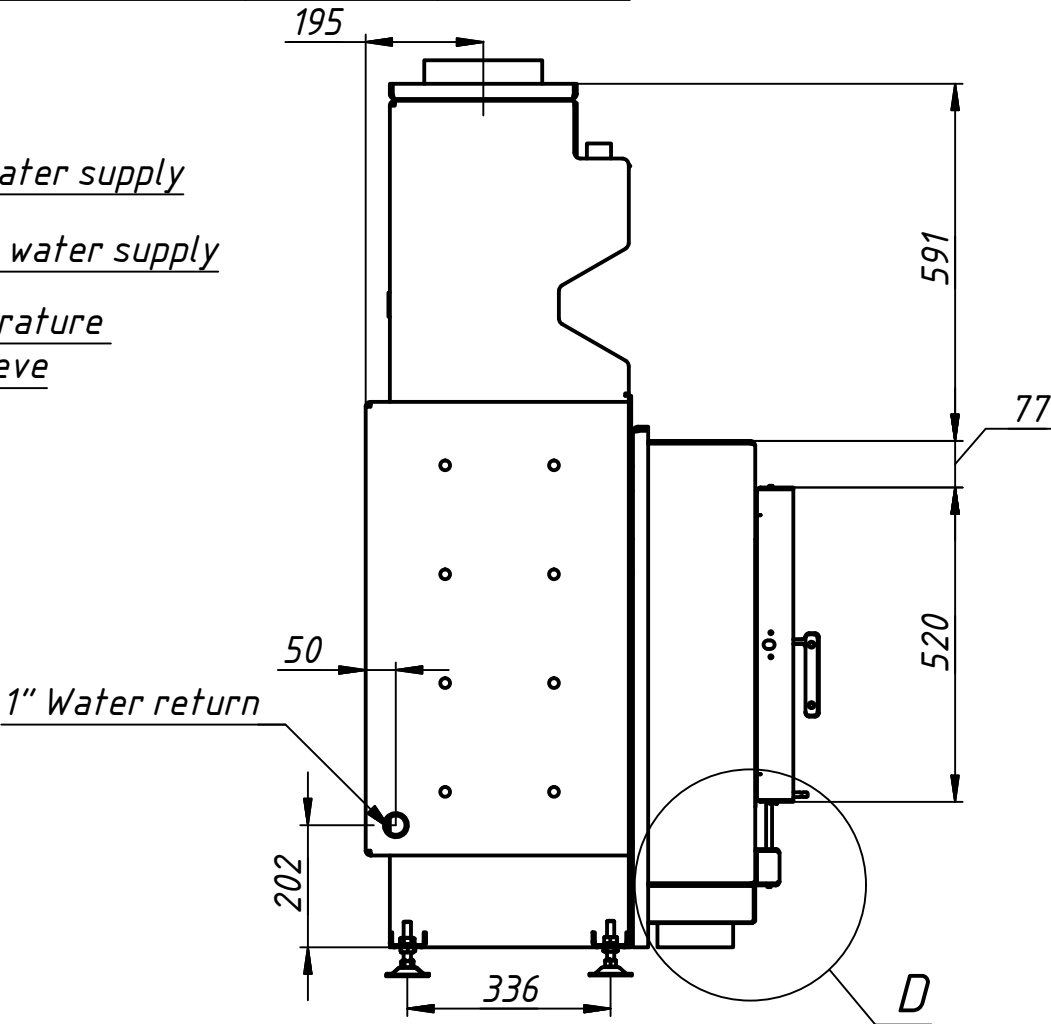


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	24
Wood consumption	kg/h	7
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	25 / 18
fireplace insert	%	7 / 7
water circuit	%	68 / 75
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection	mm	125
Minimum radiant area	sq m	5.6
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	200
Minimum outgoing air grating cross-section	sq cm	200
Log length	cm	30-50
Weight of the fireplace insert	kg	540
Weight of the fireplace insert with the water module	kg	-
Weight of one accumulation set	kg	-
Maximum number of accumulation sets		-
Increase in size with acumulation set from the side / behind	mm	- / -

B

A

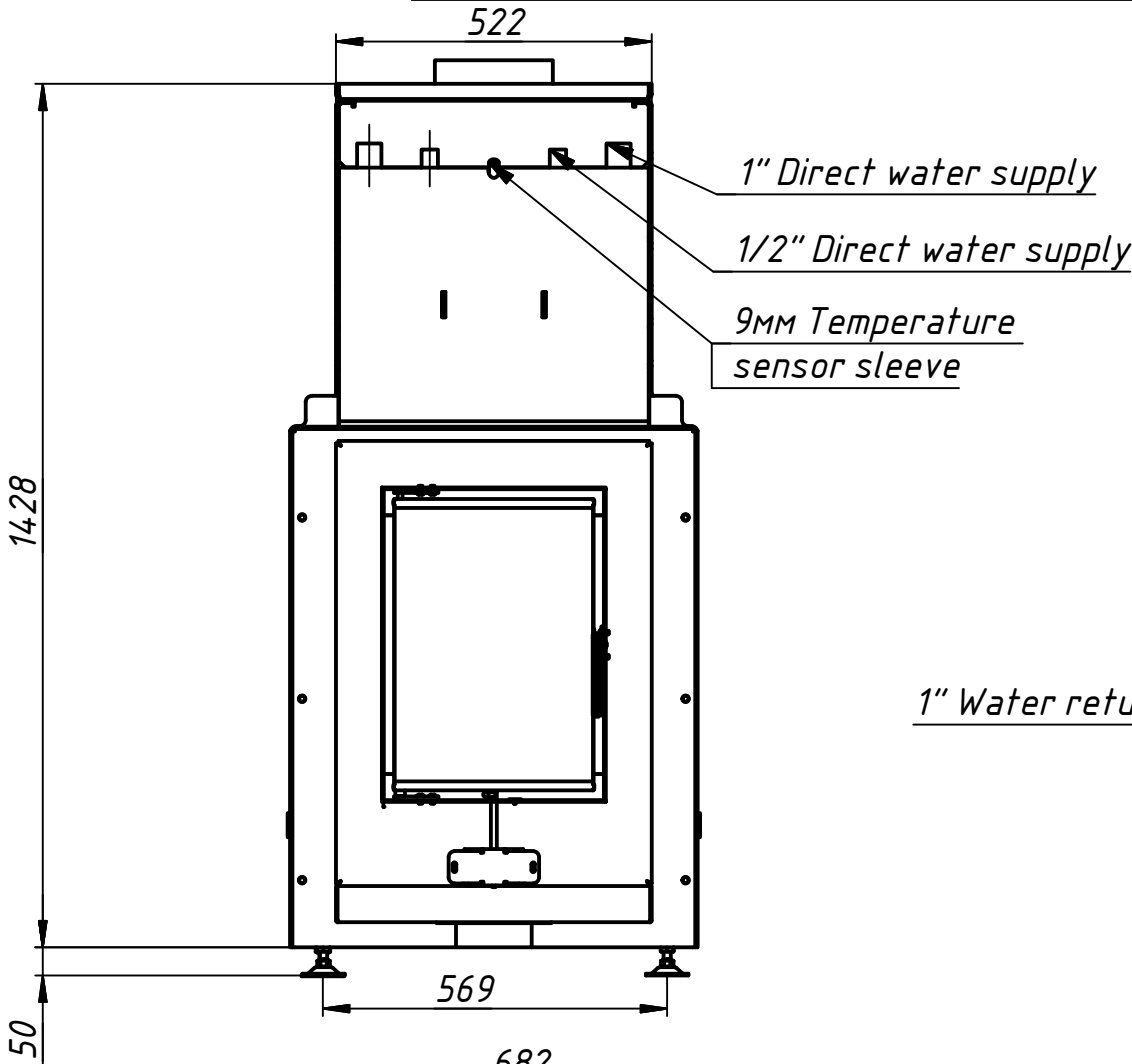

Изм.	Лист	№ докум.	Подп.	Дата

37x52 W2

Лист