


Basic technical information	Values
Nominal heat power	13.5 kW
Power absorbed to water	9.5 kW
Firewood consumption	4.3 kg/h
Combustion flue connection	200 mm
Combustion air connection	125 mm
Flue gas temperature	225 °C
Required chimney pressure	12 Pa
Size of firewood	30-50 cm
Efficiency	> 76%
Total weight (base)	168.5 kg
Weight with ribbed 40mm chamotte ("+" version)	204 kg
Water exchanger specifications	
Tested pressure	4 bar
Working pressure	<2 bar
Water capacity	54 litre
Connections	1"
Cooling loop connection	2 1/2"

The fireplace is certificated according to DSTU 3075-95

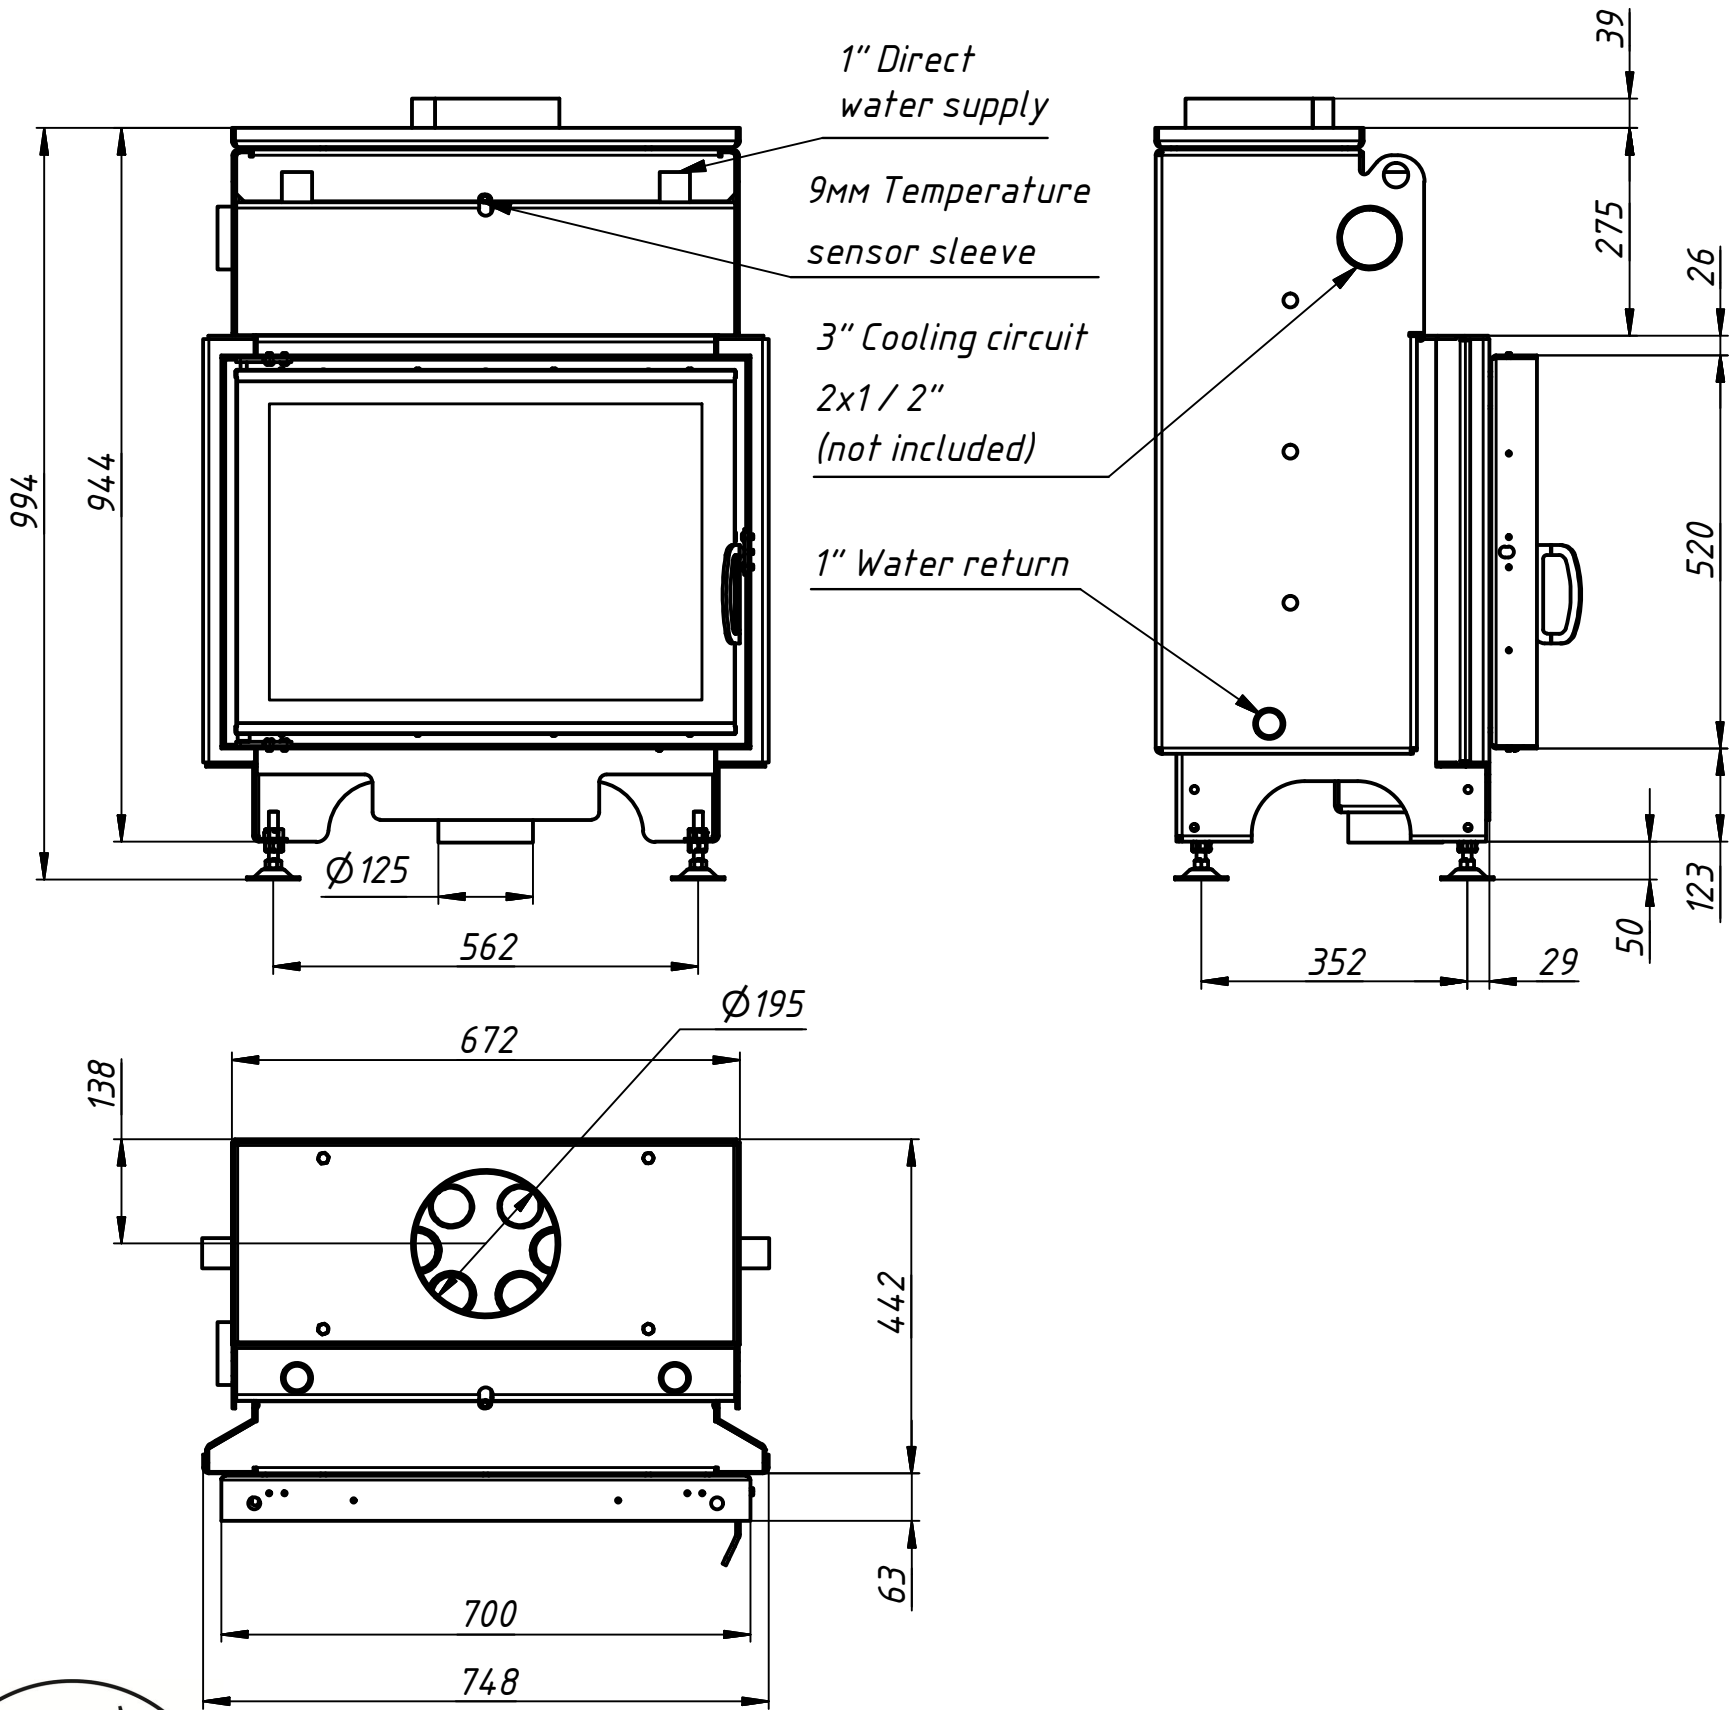

Инв. № подл.	Подп. и дата	Взам. инв. №	Инв. № дудл.	Подп. и дата

Изм.	Лист	№ докум.	Подп.	Дата

B70x52W

Лист