


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	11
Wood consumption	kg/h	3.3
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	30 / 18
fireplace insert	%	20 / 27
water circuit	%	50 / 55
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection	mm	125
Minimum radiant area	sq m	5.0
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	450
Minimum outgoing air grating cross-section	sq cm	550
Log length	cm	30-40
Weight of the fireplace insert	kg	157.5
Weight of the fireplace insert with the water module	kg	263
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		--
Increase in size with accumulation set from the side / behind	mm	-- / --

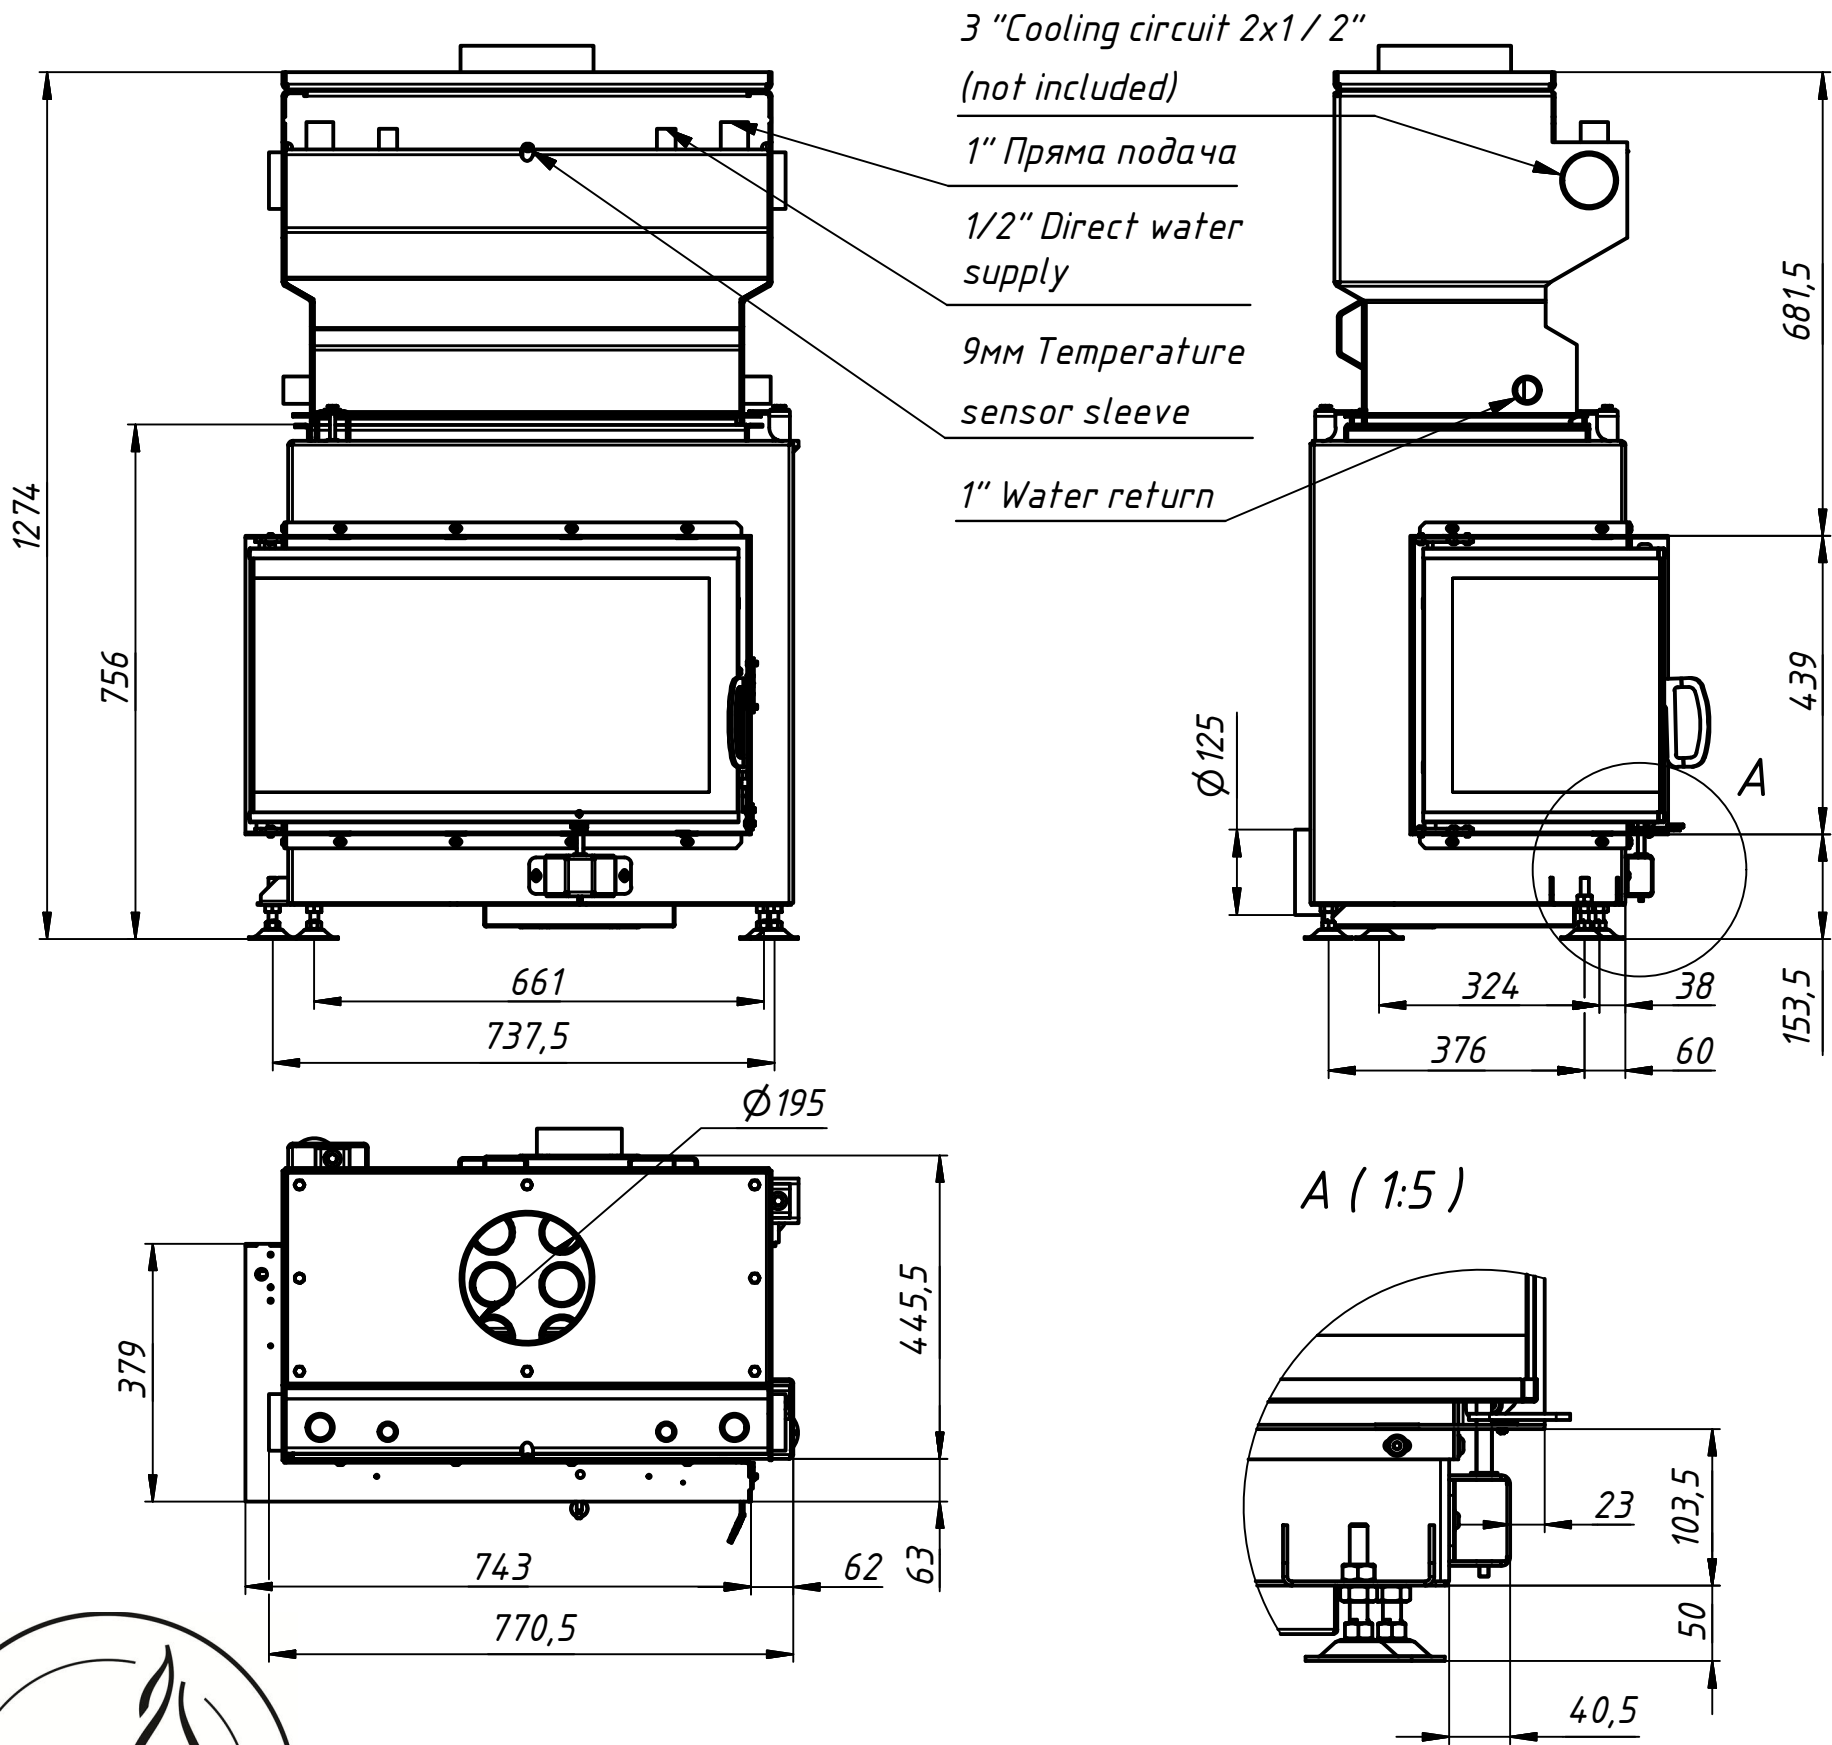

Изм.	Лист	№ докум.	Подп.	Дата

74x37x44 WM

Лист