


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	14
Wood consumption	kg/h	4.1
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	35 / 25
fireplace insert	%	20 / 27
water circuit	%	45 / 48
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection	mm	125
Minimum radiant area	sq m	5.6
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	600
Minimum outgoing air grating cross-section	sq cm	700
Log length	cm	30-50
Weight of the fireplace insert	kg	193.5
Weight of the fireplace insert with the water module	kg	299
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		--
Increase in size with accumulation set from the side / behind	mm	-- / --

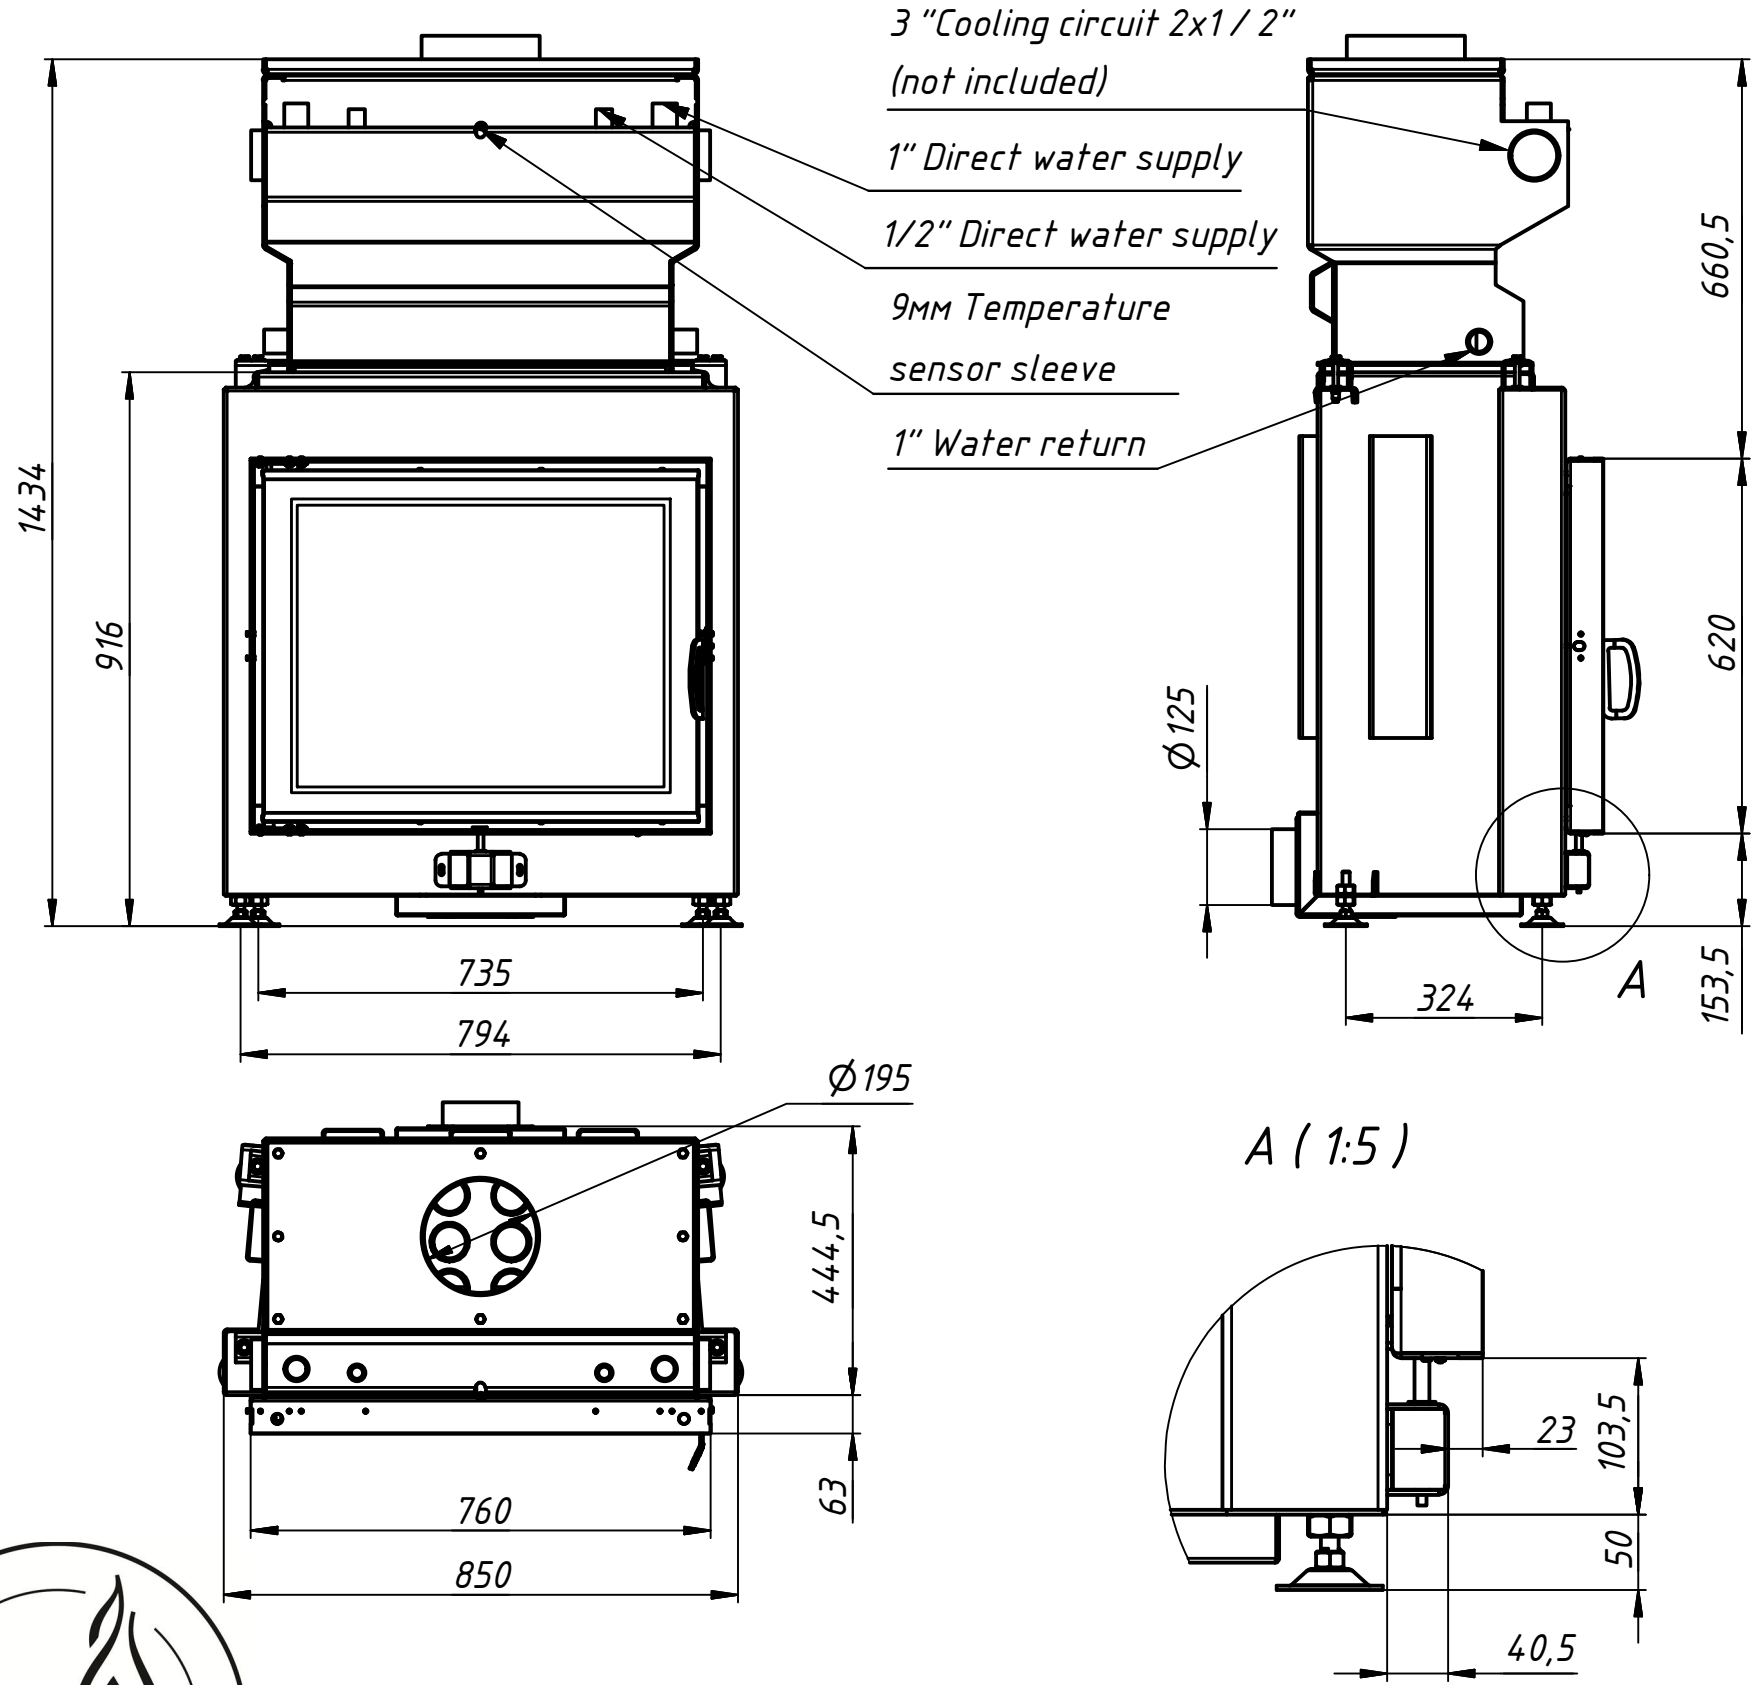

Изм.	Лист	№ докум.	Подп.	Дата

76x52 WM

Лист