

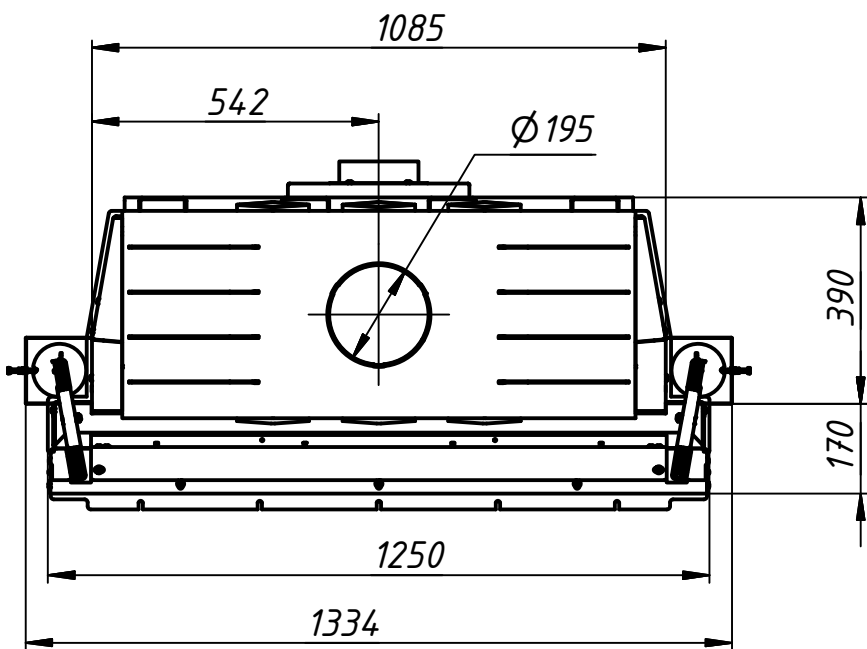
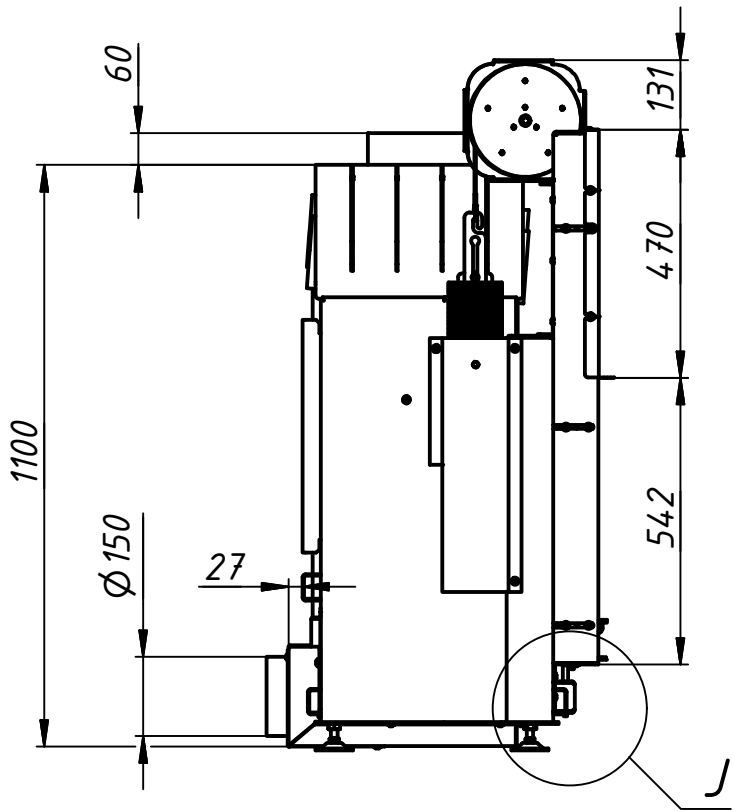


110x52 H

Technical information	Unit	Value
Tested according to	-	-
Rated heat power	kW	17
Fire wood volume	kg/h	5.1
Efficiency	%	80
Heat distribution		
Glass pane (single / double)	%	35 / --
Insert / fireplace surface	%	65 / --
Boiler	%	--/ --
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection diameter	mm	150
Minimal distances of the fireplace to cladding, insulation layer	mm	60
Cross-section of gratings		
Convection air	sq cm	2200
Supply air	sq cm	2600
Recommended log length	cm	30-50
Fireplace weight with 40mm chamotte plates	kg	335
Fireplace weight with 30mm chamotte plates	kg	325
Quantity of accumulation blocks	pcs	4


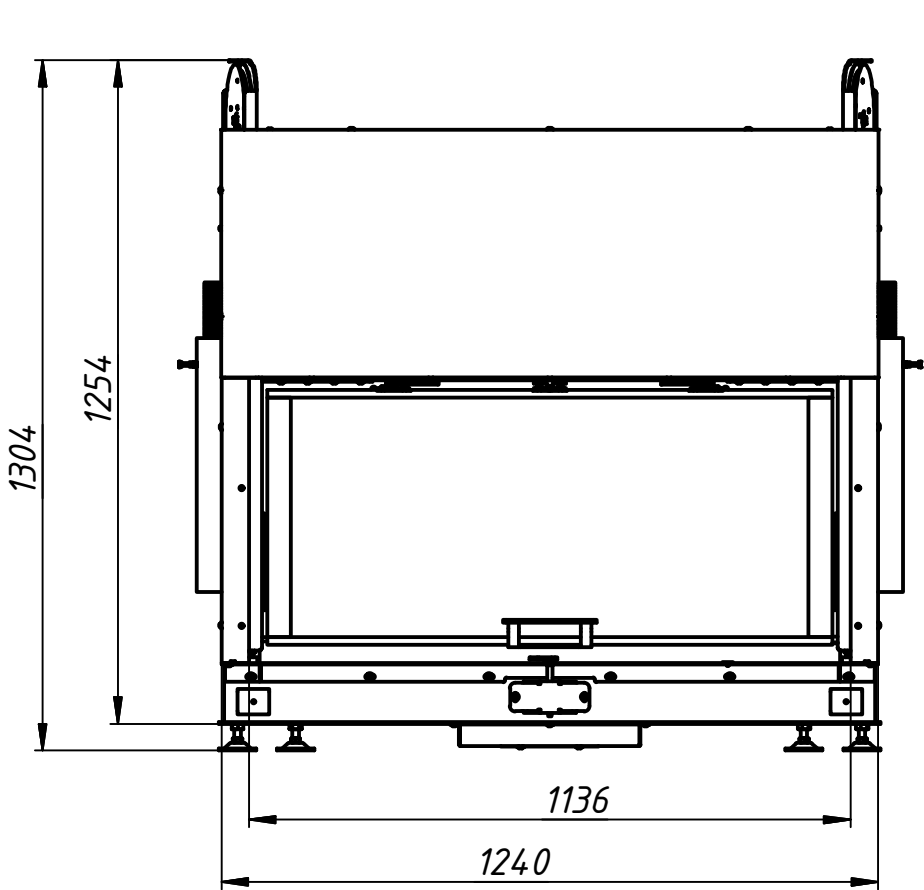


J (1 : 4)


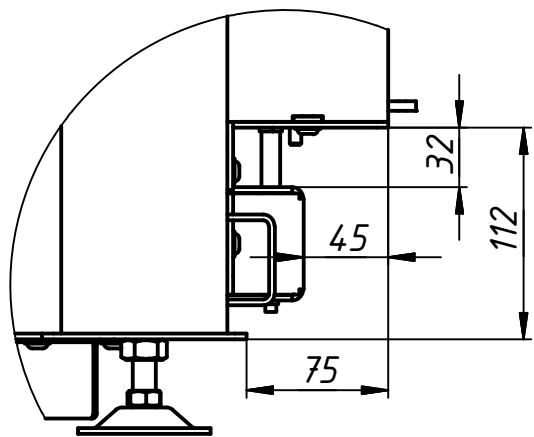


110x52 H

Mounting Frame 1x90 (1.5mm)

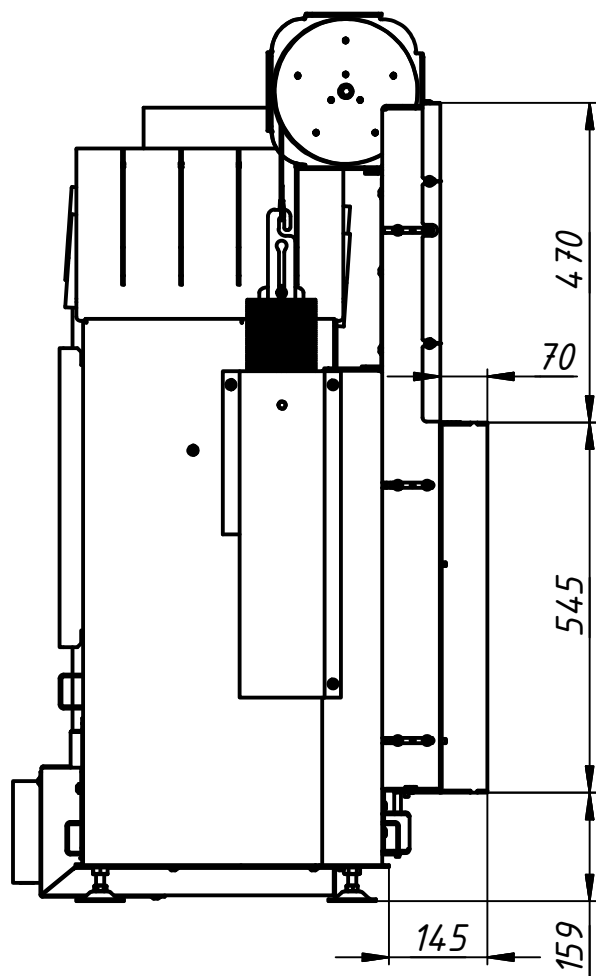
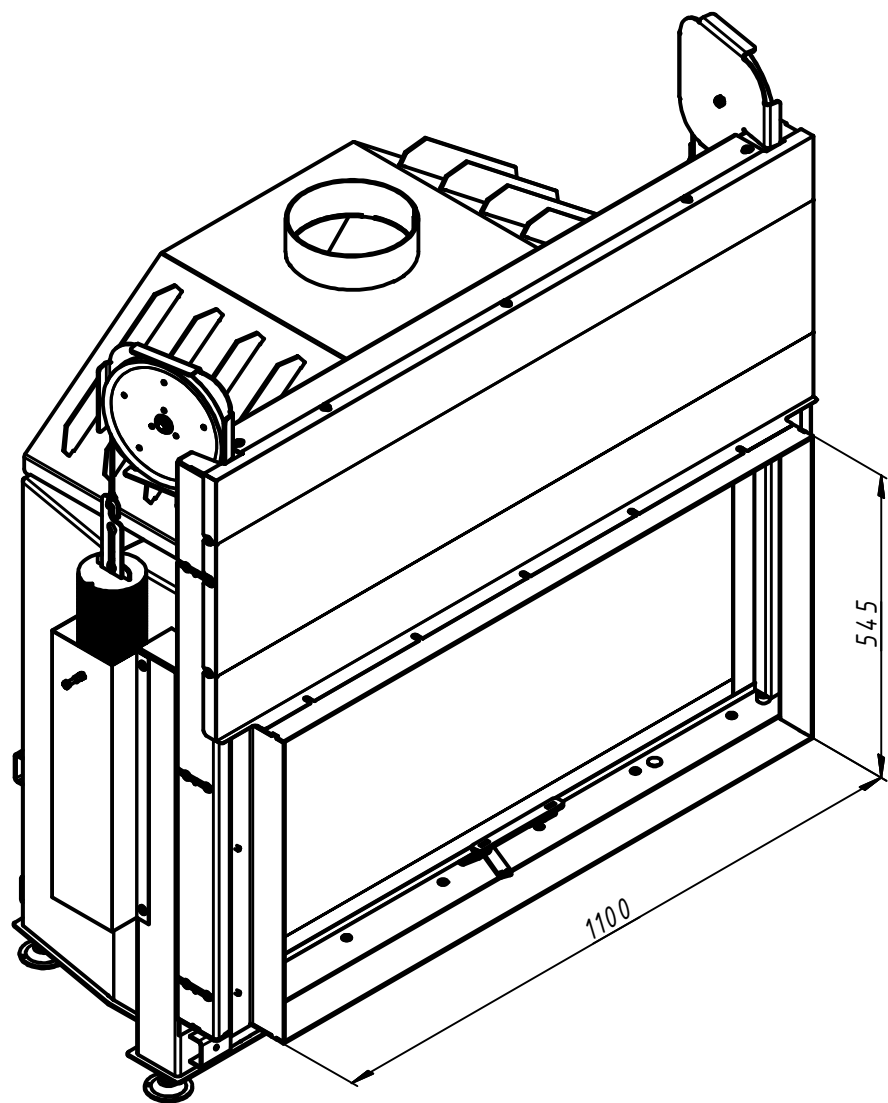


Mounting Frame 3mm

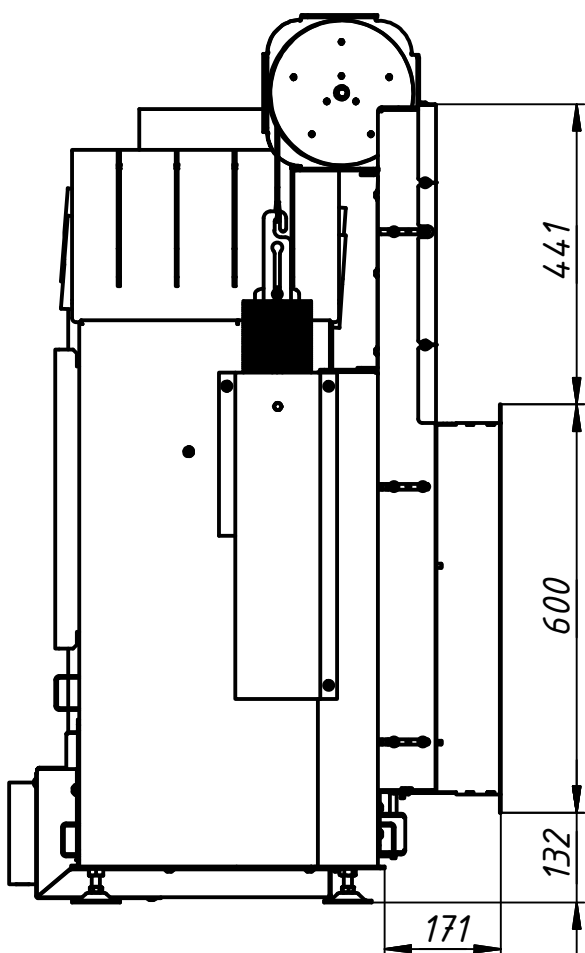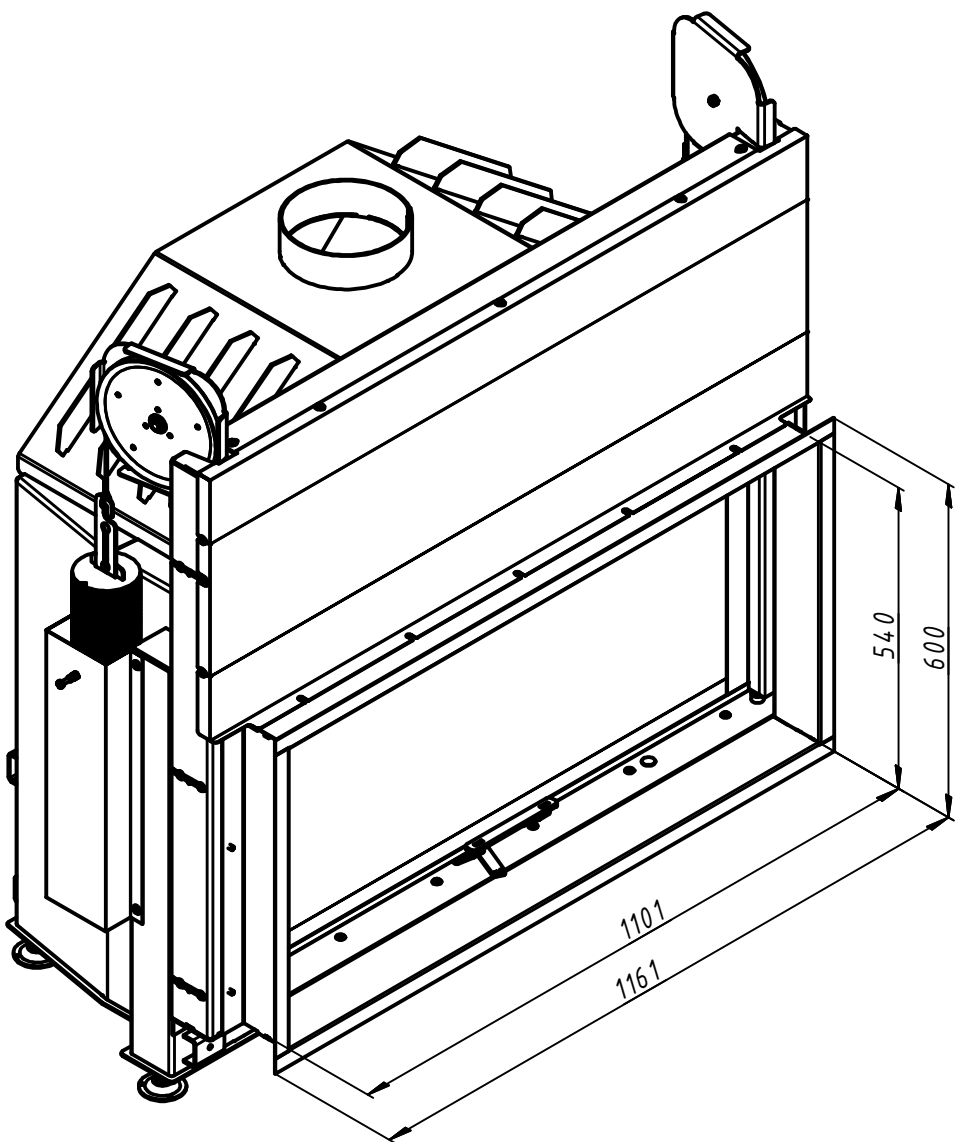


110x52 H


Accumulation blocks

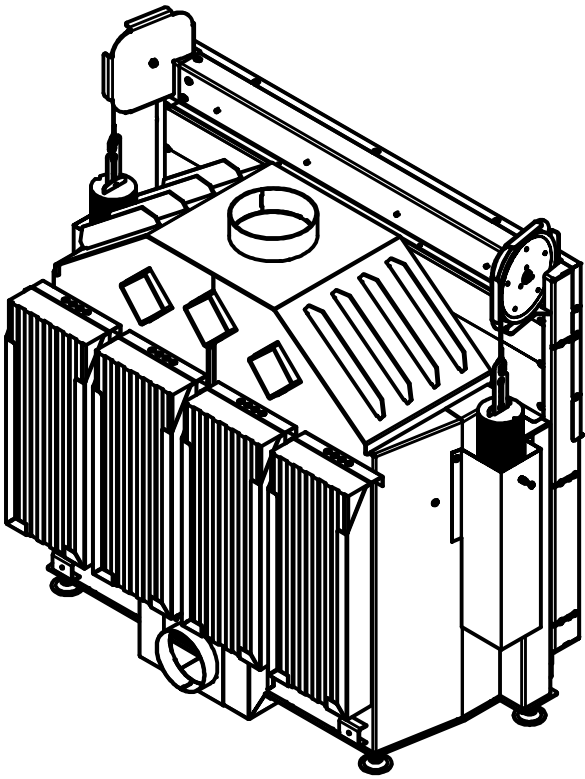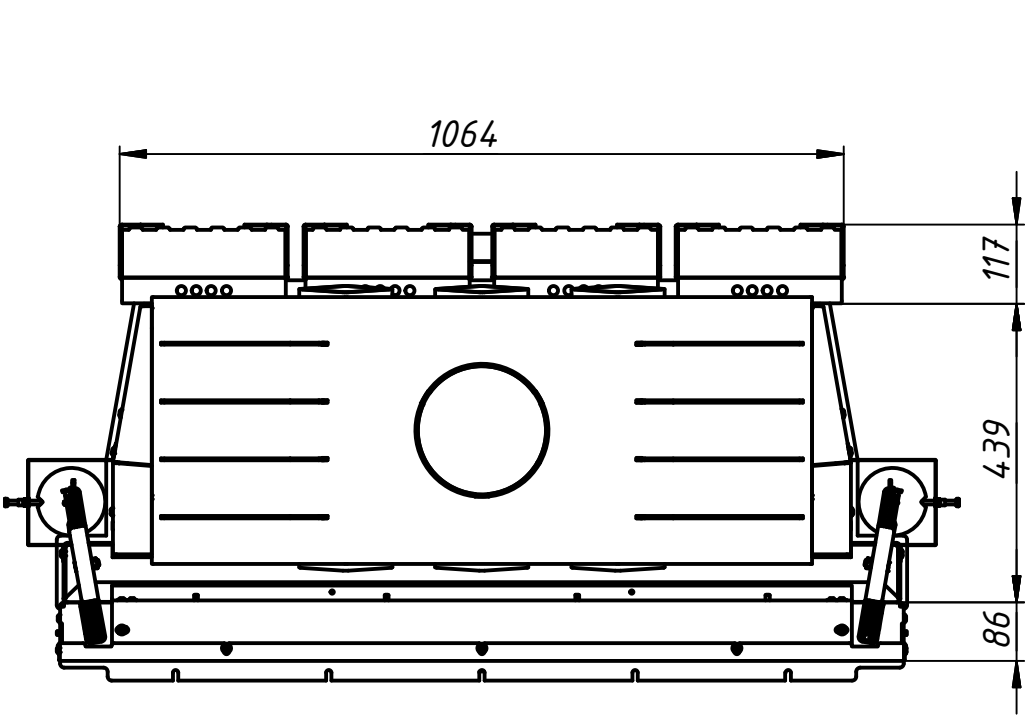

Legs position
(bottom view)

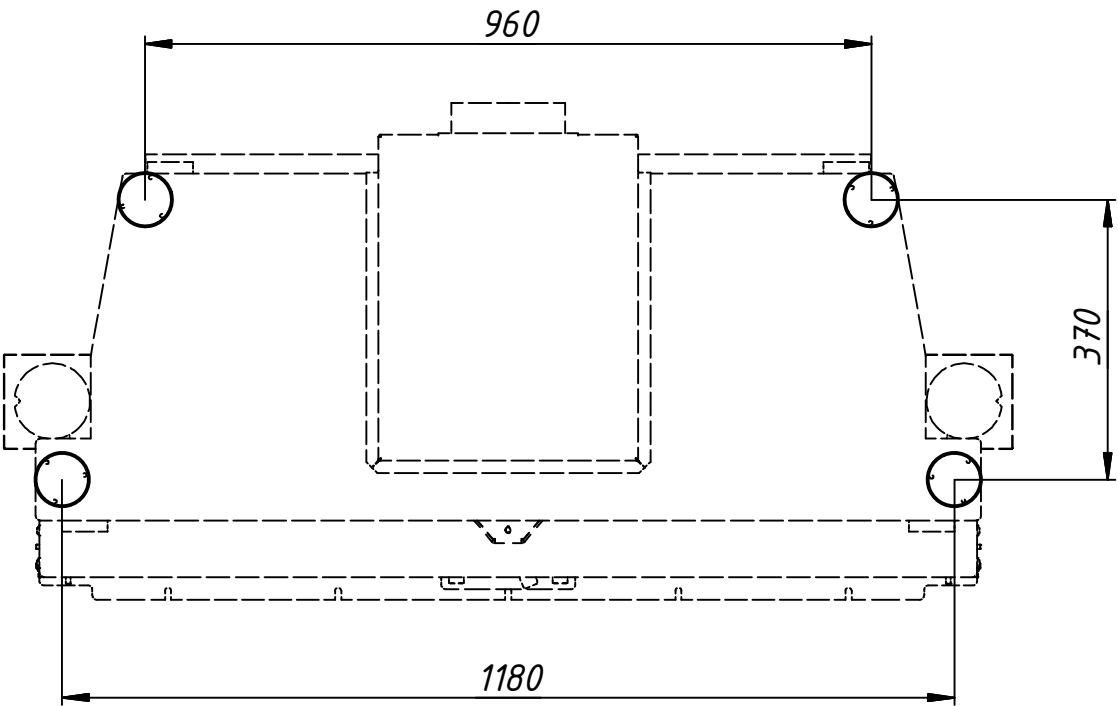

The default leg



The longer leg

