
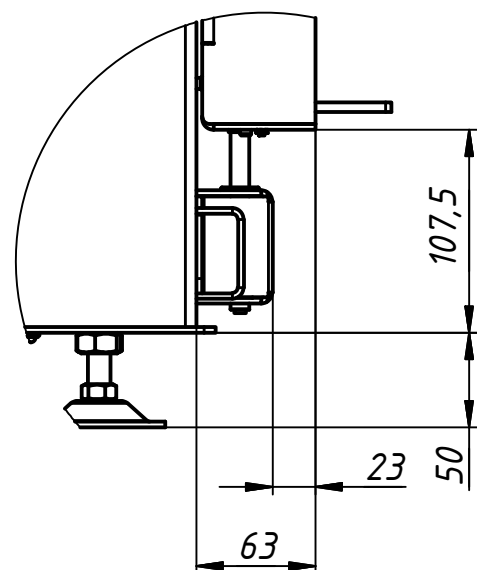

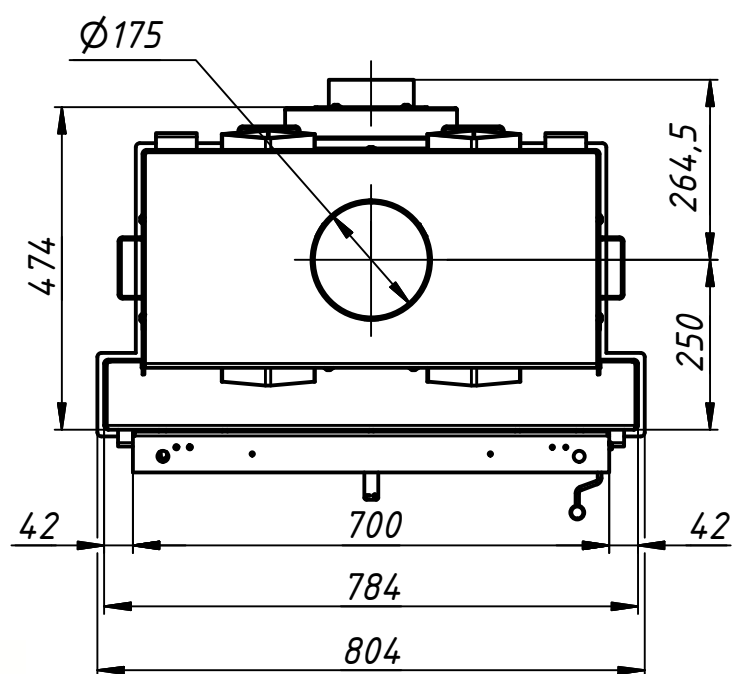
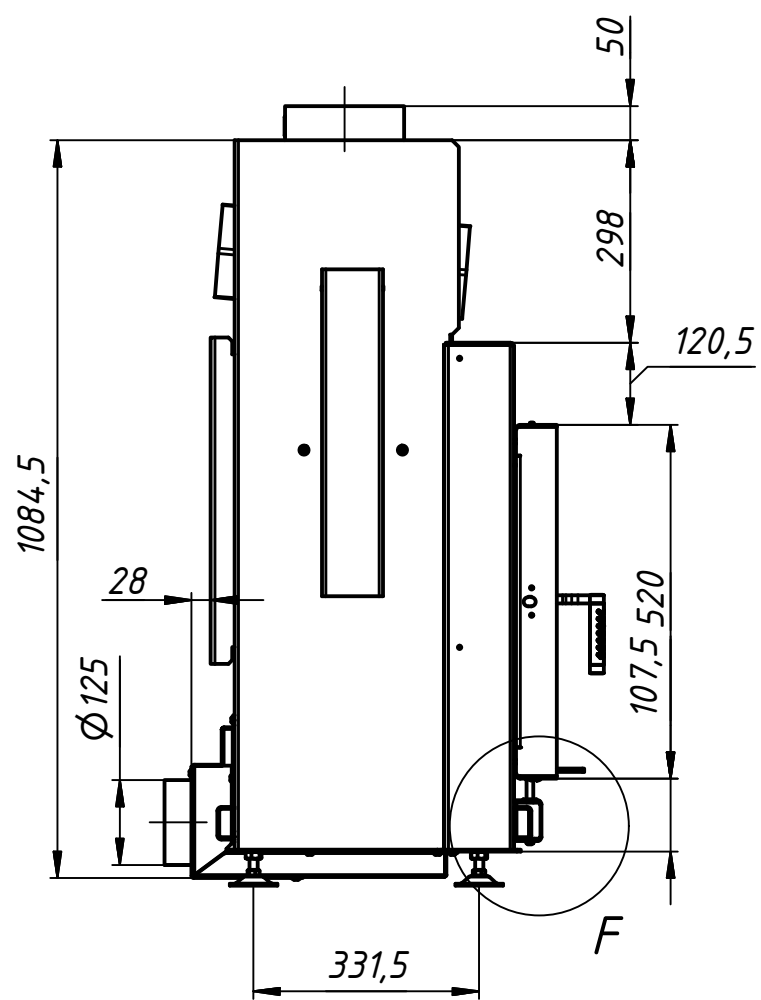



70x52

<i>Technical information</i>	<i>Unit</i>	<i>Value</i>
<i>Tested according to</i>	–	–
<i>Rated heat power</i>	<i>kW</i>	<i>11.5</i>
<i>Fire wood volume</i>	<i>kg/h</i>	<i>3.3</i>
<i>Efficiency</i>	<i>%</i>	<i>>80</i>
<i>Heat distribution</i>		
<i>Glass pane (single / double)</i>	<i>%</i>	<i>30 / 20</i>
<i>Insert / fireplace surface</i>	<i>%</i>	<i>70 / 80</i>
<i>Boiler</i>	<i>%</i>	<i>-- / --</i>
<i>Required chimney pressure</i>	<i>Pa</i>	<i>11</i>
<i>Chimney diameter</i>	<i>mm</i>	<i>180</i>
<i>Combustion air connection diameter</i>	<i>mm</i>	<i>125</i>
<i>Minimal distances of the fireplace to cladding, insulation layer</i>	<i>mm</i>	<i>60</i>
<i>Cross-section of gratings</i>		
<i>Convection air</i>	<i>sq cm</i>	<i>1600</i>
<i>Supply air</i>	<i>sq cm</i>	<i>1900</i>
<i>Recommended log length</i>	<i>cm</i>	<i>30–40</i>
<i>Fireplace weight with 40mm chamotte plates</i>	<i>kg</i>	<i>163</i>
<i>Fireplace weight with 30mm chamotte plates</i>	<i>kg</i>	<i>154</i>
<i>Quantity of accumulation blocks</i>	<i>pcs</i>	<i>4</i>

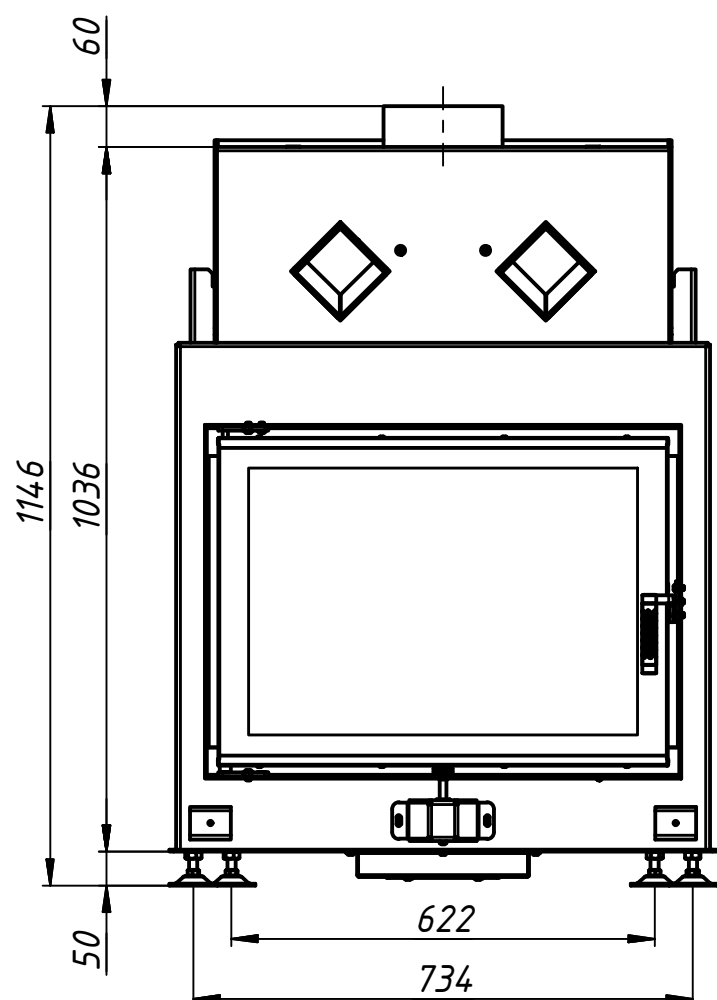


70x52

Mounting frame 2x45 (1.5mm)

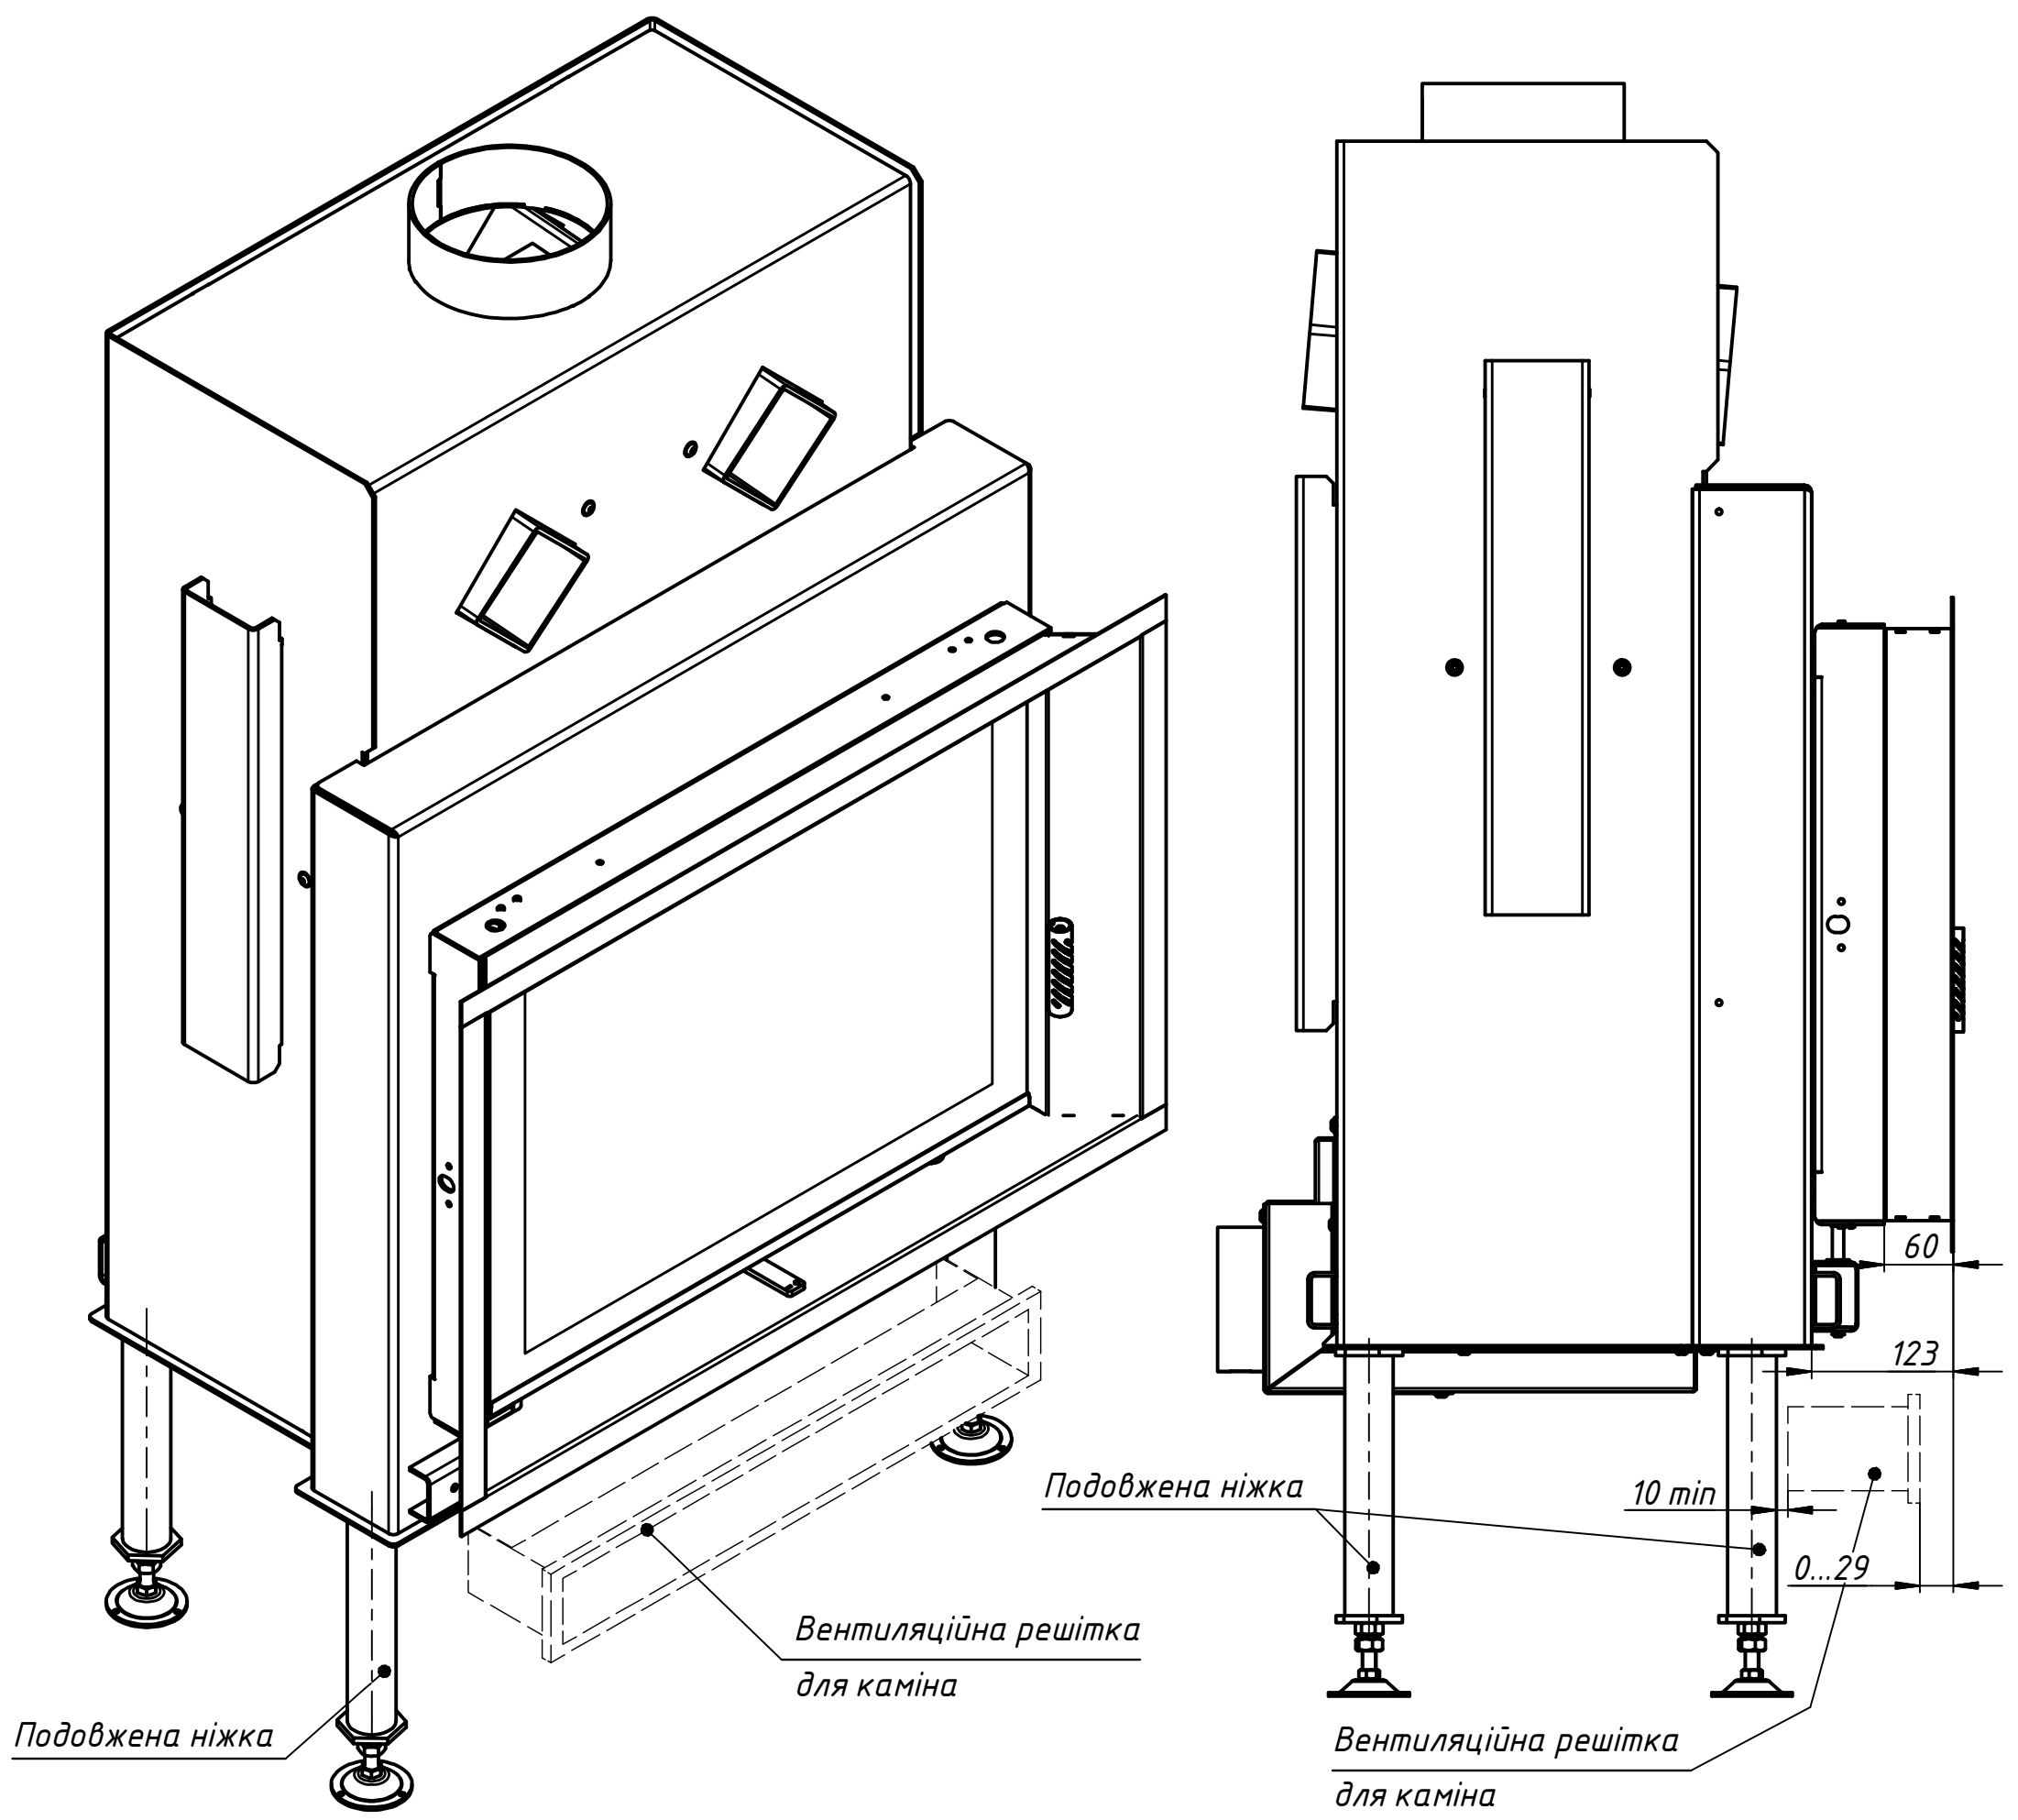


70x52


Accumulation blocks

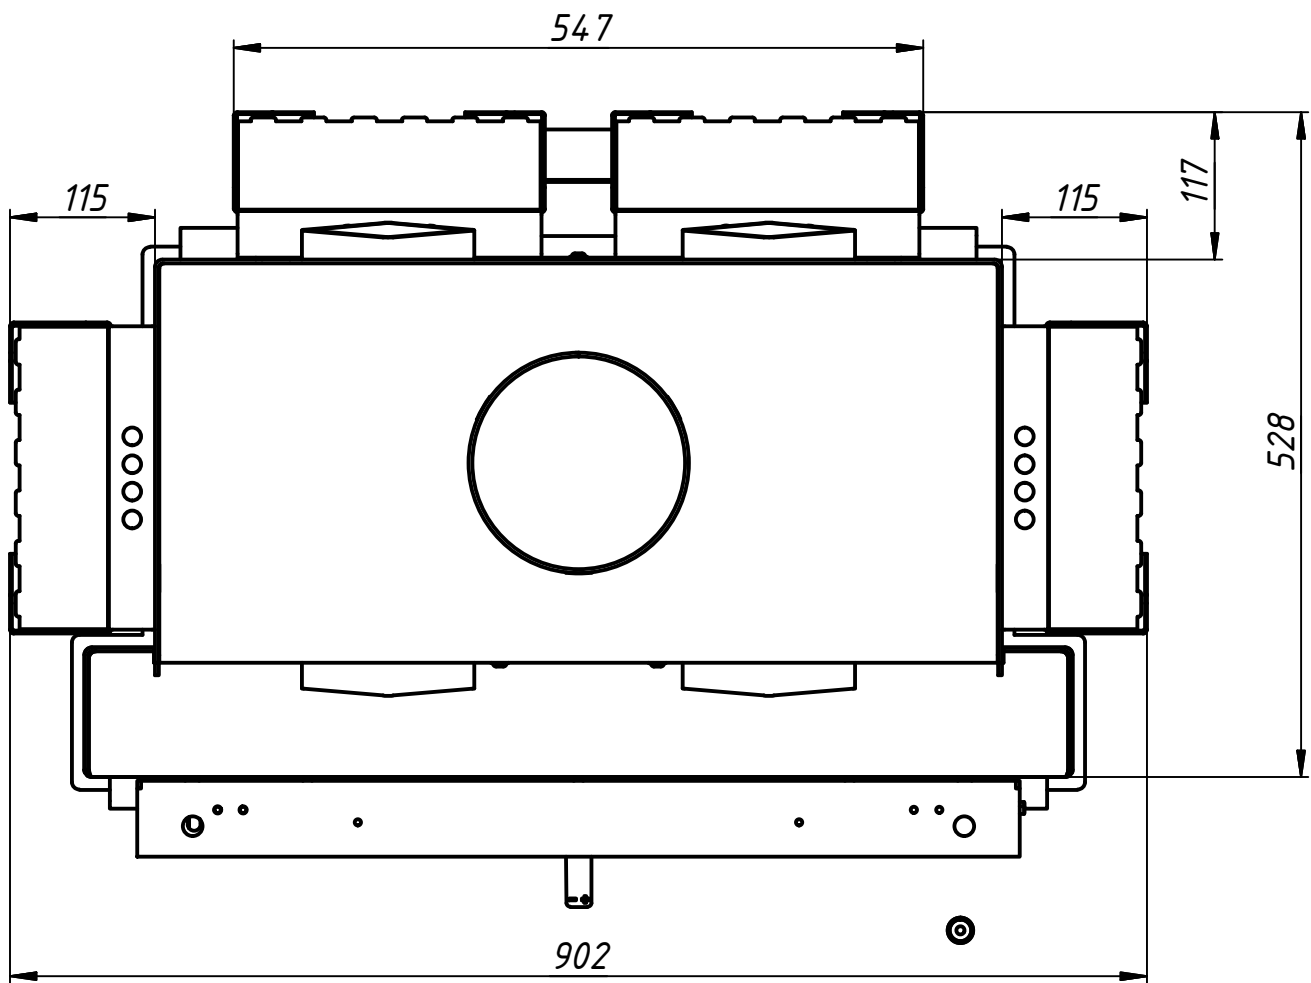

Legs position
(bottom view)

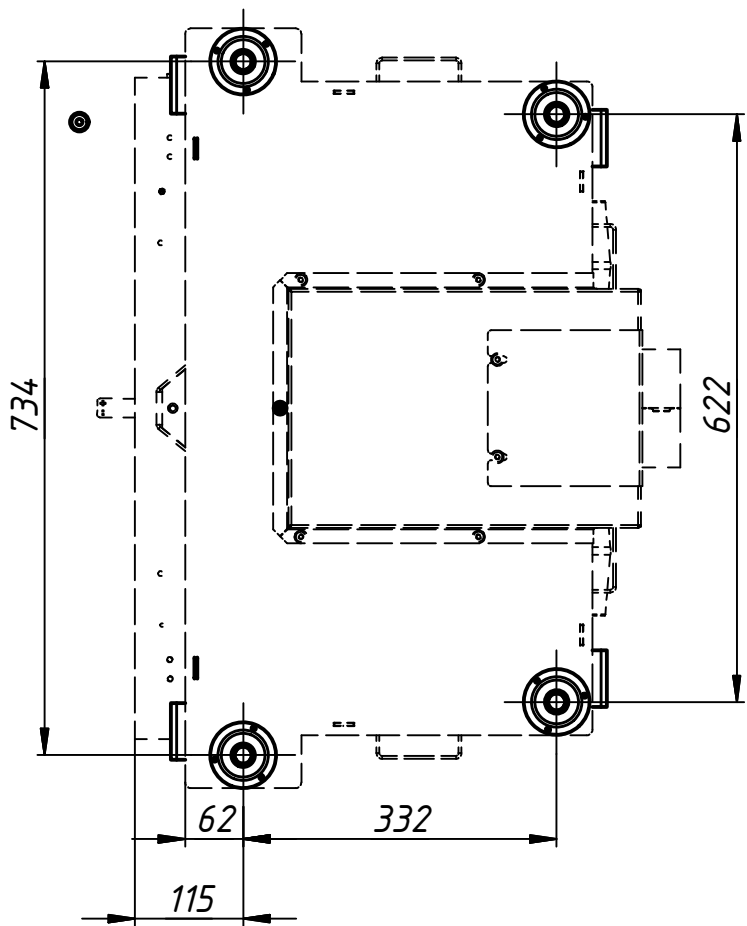

The longer leg

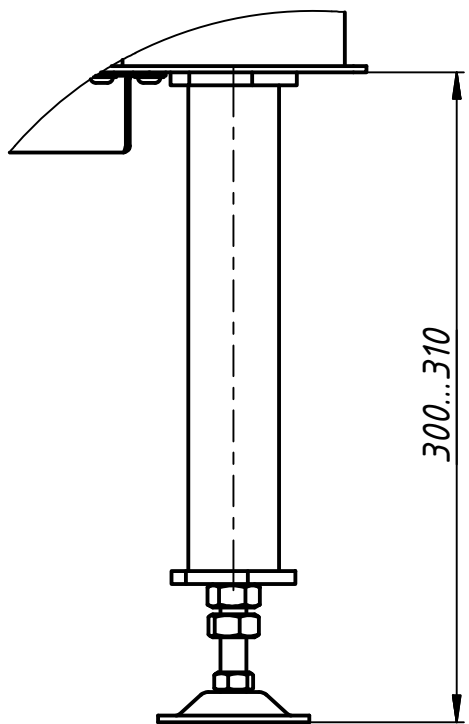

The default leg

