

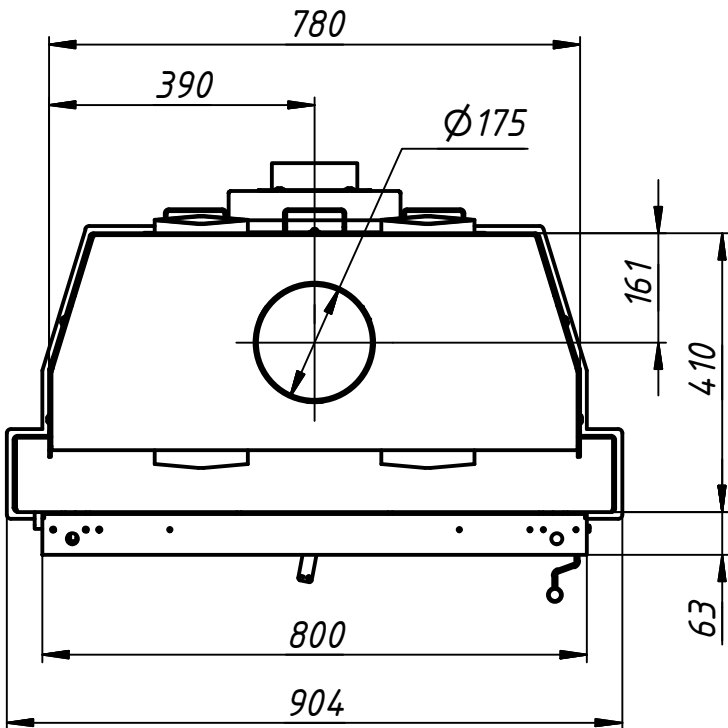
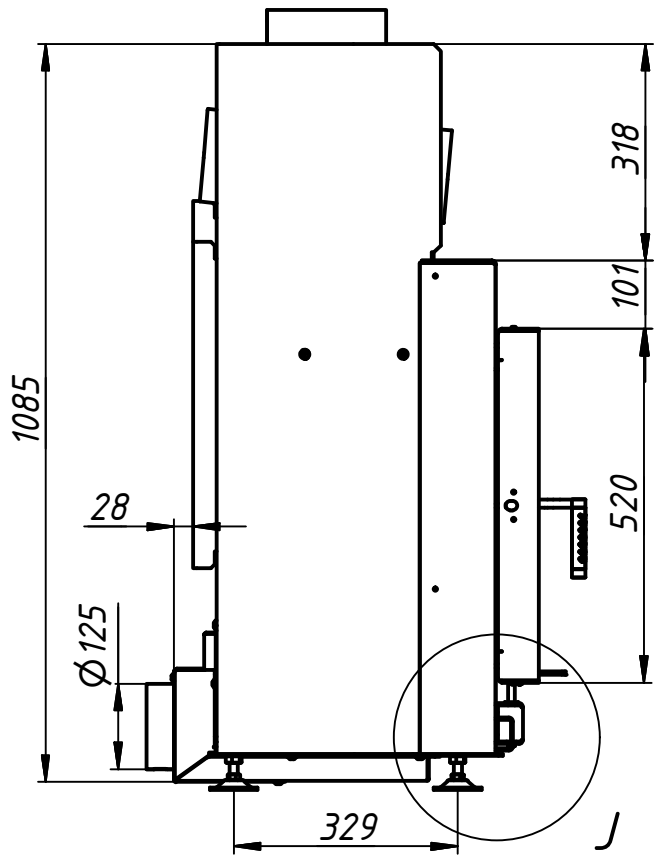


80x52


Technical information	Unit	Value
Tested according to	-	-
Rated heat power	kW	12.0
Fire wood volume	kg/h	3.7
Efficiency	%	>80
Heat distribution		
Glass pane (single / double)	%	30 / 20
Insert / fireplace surface	%	70 / 80
Boiler	%	-- / --
Required chimney pressure	Pa	11
Chimney diameter	mm	180
Combustion air connection diameter	mm	125
Minimal distances of the fireplace to cladding, insulation layer	mm	60
Cross-section of gratings		
Convection air	sq cm	1650
Supply air	sq cm	2000
Recommended log length	cm	30-40
Fireplace weight with 40mm chamotte plates	kg	165
Fireplace weight with 30mm chamotte plates	kg	157
Quantity of accumulation blocks	pcs	2

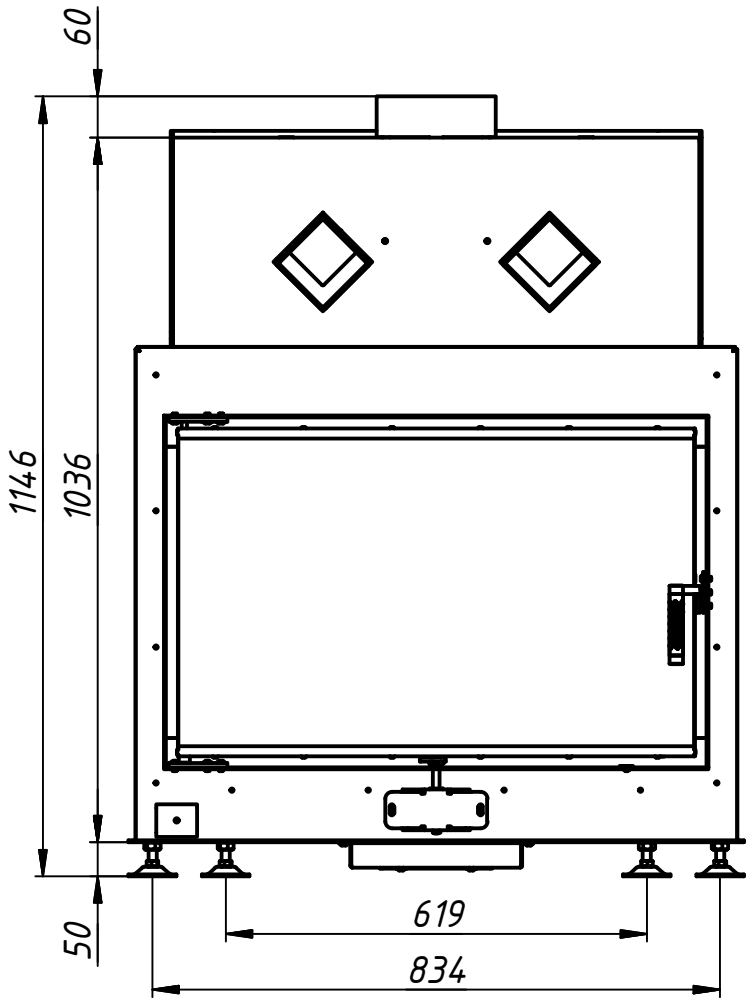


J (1 : 4)

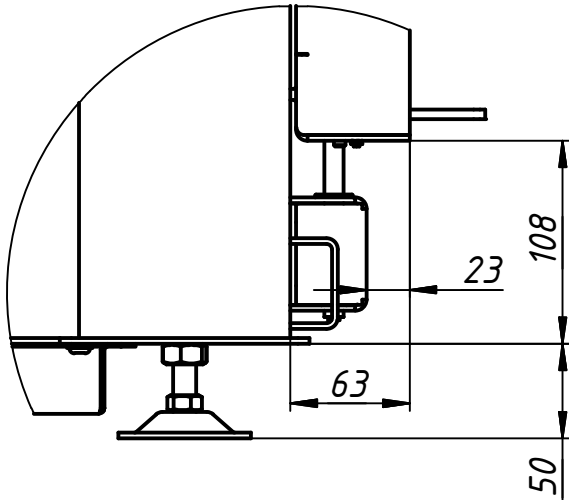

Mounting frame 2x45 (1.5mm)

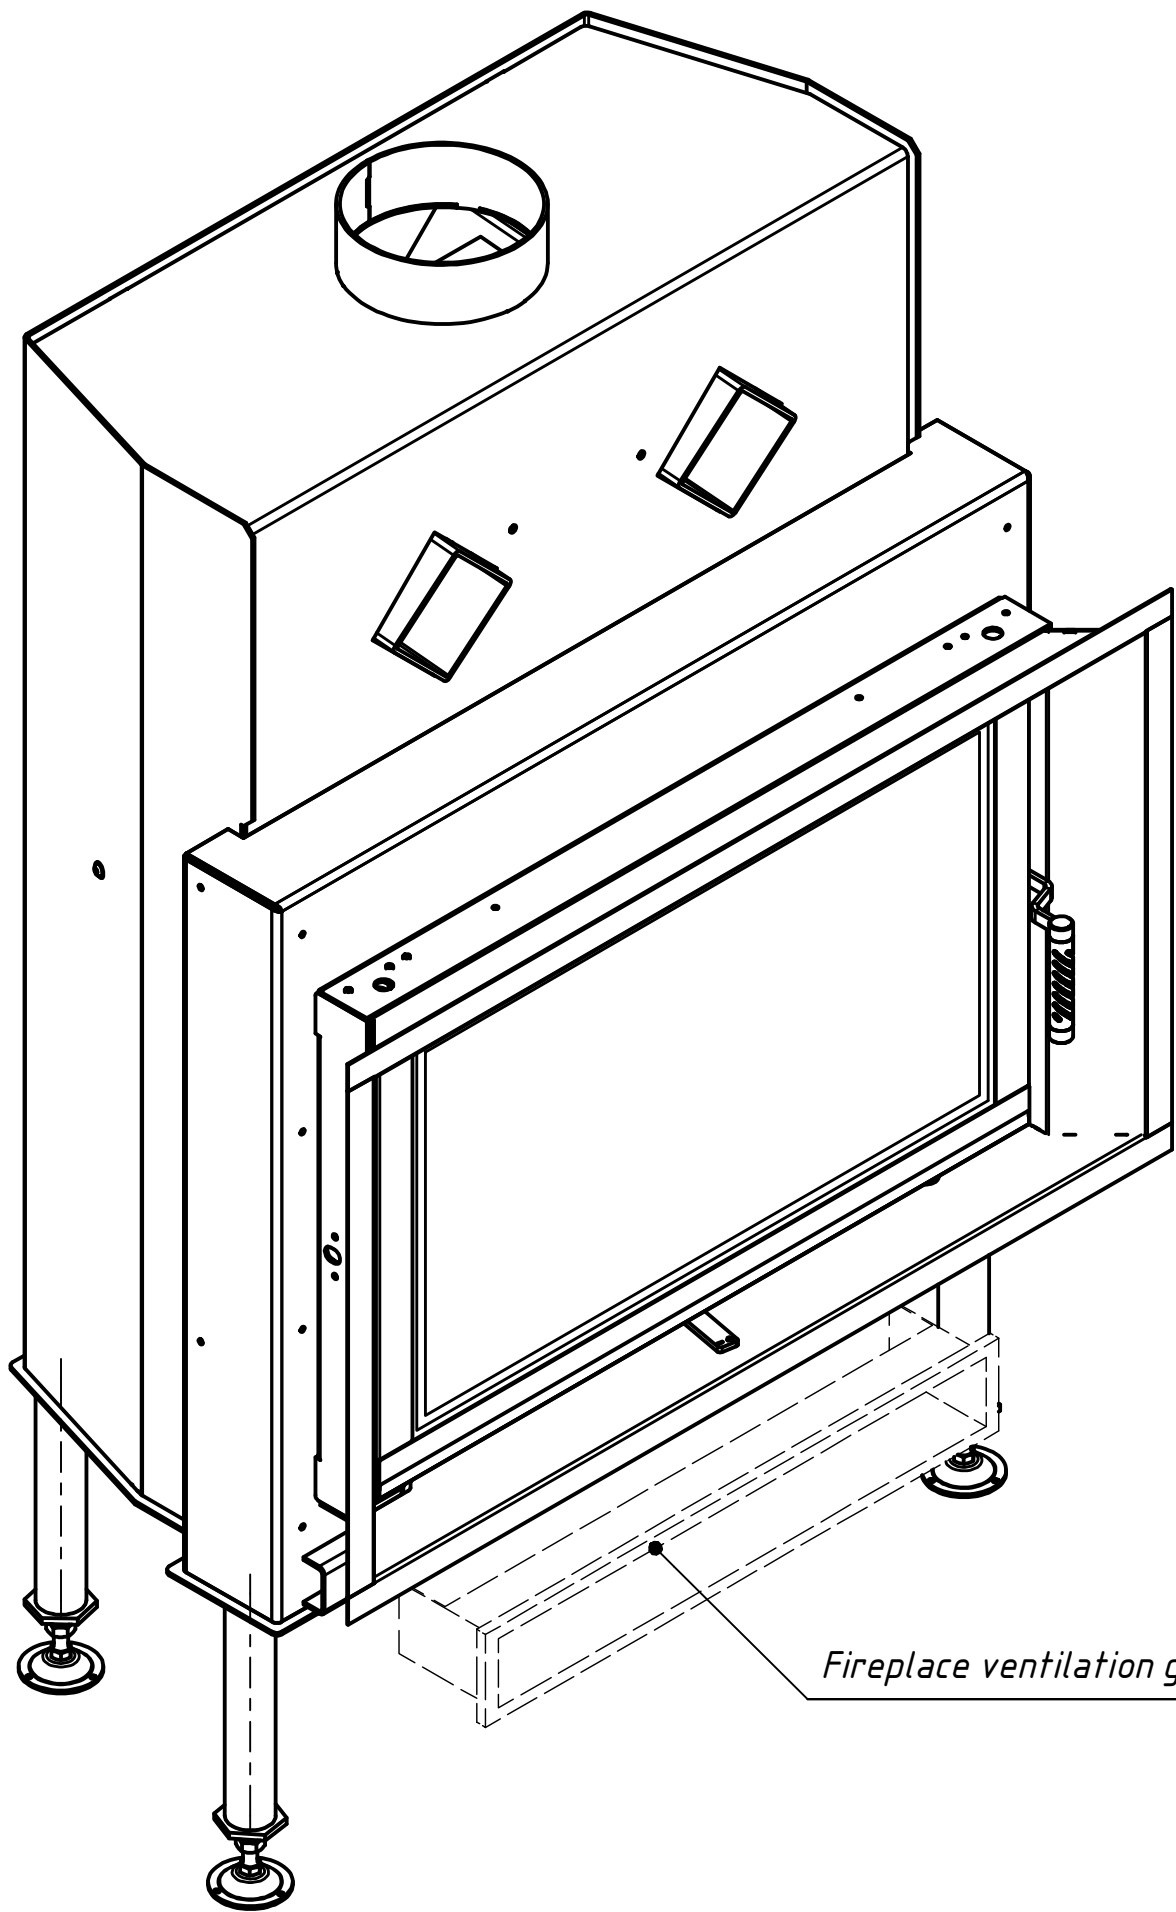

Fireplace ventilation grille

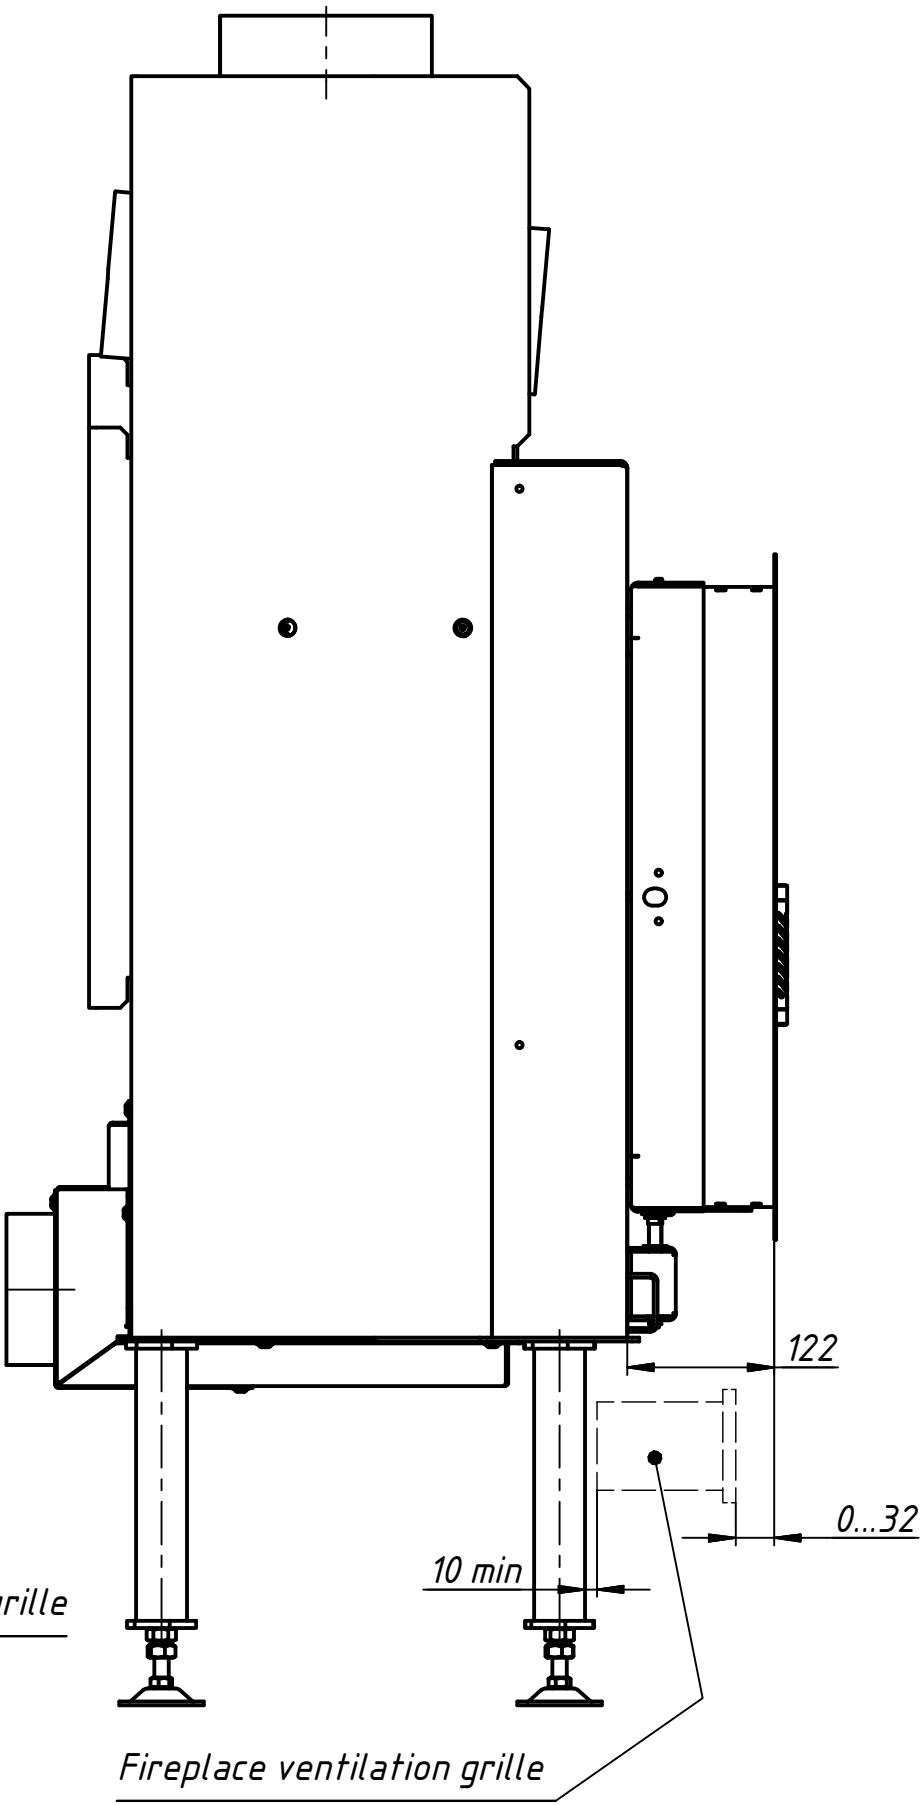


Fireplace ventilation grille




80x52


Accumulation blocks

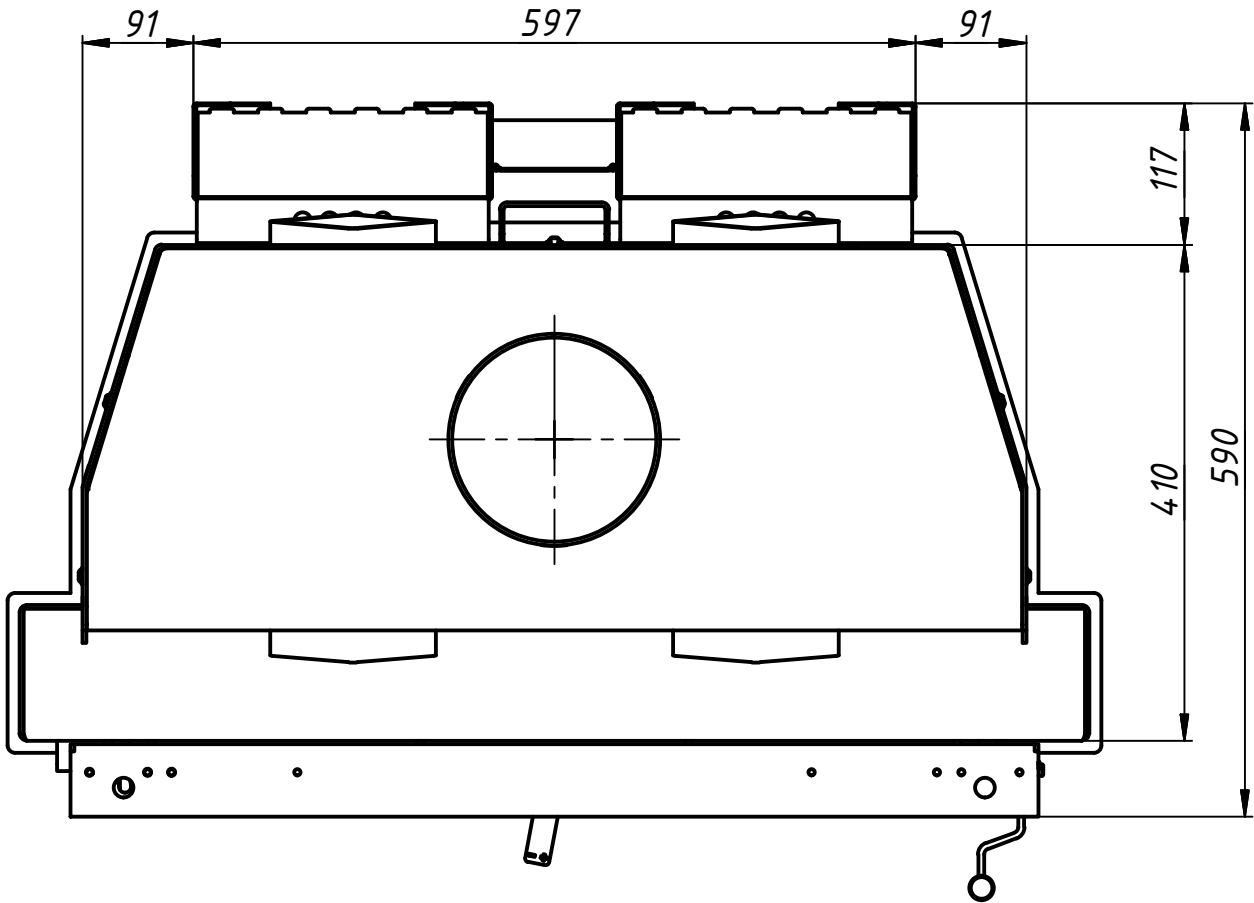

Legs position
(bottom view)

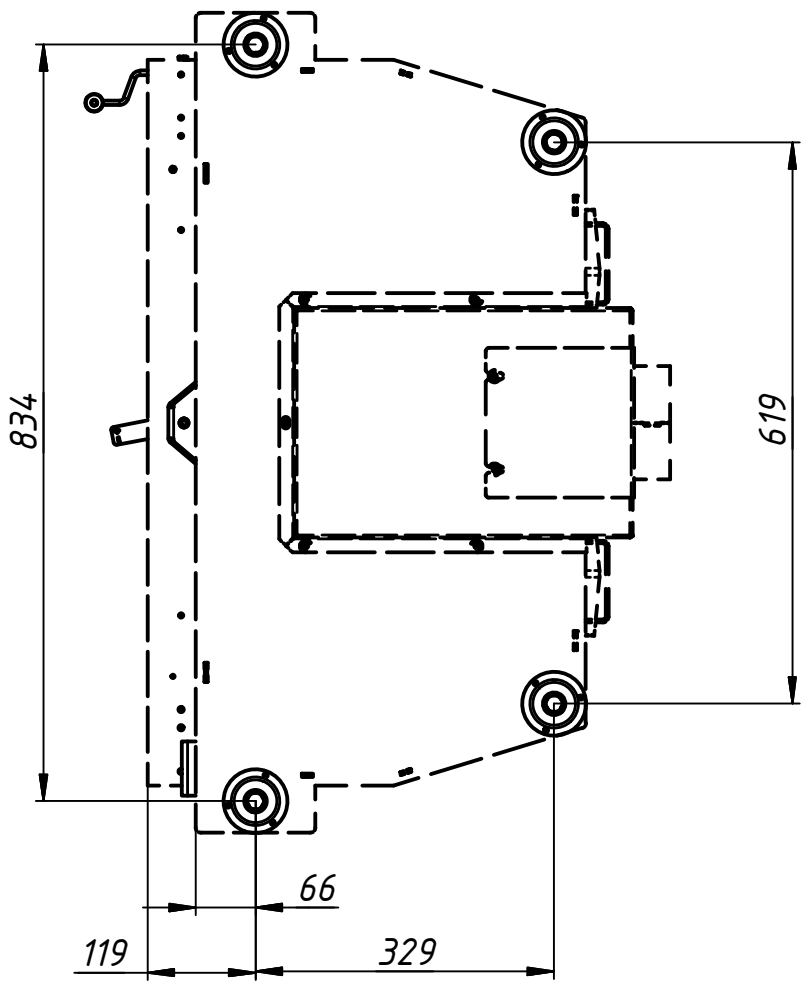

The longer leg

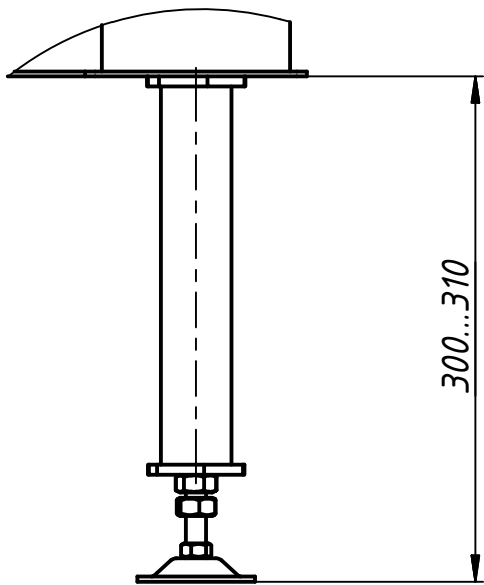

The default leg

