

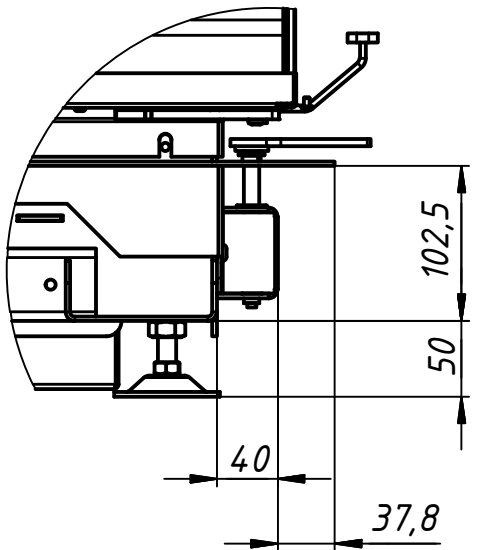
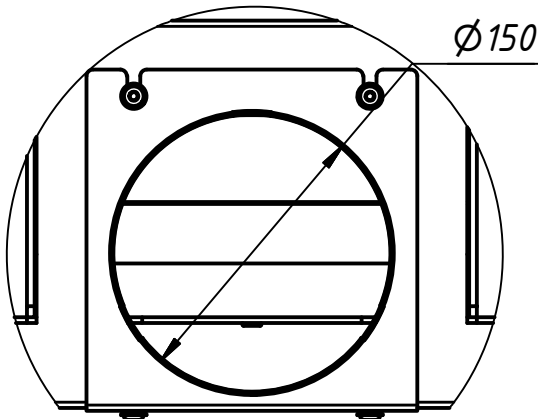
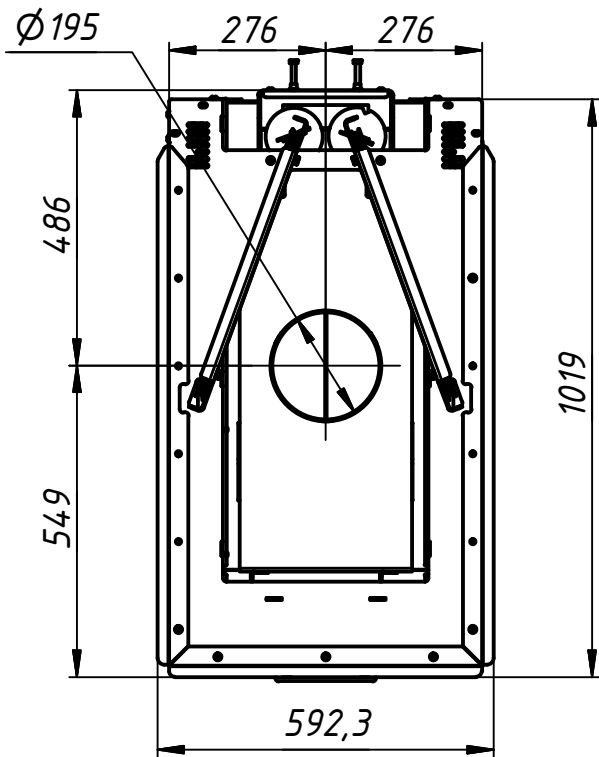
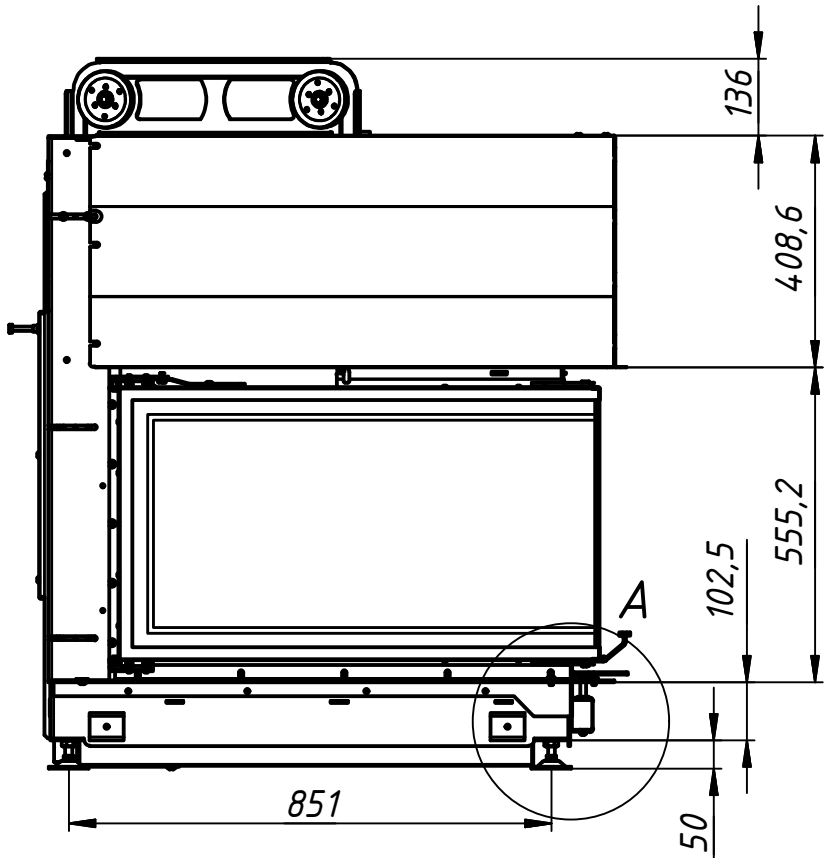
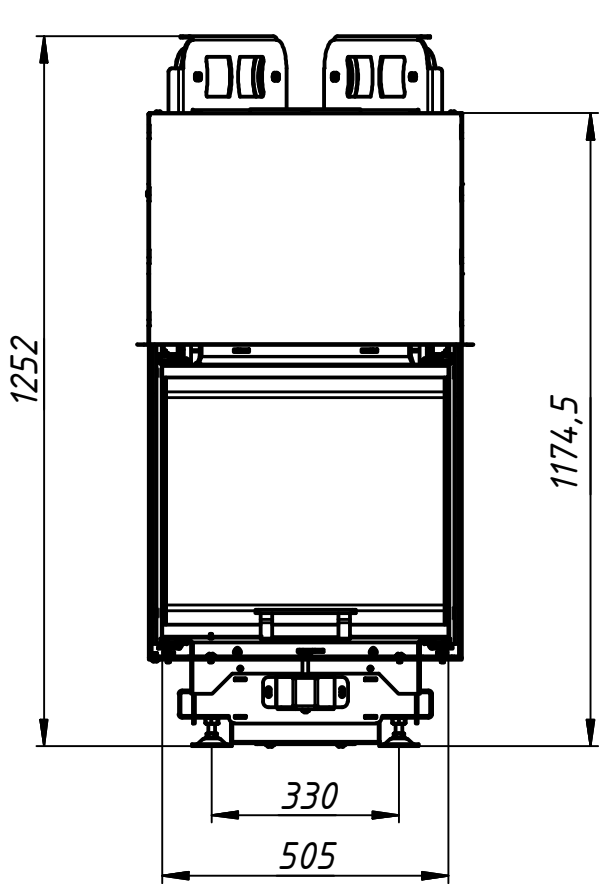




Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	14.5
Wood consumption	kg/h	4.3
Efficiency	%	80
Heat distribution		
door glass (single / double)	%	55 / --
fireplace insert	%	45 / --
water circuit	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection*	mm	150
Minimum radiant area	sq m	8.1
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1600
Minimum outgoing air grating cross-section	sq cm	1900
Log length	cm	30-45
Weight fireplace with ribbed 40mm chamotte & mounting frame	kg	300
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		--
Increase in size with acumulation set from the side / behind	mm	-- / --

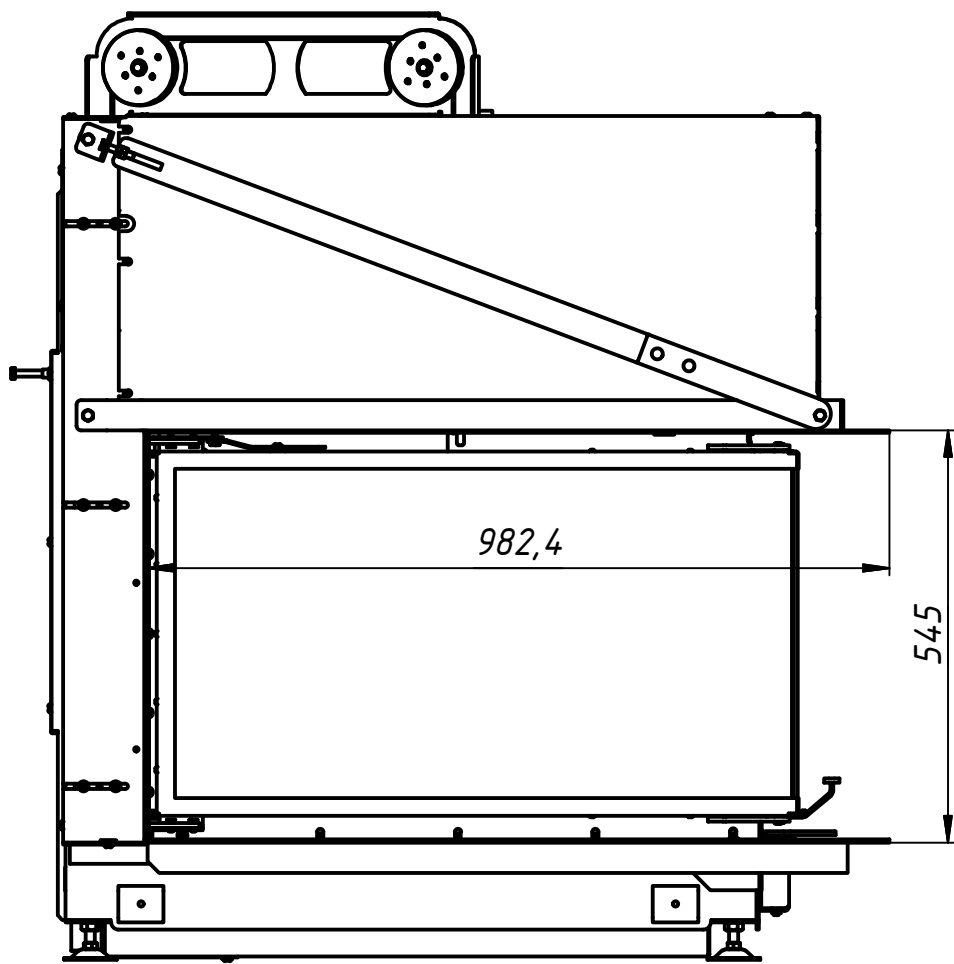


Mounting frame 3mm

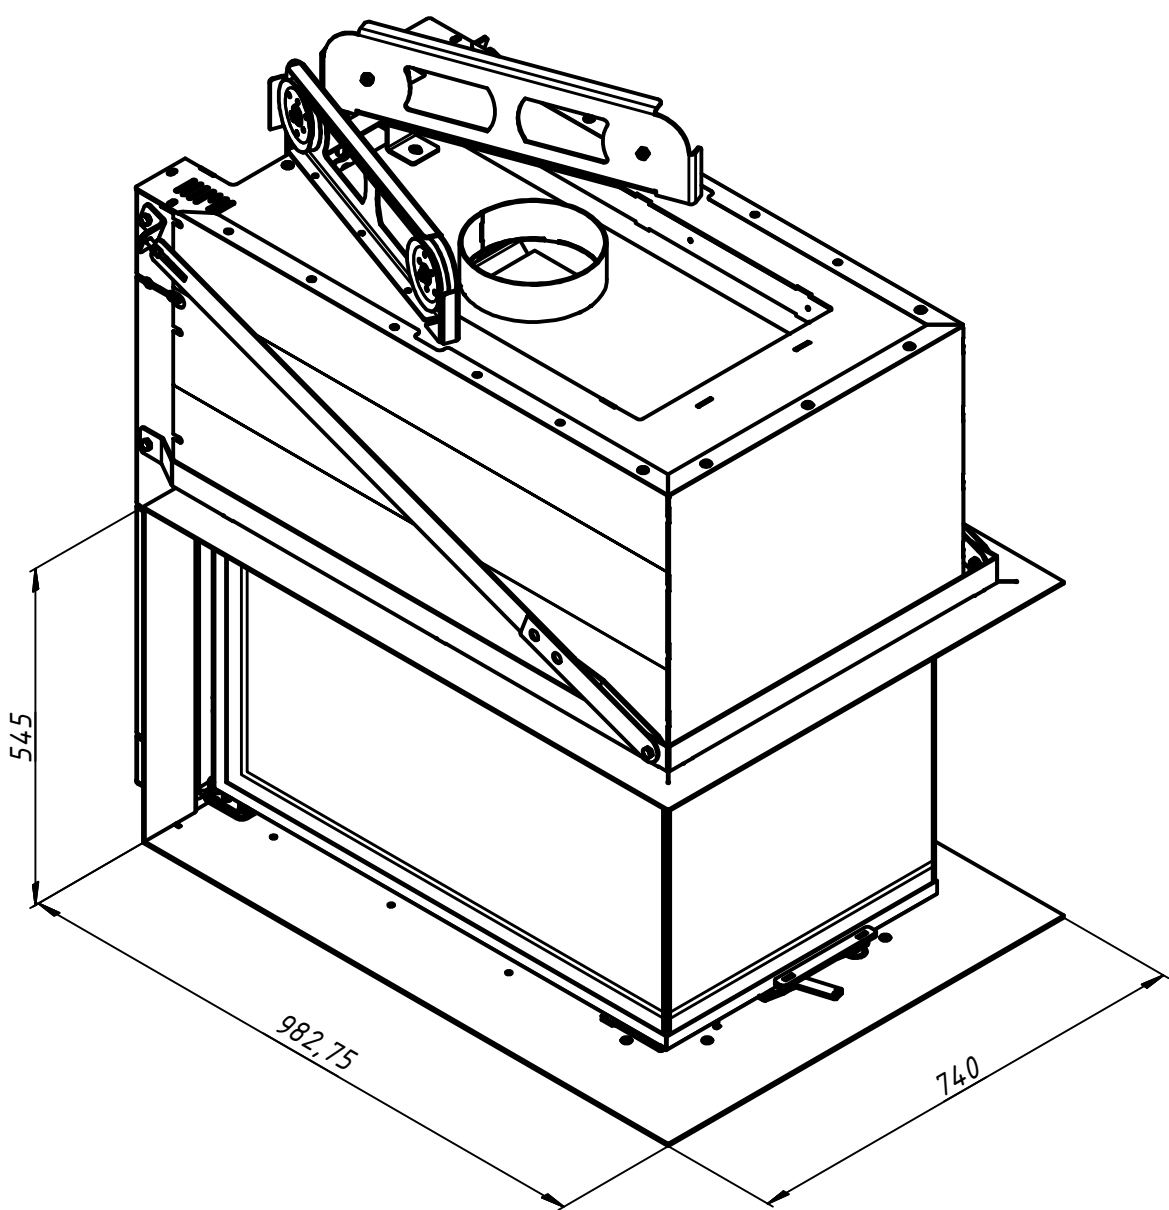


Mounting frame 1.5mm 1x90

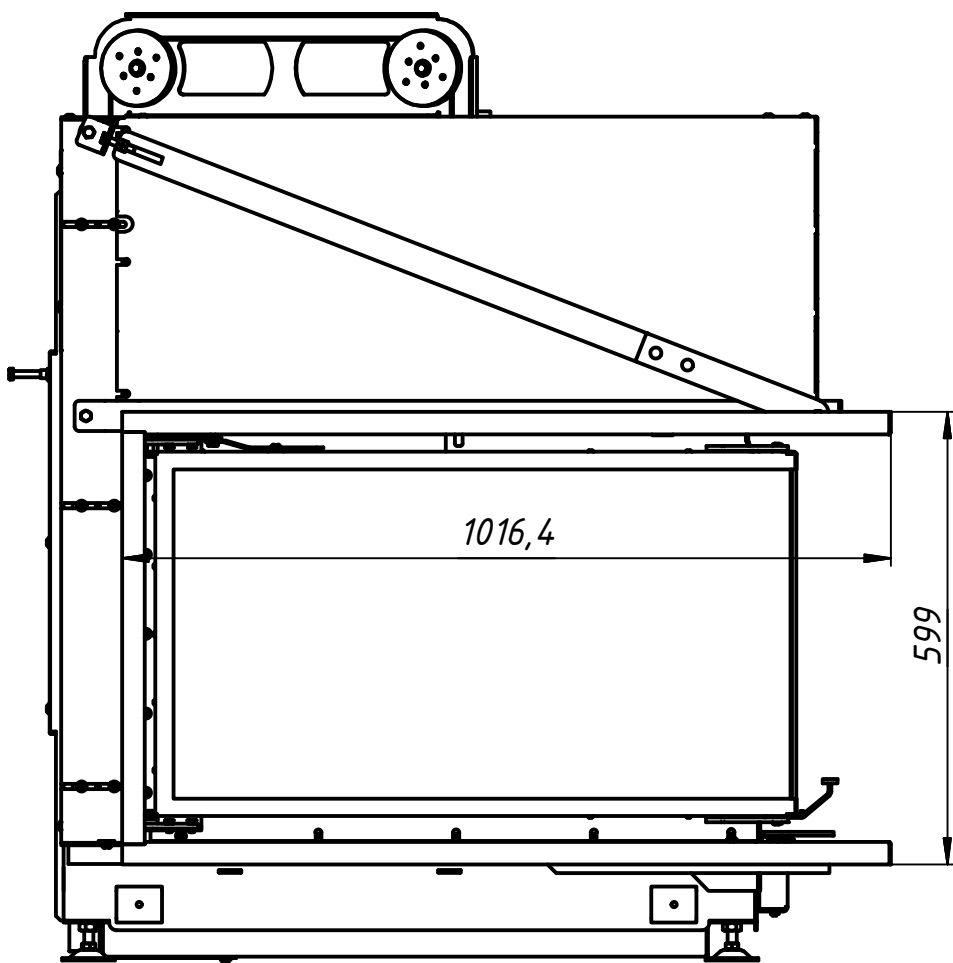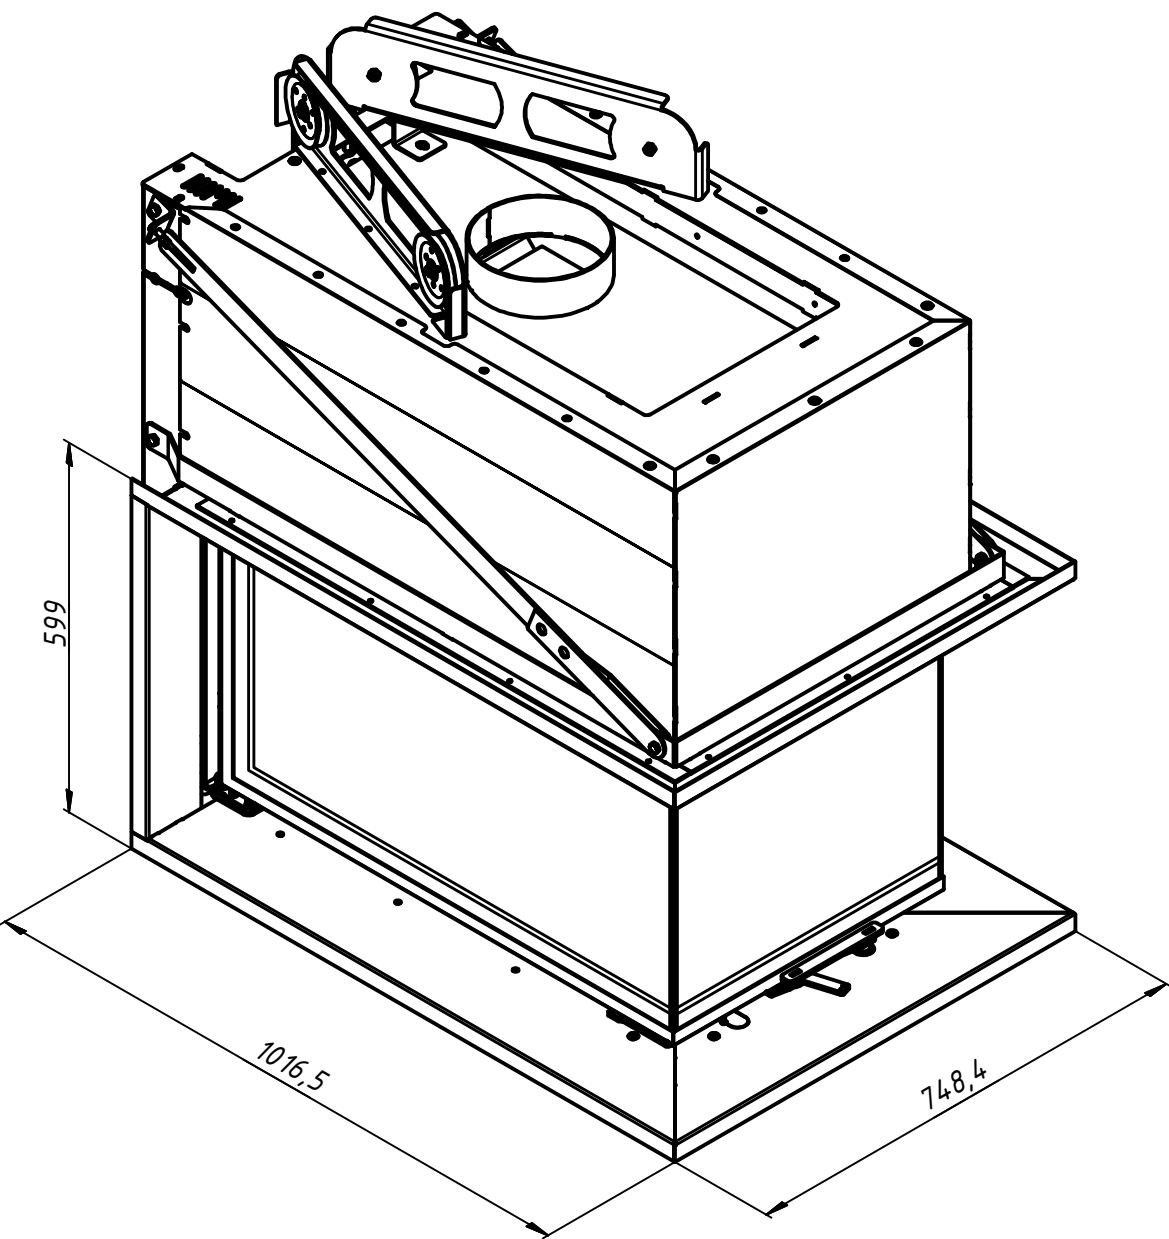

*Legs position
(bottom view)*

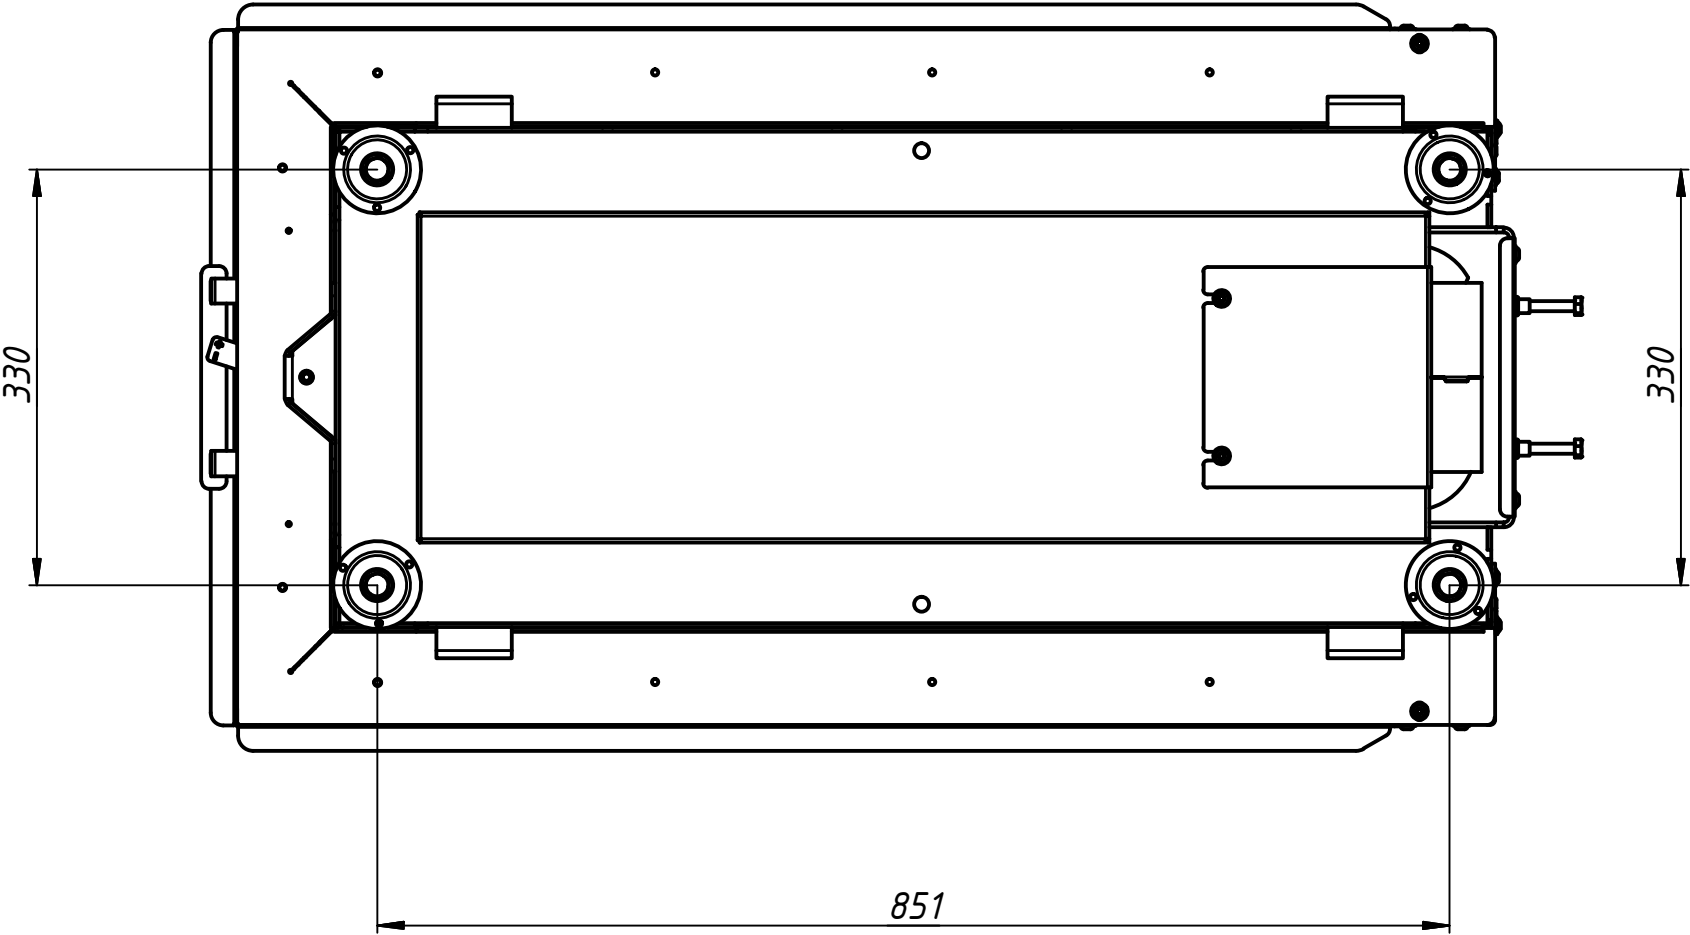

The longer leg

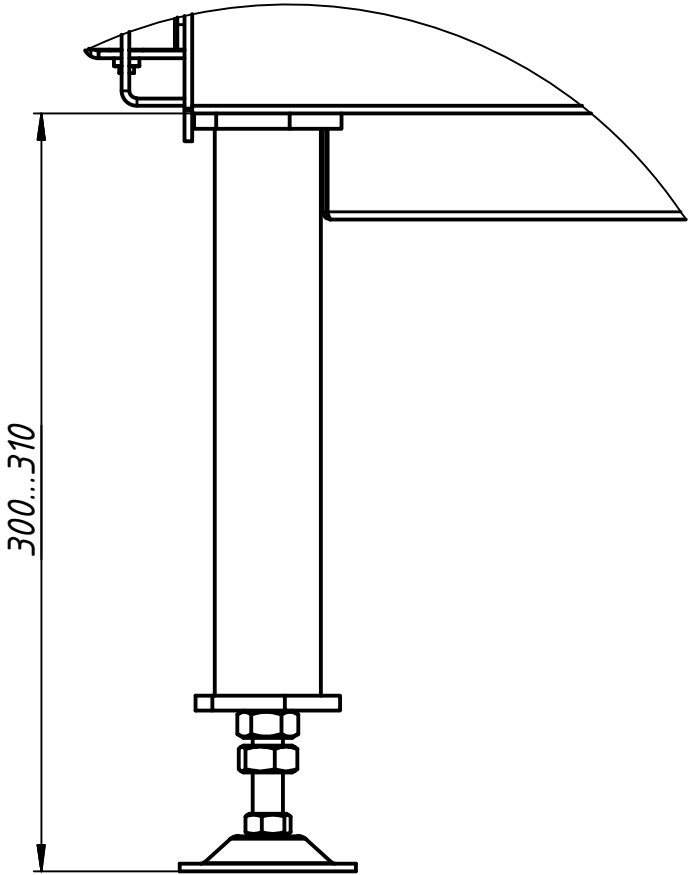

The default leg

