

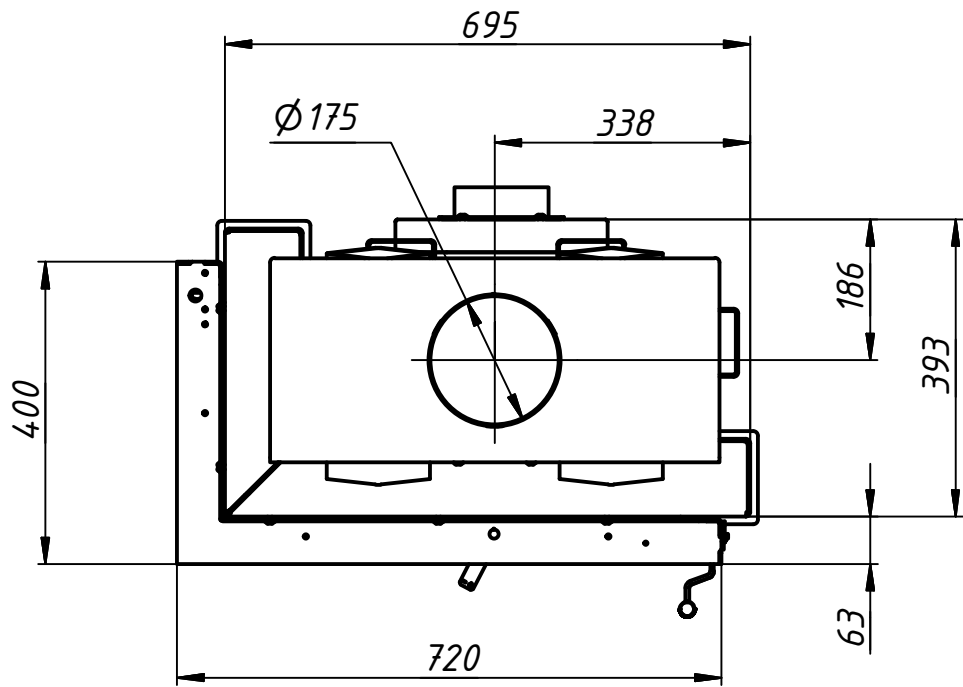
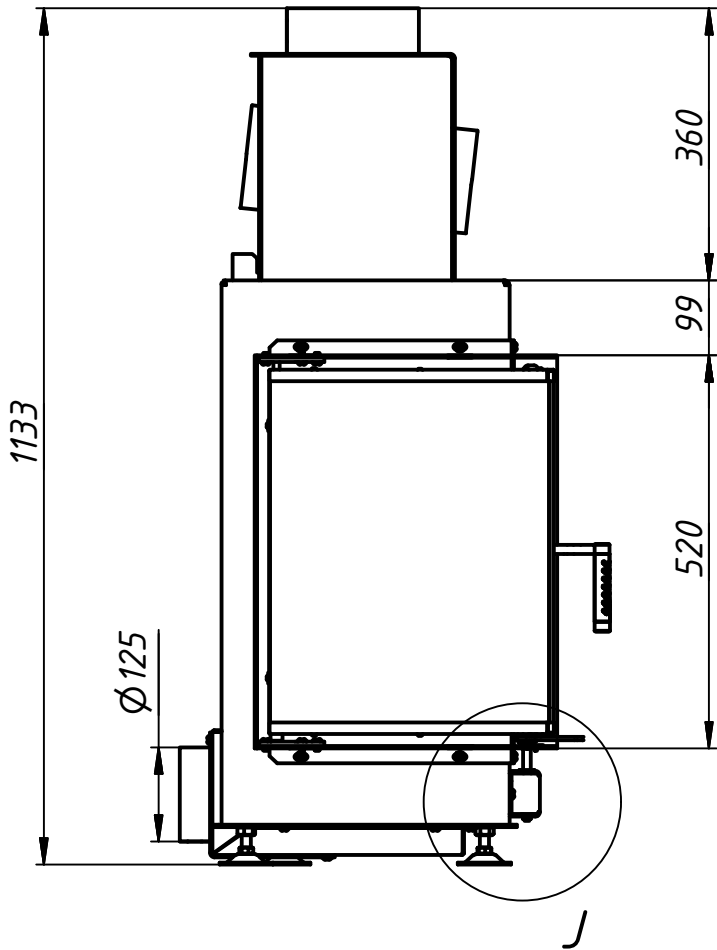


70x40x52

Technical information	Unit	Value
Tested according to	-	-
Rated heat power	kW	12.7
Fire wood volume	kg/h	4
Efficiency	%	>80
Heat distribution		
Glass pane (single / double)	%	45 / --
Insert / fireplace surface	%	55 / --
Boiler	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	180
Combustion air connection diameter	mm	125
Minimal distances of the fireplace to cladding, insulation layer	mm	60
Cross-section of gratings		
Convection air	sq cm	1400
Supply air	sq cm	1650
Recommended log length	cm	30
Fireplace weight with 40mm chamotte plates	kg	173
Fireplace weight with 30mm chamotte plates	kg	167
Quantity of accumulation blocks	pcs	3


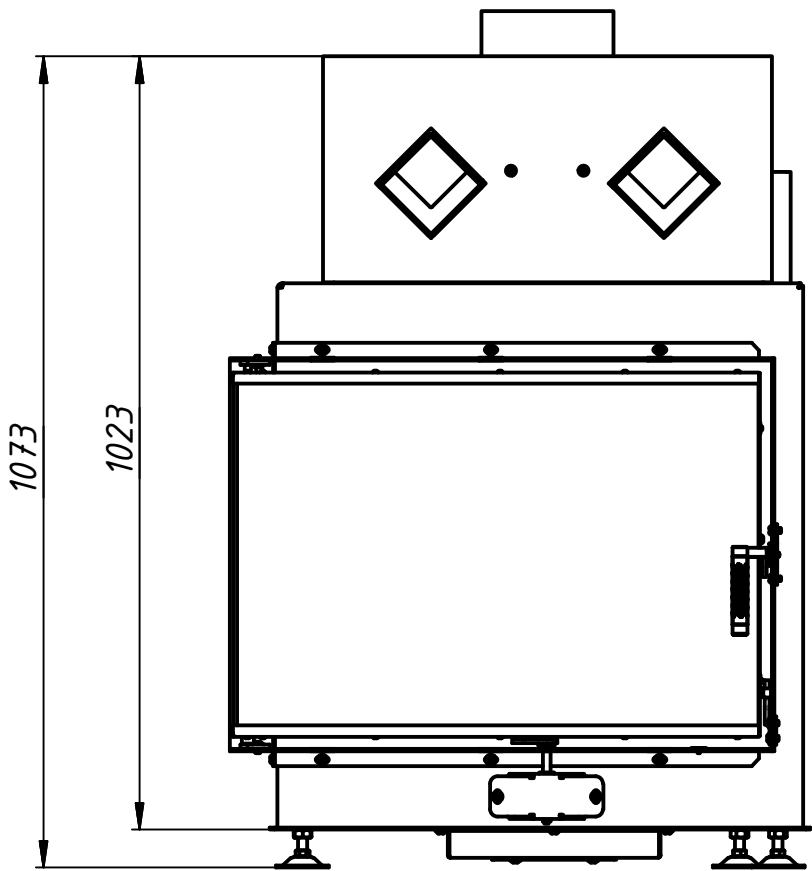


J (1 : 5)


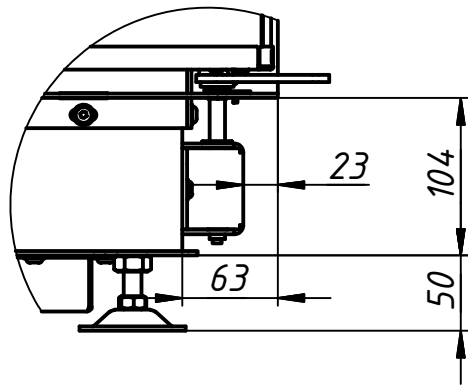


70x40x52

Mounting Frame 1x90 (1.5mm)

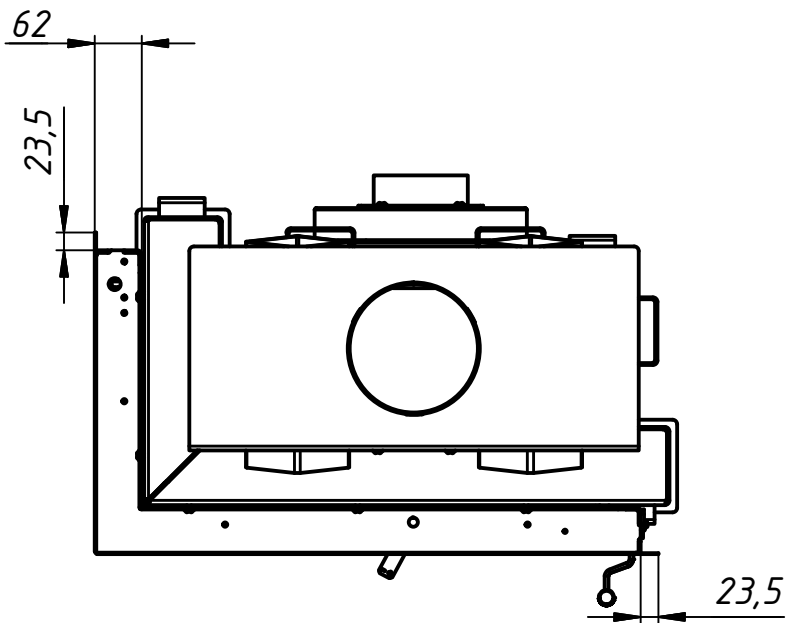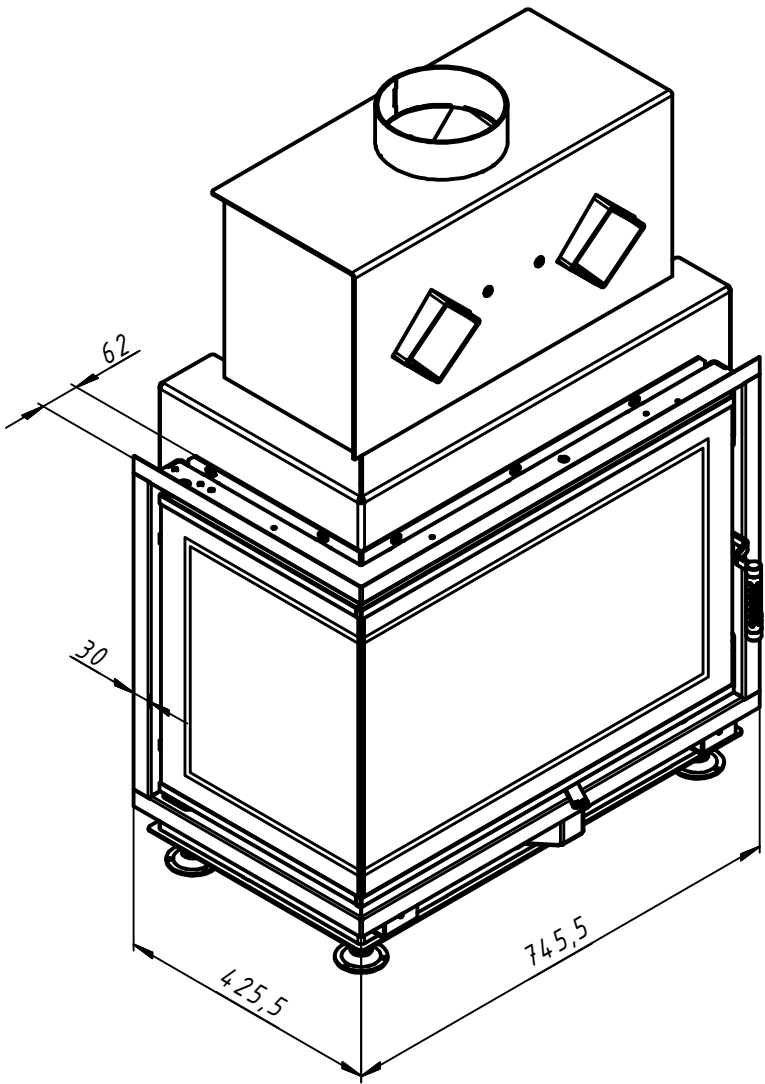


Mounting Frame 2x45 (1.5mm)

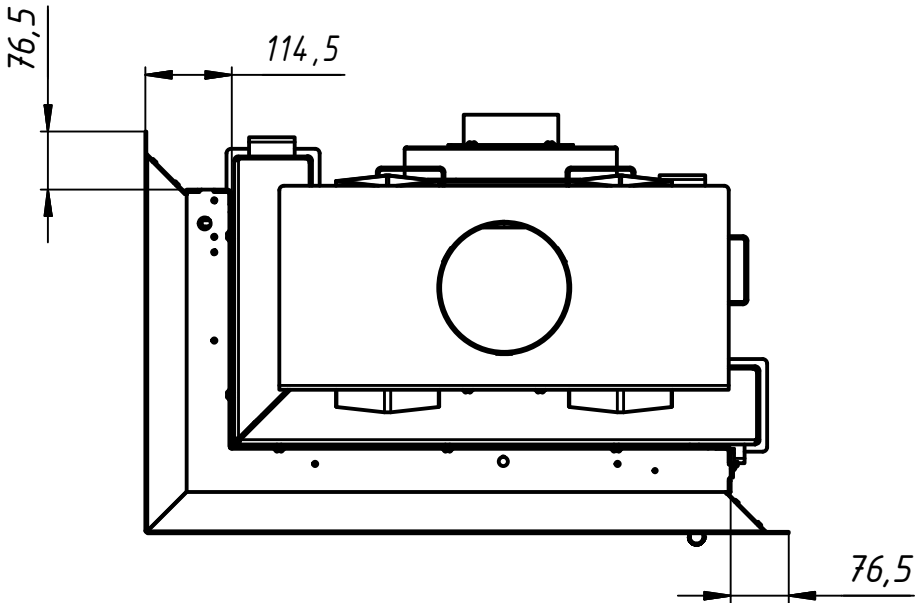
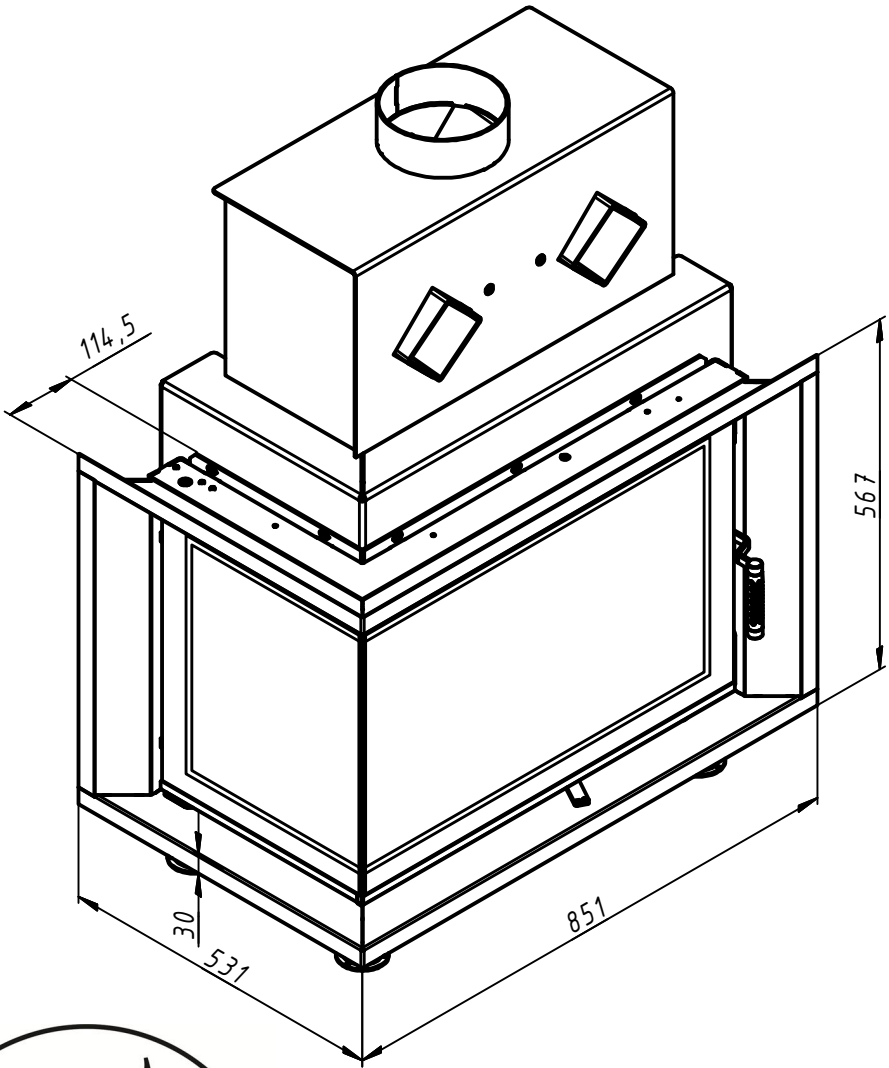


70x40x52


Accumulation blocks

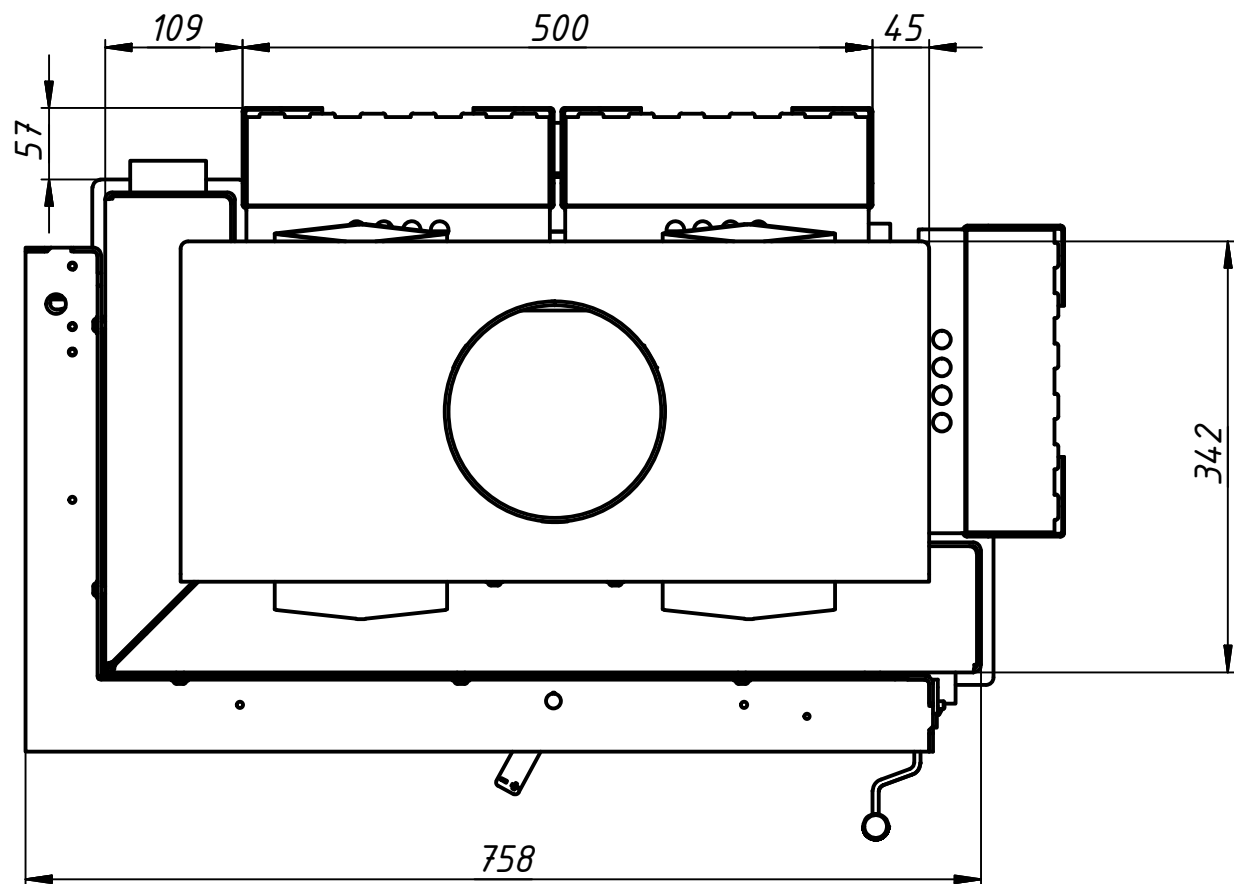

Legs position (bottom view)

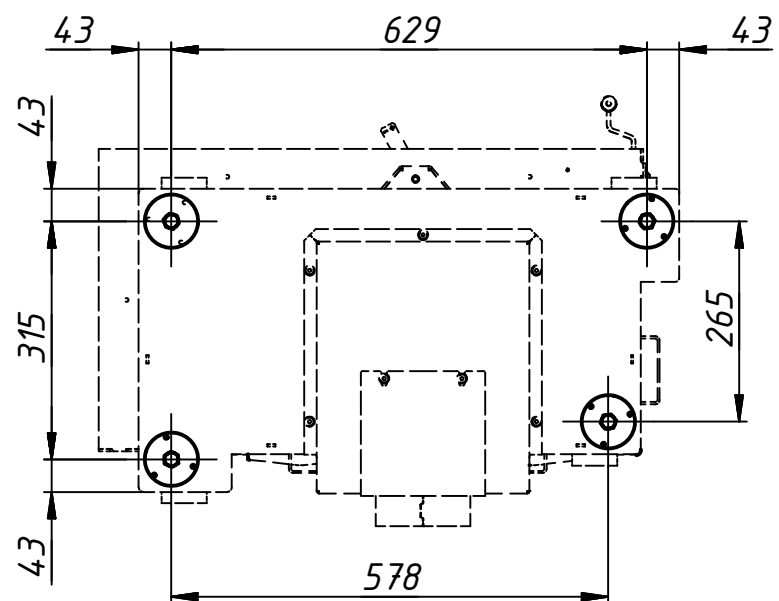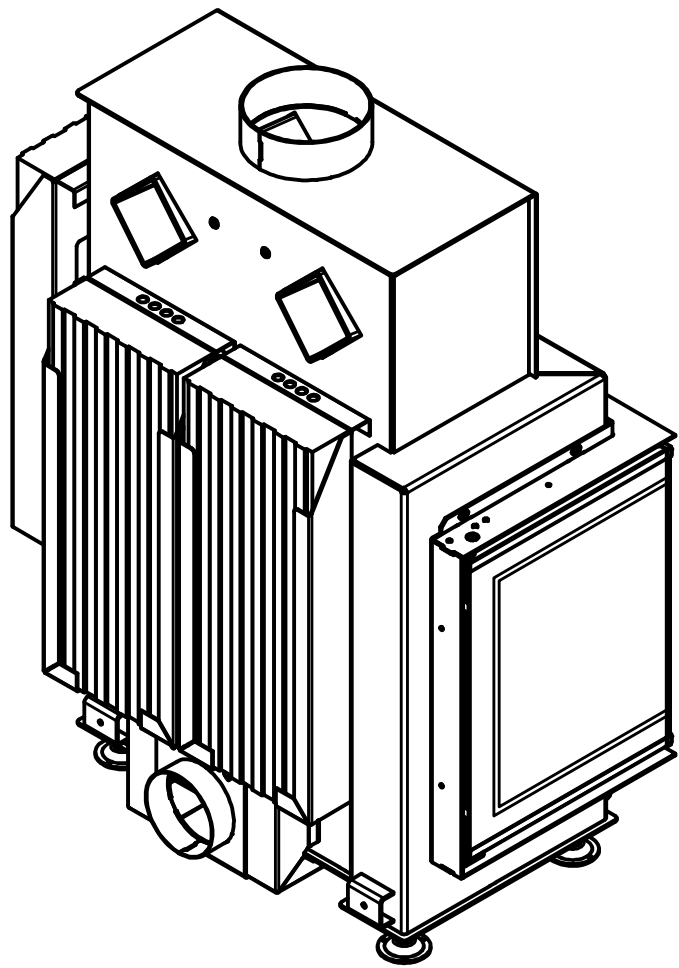

The longer leg

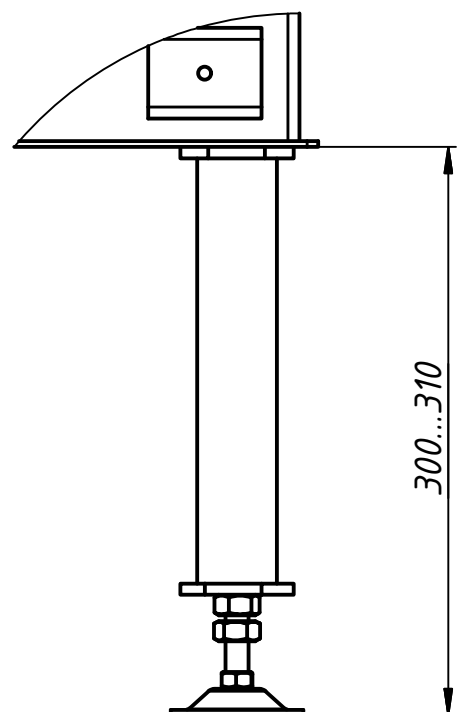

The default leg

