

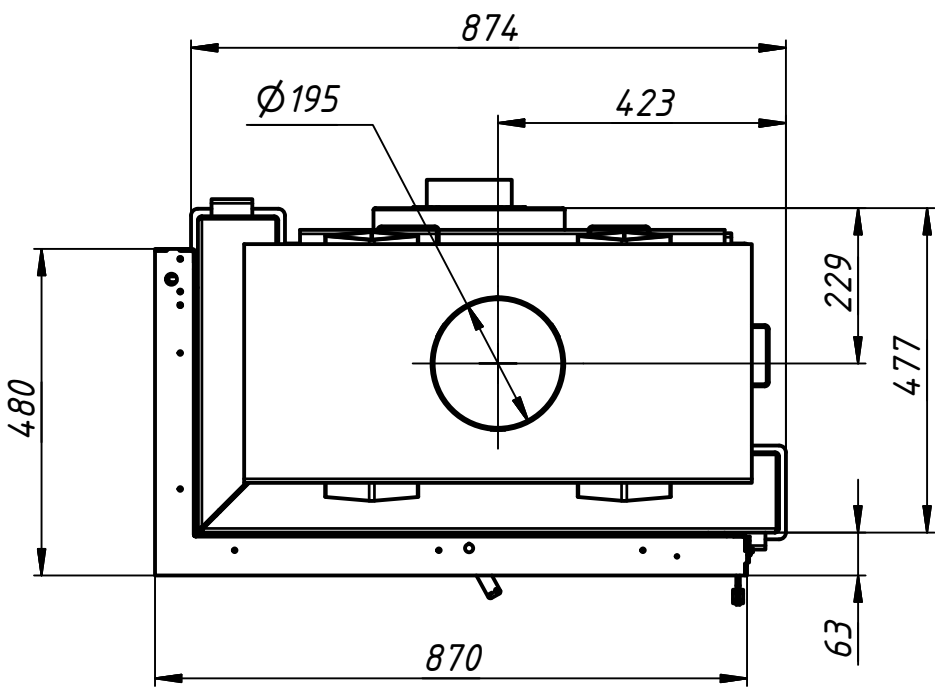
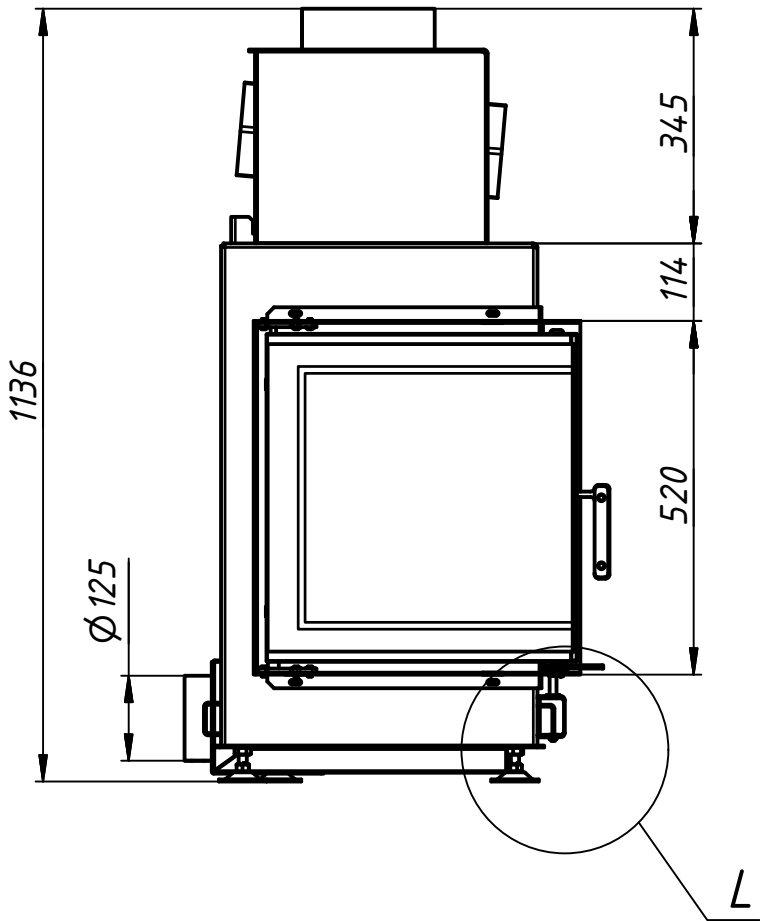


86x48x52

Technical information	Unit	Value
Tested according to	-	-
Rated heat power	kW	14.5
Fire wood volume	kg/h	4.7
Efficiency	%	>80
Heat distribution		
Glass pane (single / double)	%	30 / 20
Insert / fireplace surface	%	70 / 80
Boiler	%	--/ --
Required chimney pressure	Pa	12
Chimney diameter	mm	200
Combustion air connection diameter	mm	125
Minimal distances of the fireplace to cladding, insulation layer	mm	60
Cross-section of gratings		
Convection air	sq cm	1700
Supply air	sq cm	2000
Recommended log length	cm	30-40
Fireplace weight with 40mm chamotte plates	kg	200
Fireplace weight with 30mm chamotte plates	kg	193
Quantity of accumulation blocks	pcs	3


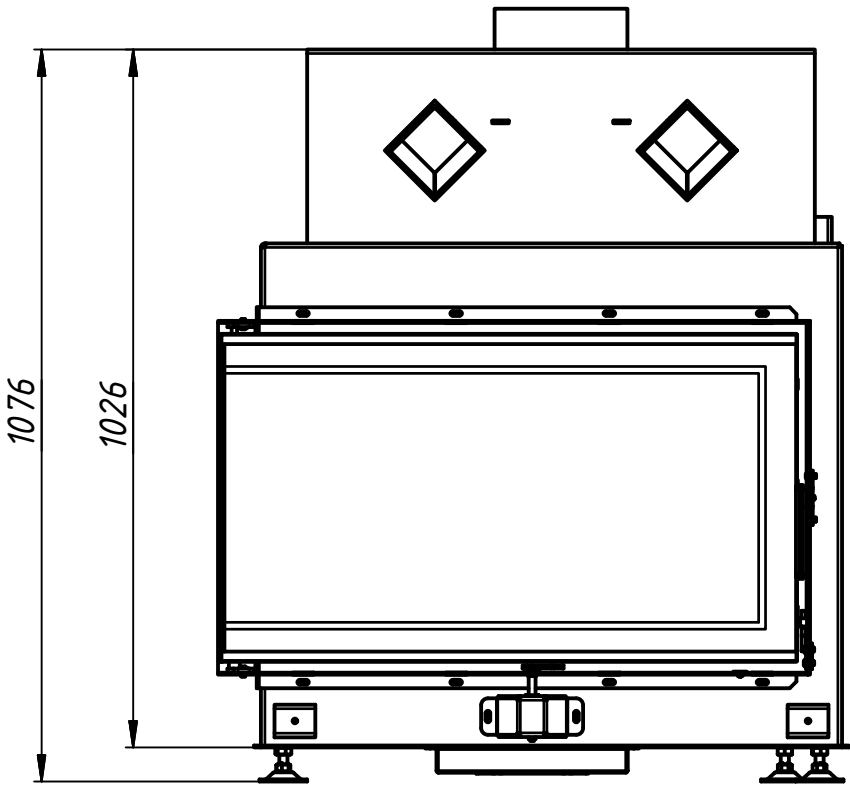


L (1 : 4)


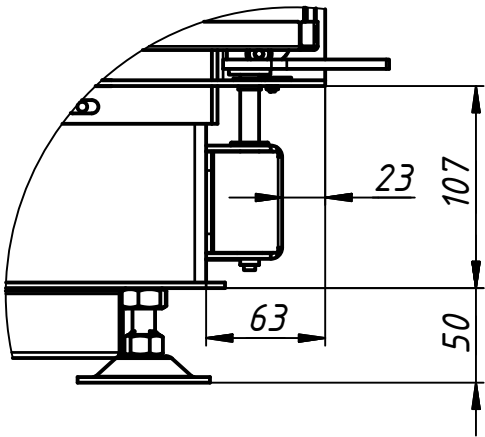


86x48x52

Mounting frame 1x90 (1.5mm)

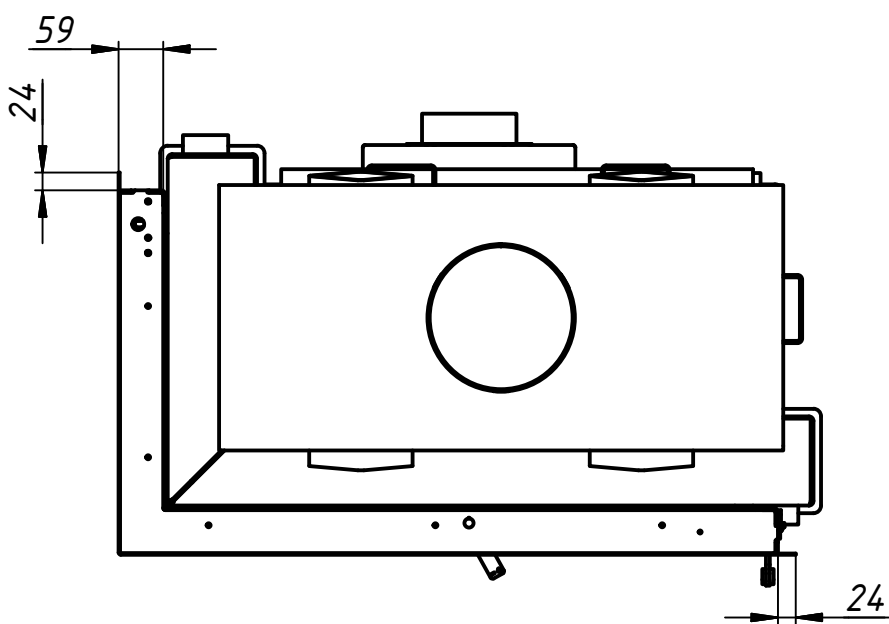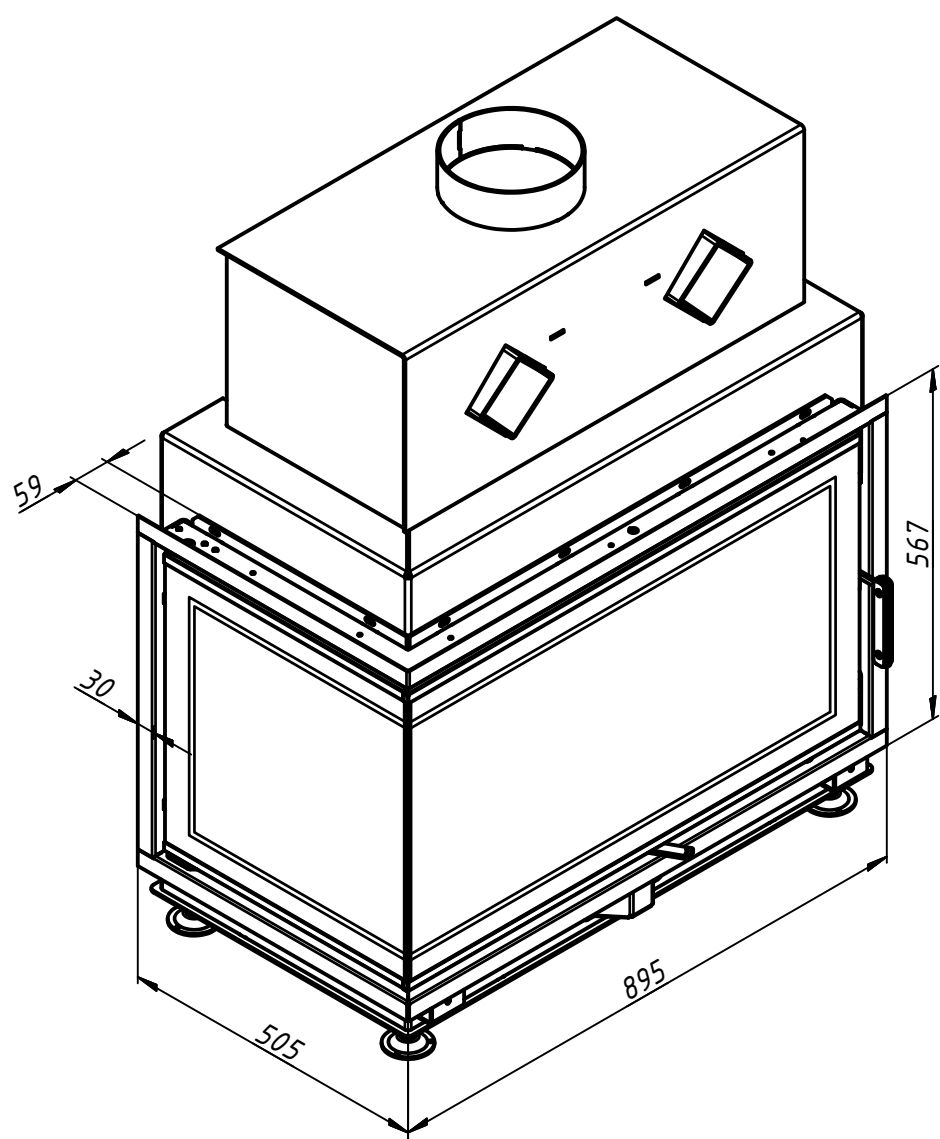


Mounting frame 2x45 (1.5mm)

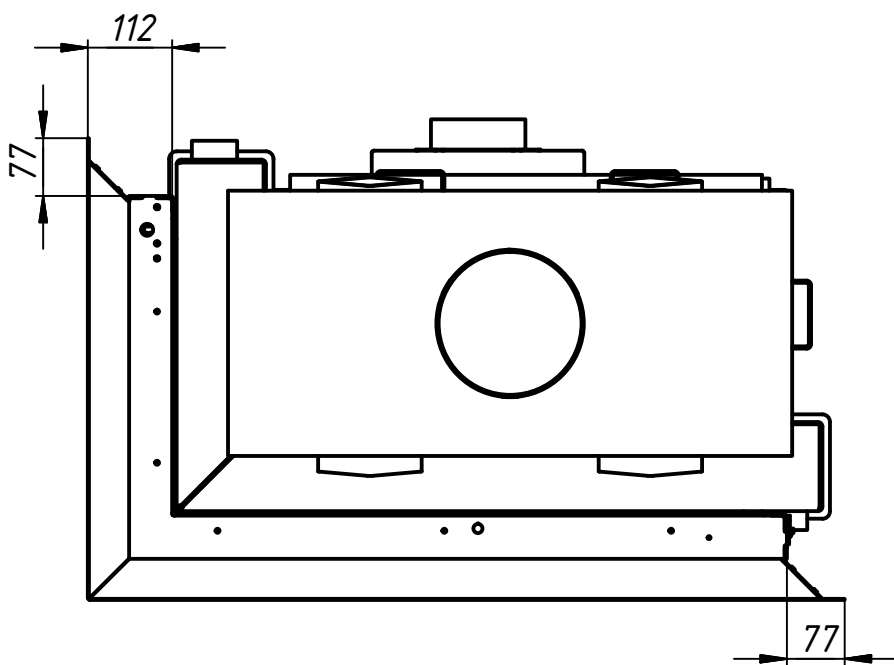
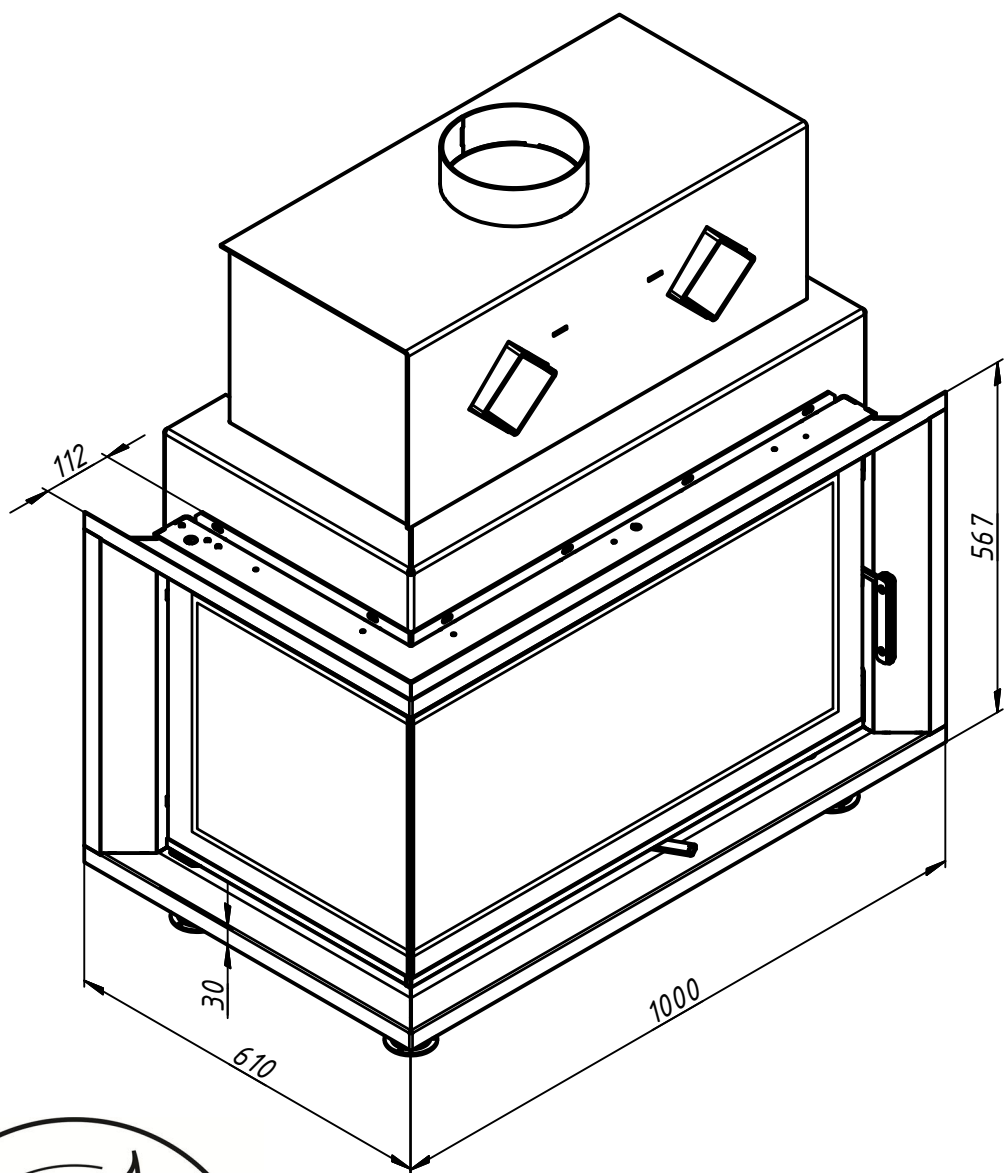


86x48x52


Accumulation blocks

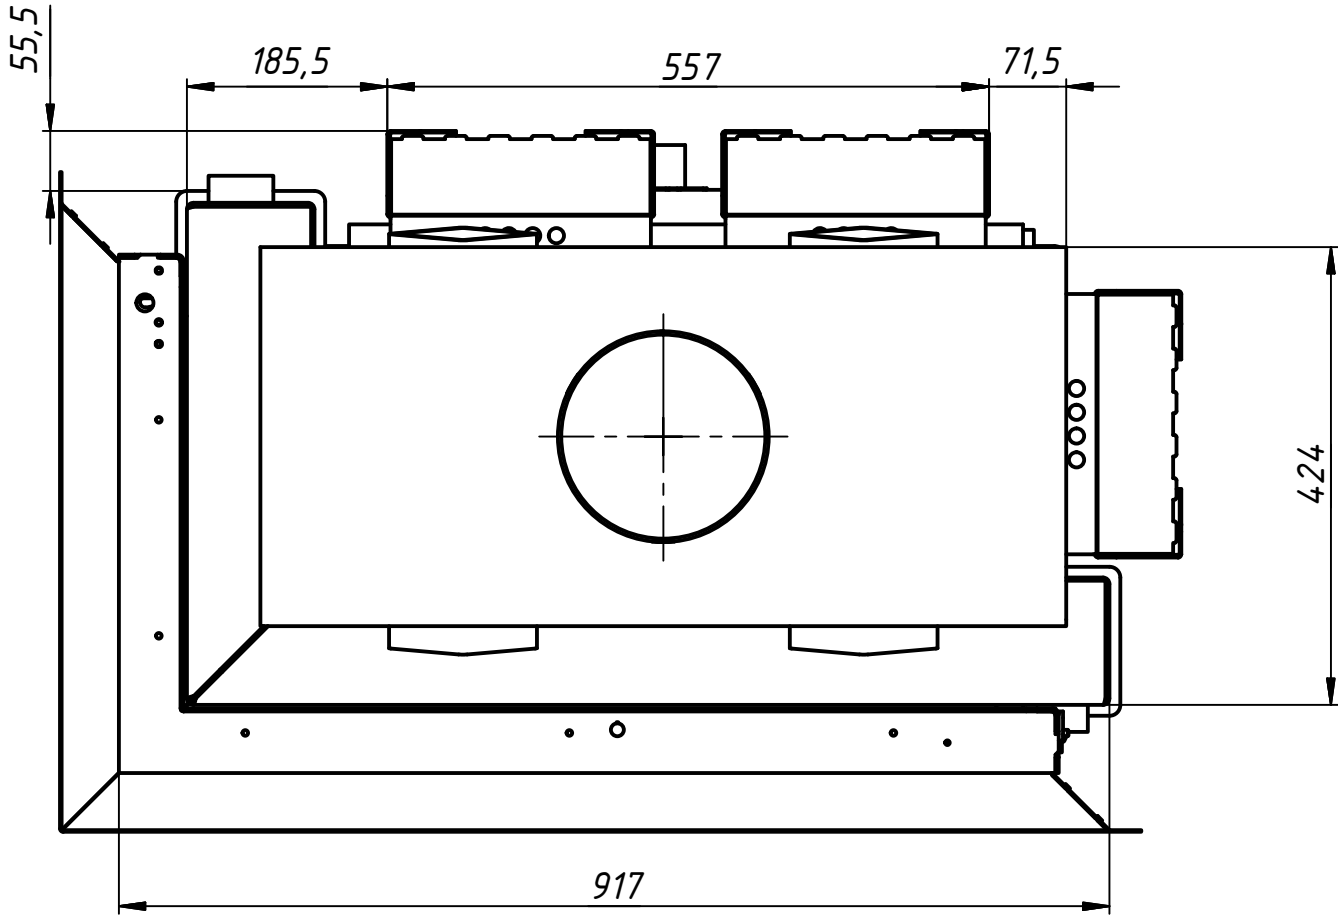

Legs position
(bottom view)

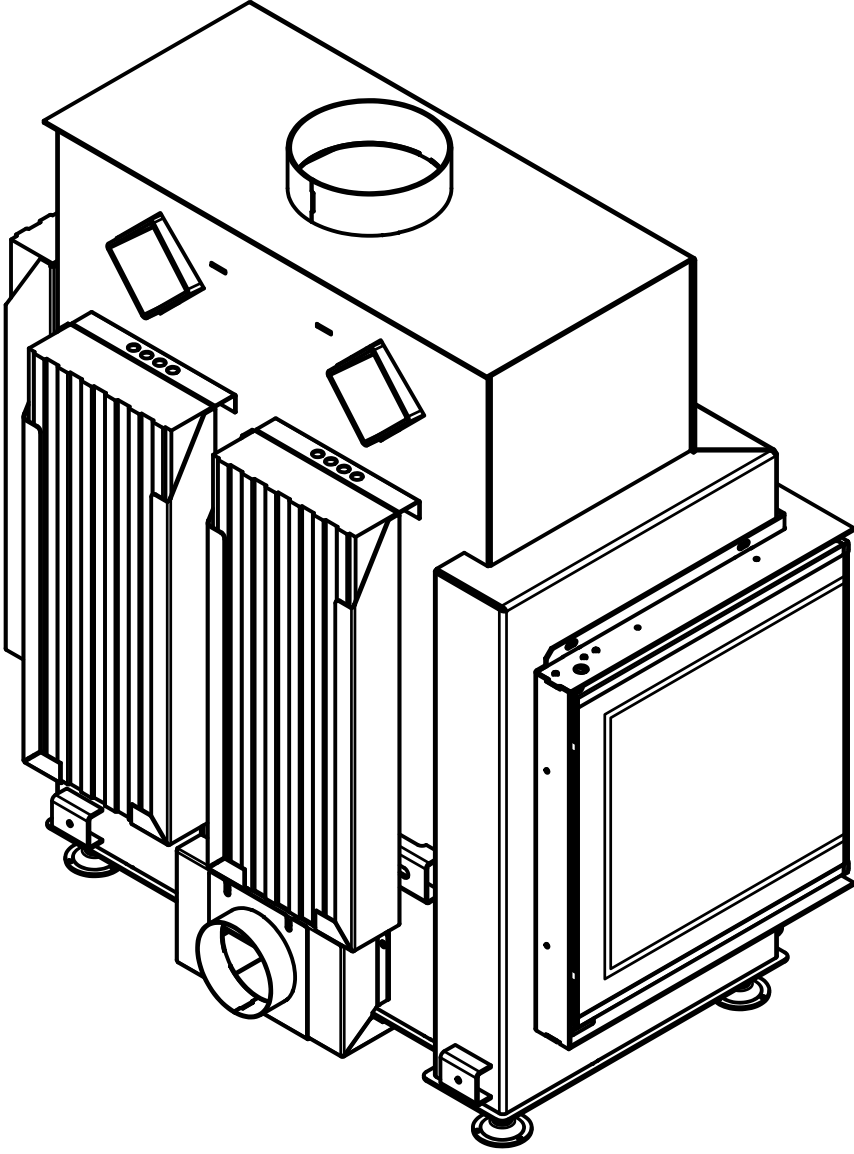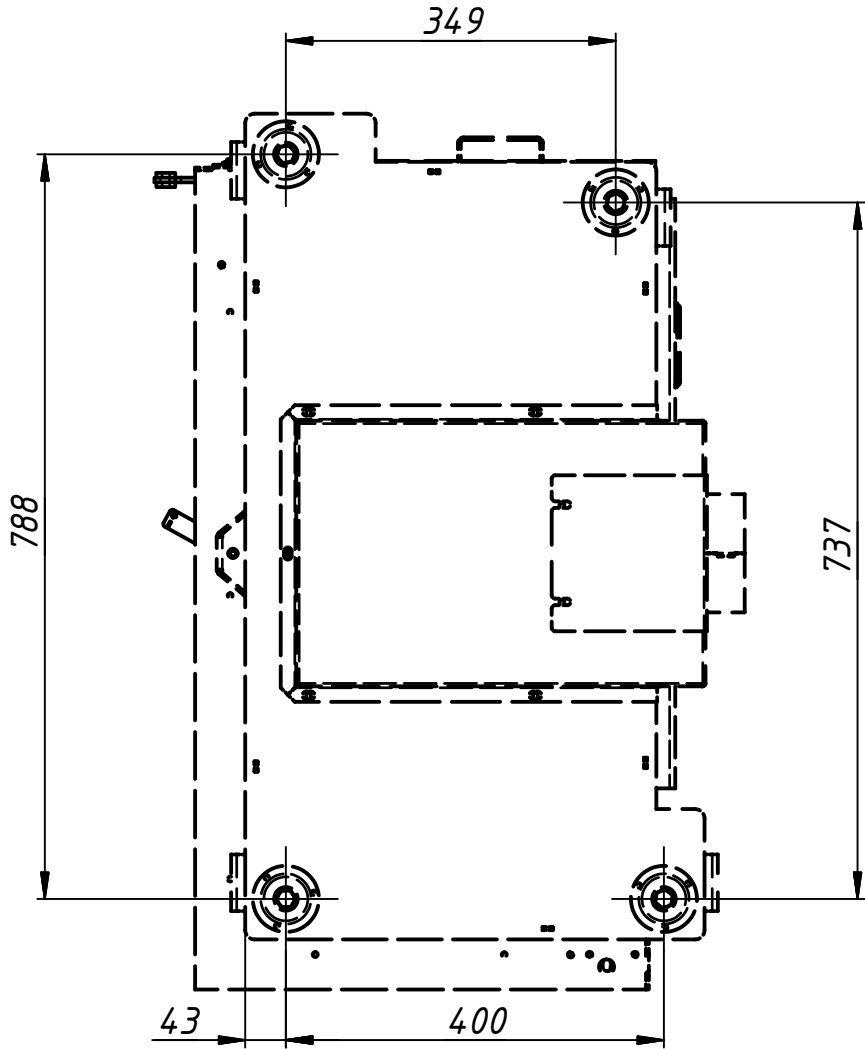

The longer leg

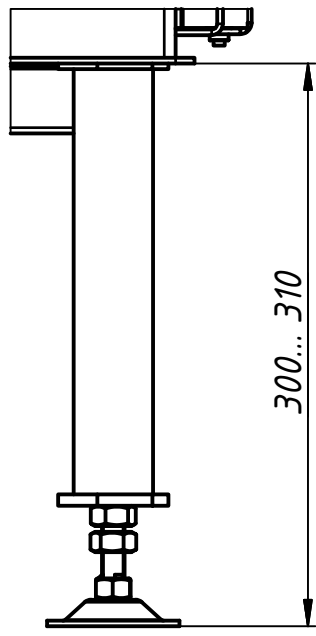

The default leg

