
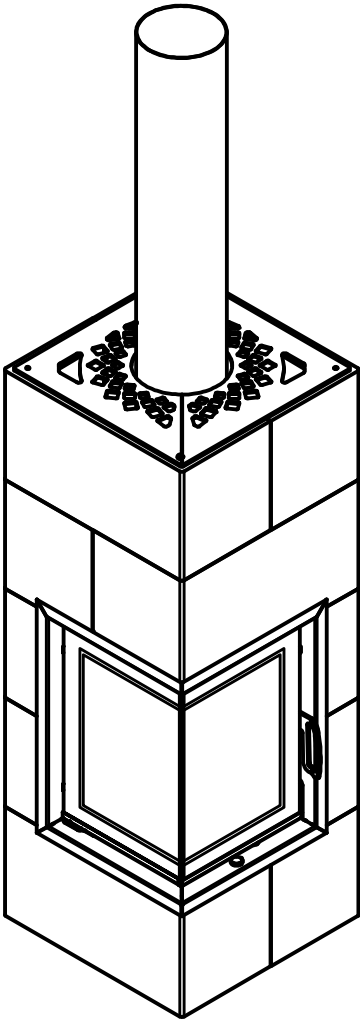


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	7
Wood consumption	kg/h	2.1
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	45 / --
fireplace insert	%	55 / --
water circuit	%	-- / --
Required chimney pressure	Pa	11
Chimney diameter	mm	150
Combustion air connection*	mm	100-125
Minimum distance from facing to the non-combustible surfaces	mm	50
Log length	cm	20-25
Weight of the fireplace insert with ribbed 40mm chamotte	kg	89
Weight of the fireplace insert facing kit	kg	275

*Minimum D100mm is allowable.

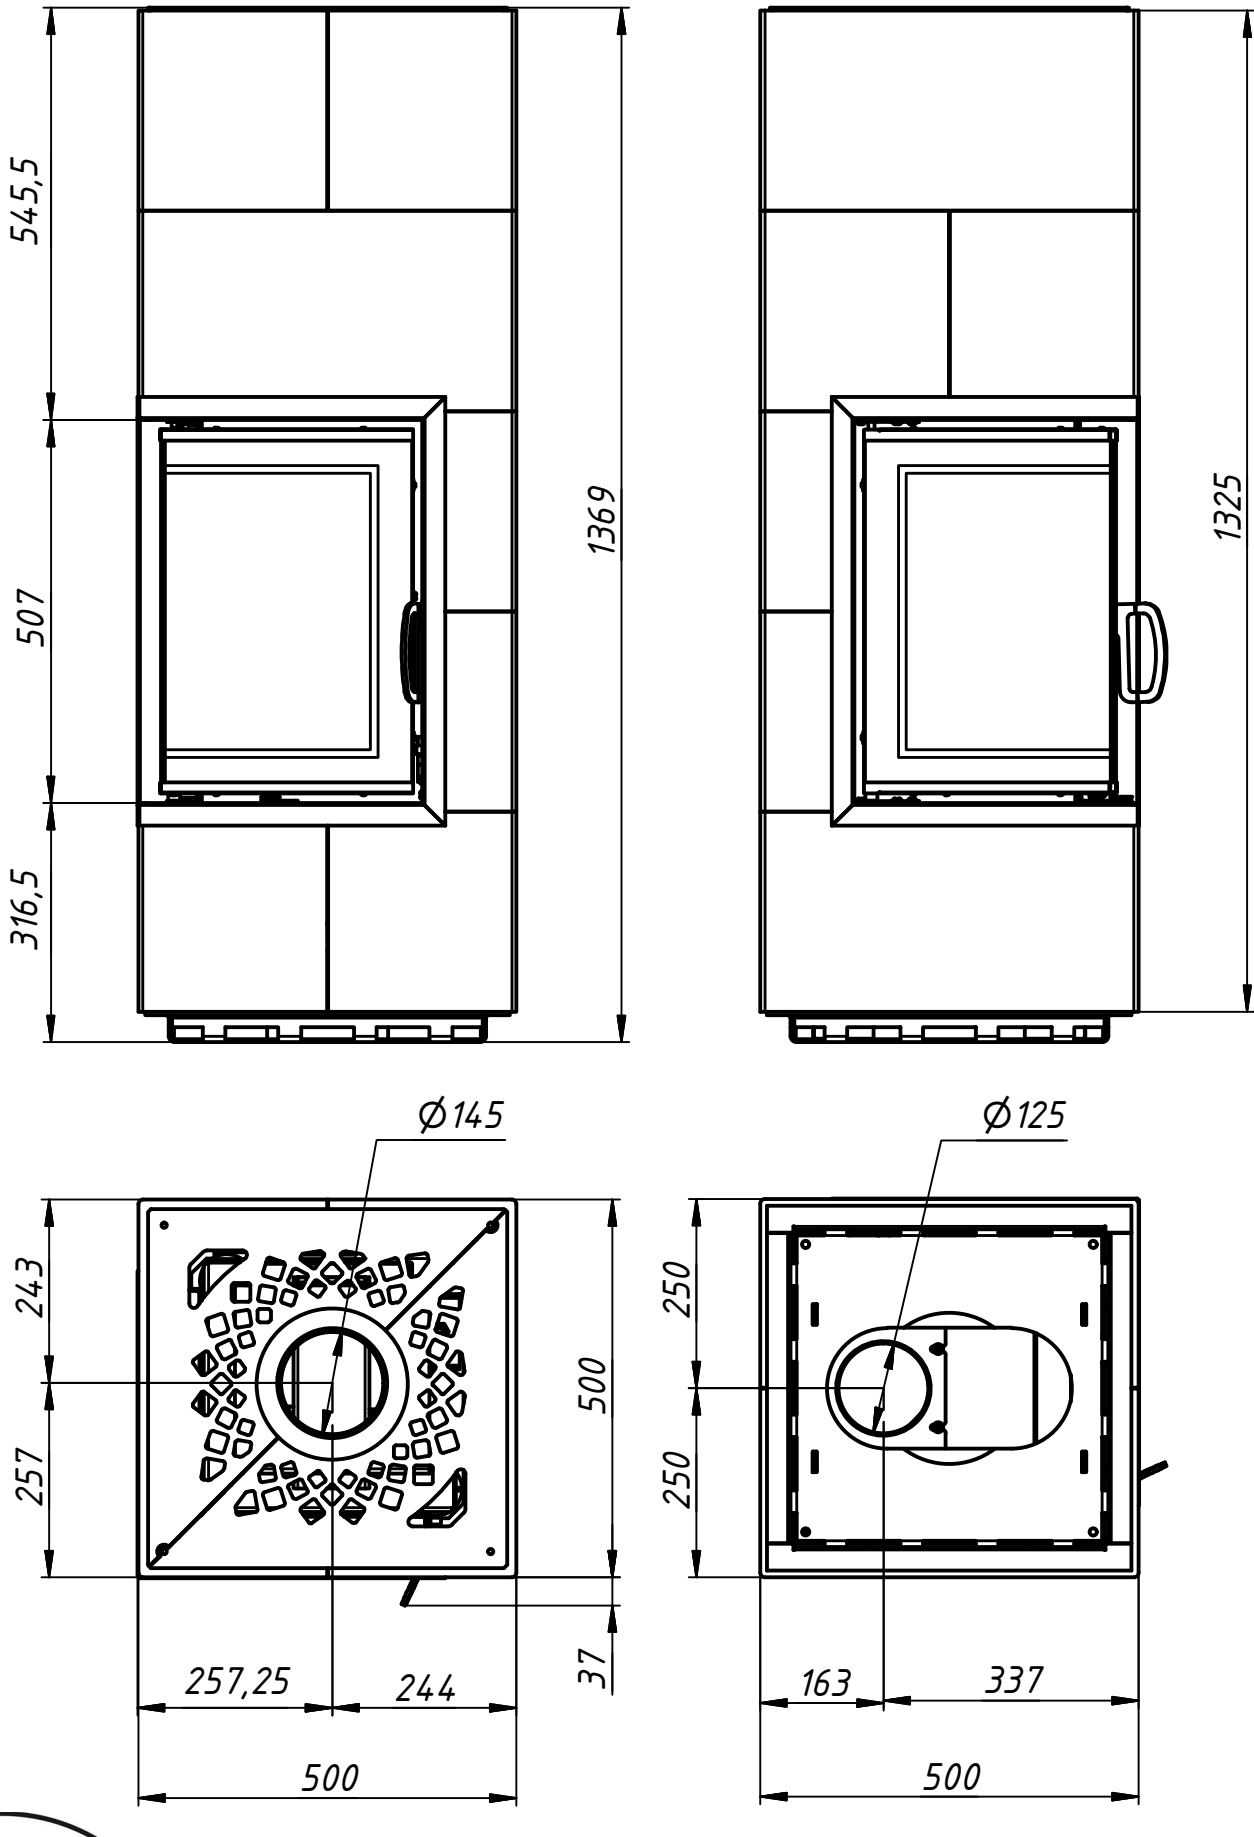

Изм.	Лист	№ докум.	Подп.	Дата

36x36x52 facing kit	Лист