

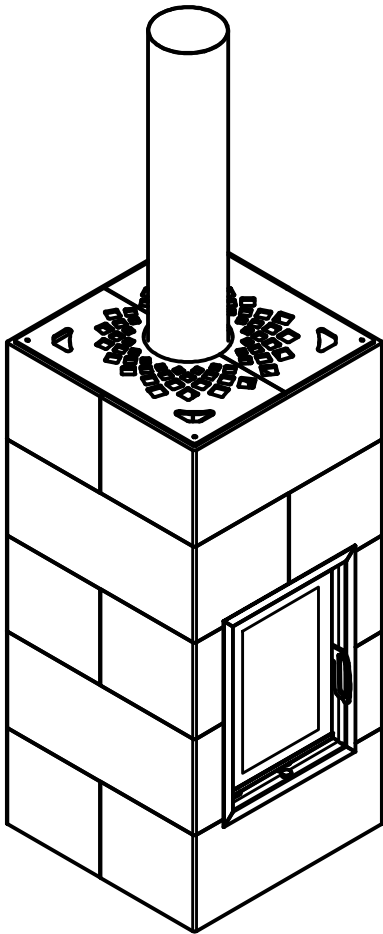
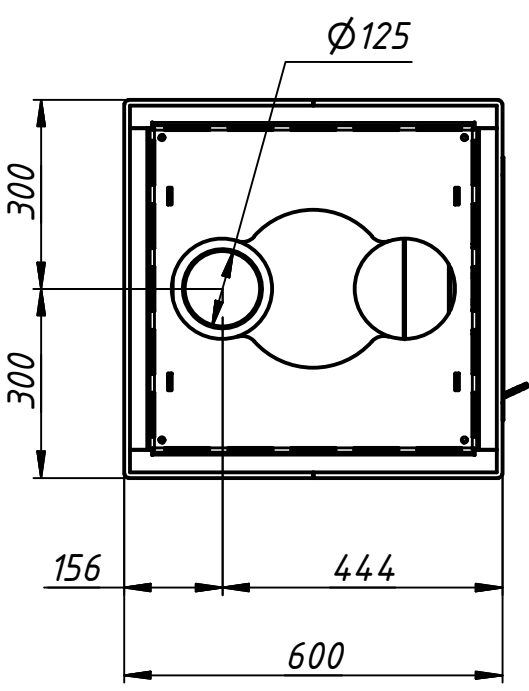
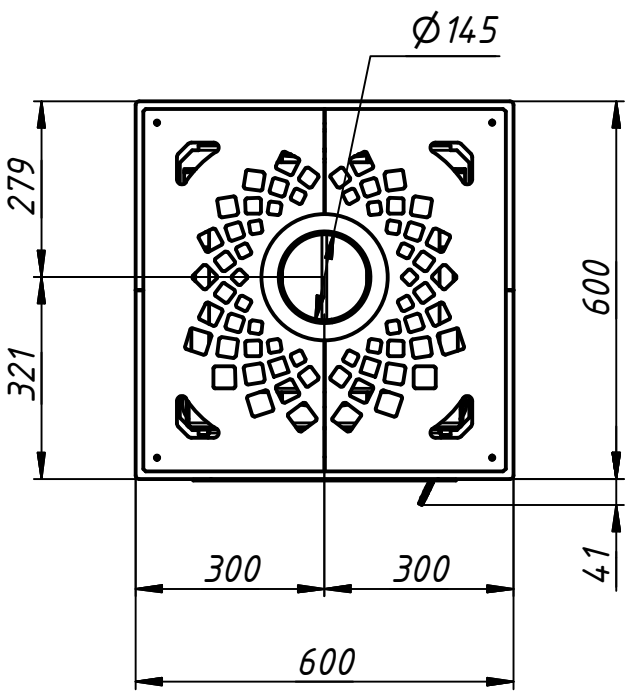


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	7
Wood consumption	kg/h	2.1
Efficiency	%	80
Heat distribution		
door glass (single / double)	%	25 / 15
fireplace insert	%	75 / 85
water circuit	%	--/ --
Required chimney pressure	Pa	11
Chimney diameter	mm	150
Combustion air connection*	mm	100-125
Minimum distance from facing to the non-combustible surfaces	mm	50
non-combustible surfaces	cm	25
Weight of the fireplace insert with ribbed 40mm chamotte	kg	128.5
Weight of the fireplace insert facing kit	kg	403

*Minimum D100mm is allowable.

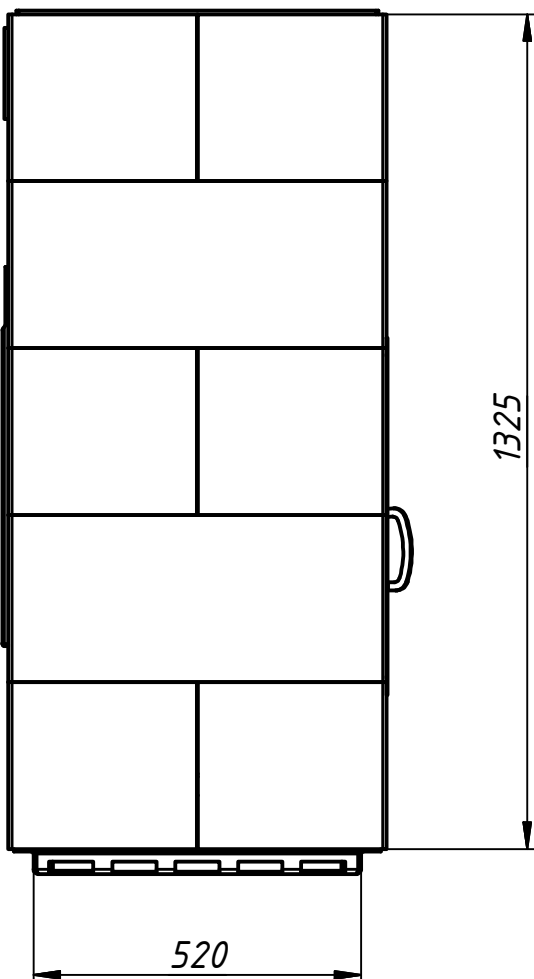

Инв. № подл.	Подп. и дата	Взам. инв. №	Инв. № дубл.	Подп. и дата

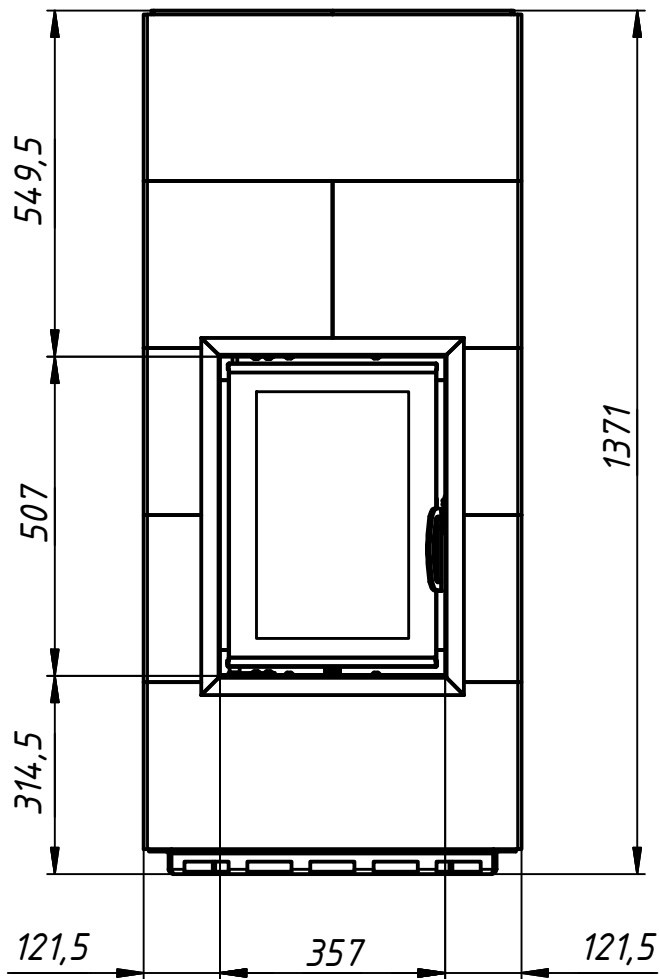

Изм.	Лист	№ докум.	Подп.	Дата

37x52 facing kit	Лист
Копировал	Формат А3