
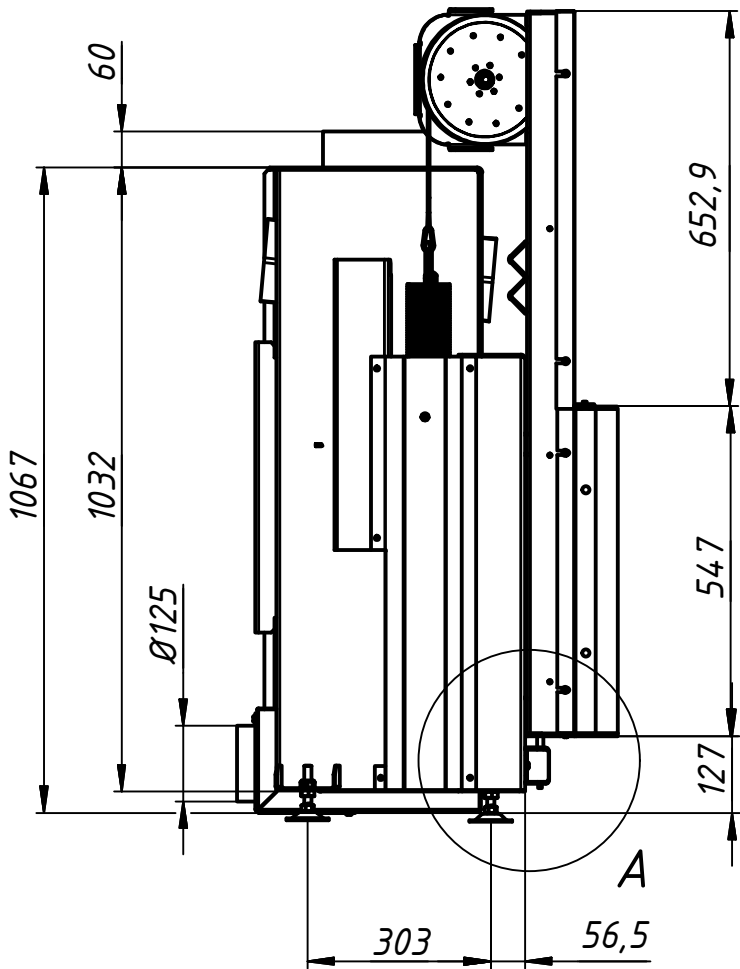




Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	11
Wood consumption	kg/h	3.3
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	30 / 20
fireplace insert	%	70 / 80
water circuit	%	--/ --
Required chimney pressure	Pa	12
Chimney diameter	mm	180
Combustion air connection	mm	125
Minimum radiant area	sq m	5.6
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1500
Minimum outgoing air grating cross-section	sq cm	1800
Log length	cm	30
Weight fireplace with ribbed 40mm chamotte	kg	283
Weight of one accumulation set	kg	20,5
Maximum number of accumulation sets		2
Increase in size with acumulation set from the side / behind	mm	-- / 82

B

B

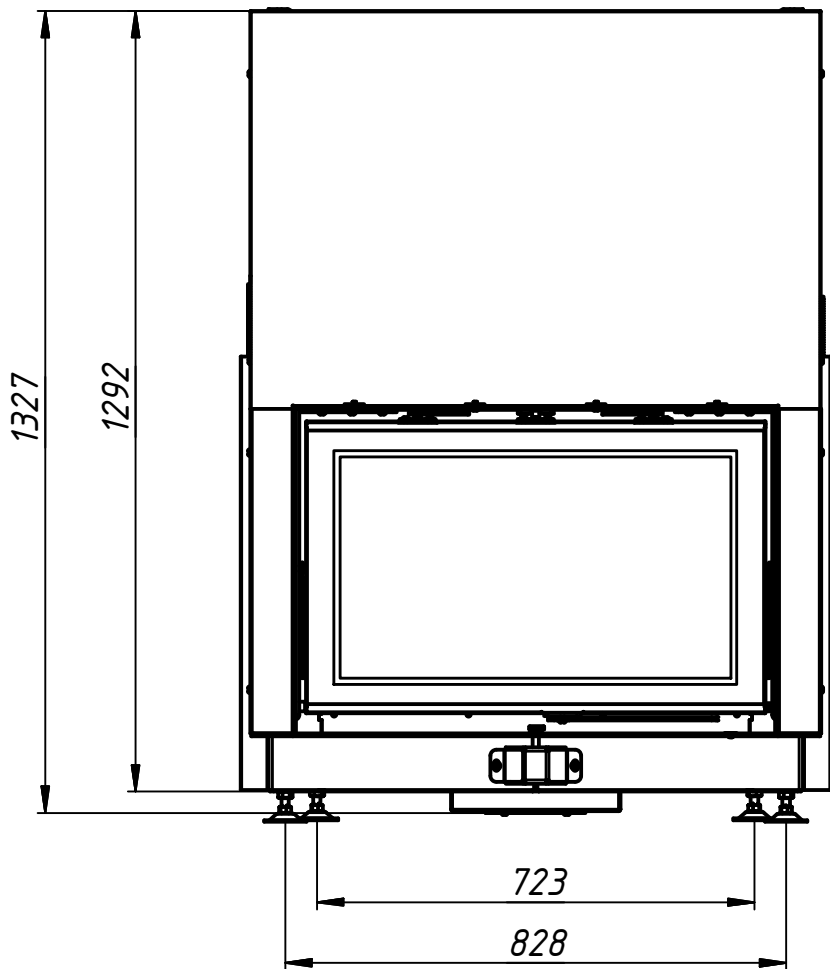

A (1:5)

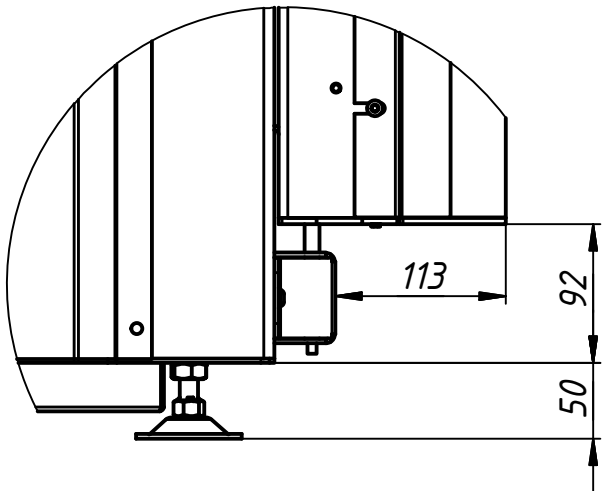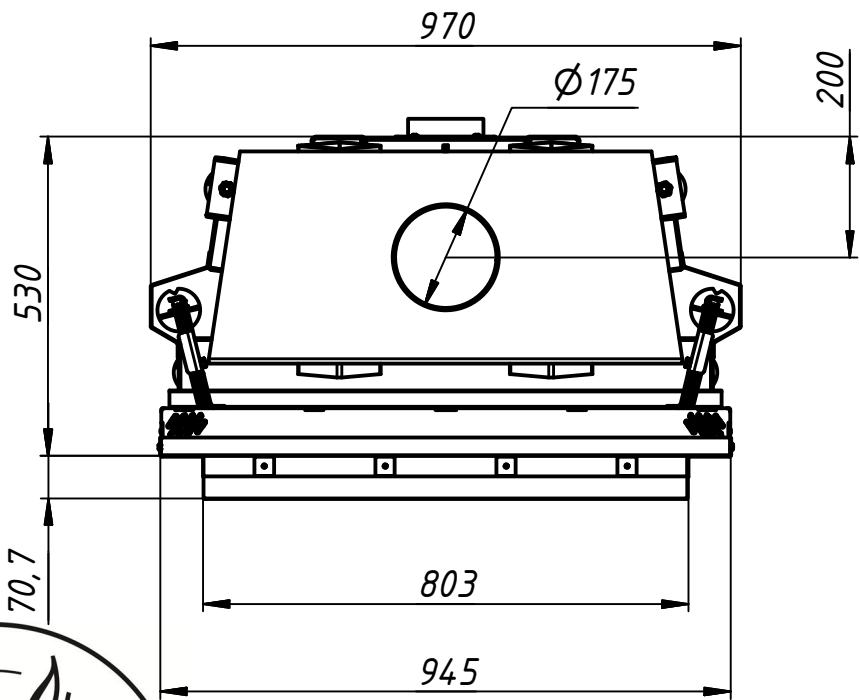

Инв. № подл.	Подп. и дата	Взам. инв. №	Инв. № дудл.	Подп. и дата

Изм.	Лист	№ докум.	Подп.	Дата

80x52 H