
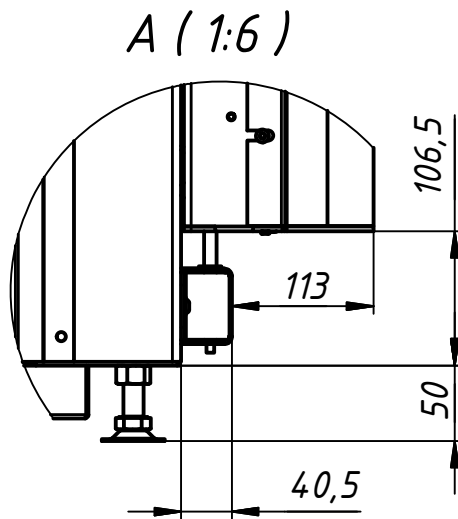
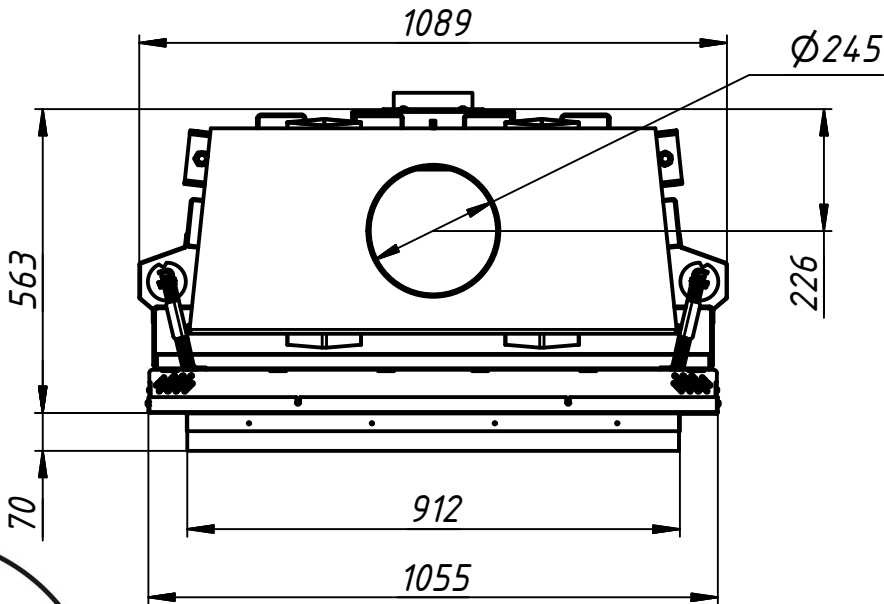
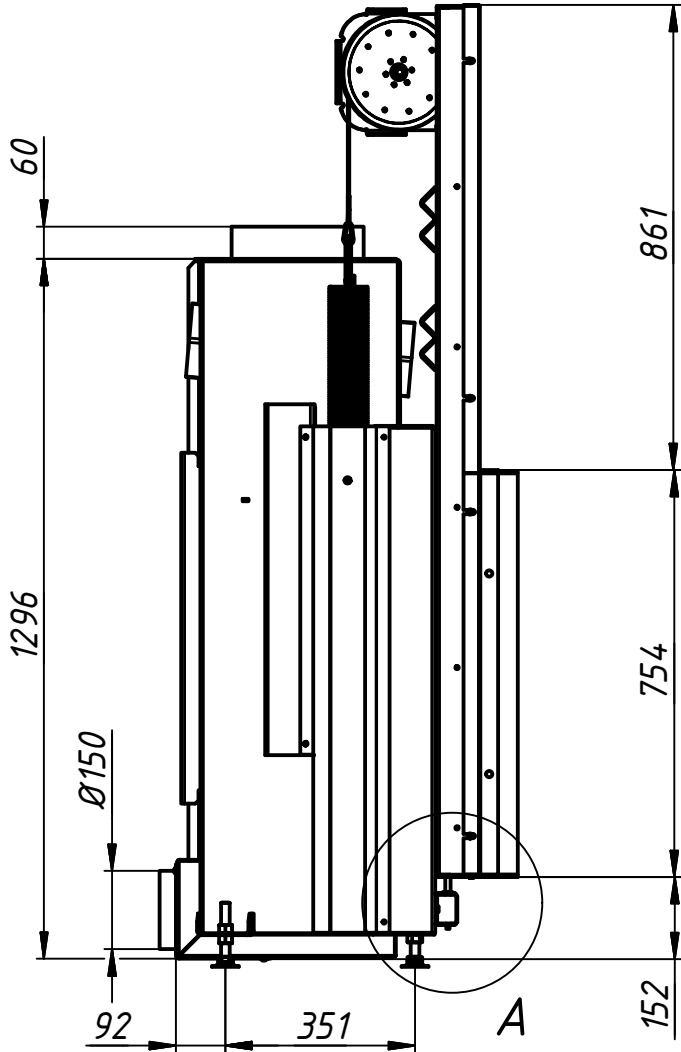


Technical information	Unit	Value
Tested according to	-	-
Nominal heat power	kW	16
Wood consumption	kg/h	4.8
Efficiency	%	>80
Heat distribution		
door glass (single / double)	%	40 / 30
fireplace insert	%	60 / 70
water circuit	%	-- / --
Required chimney pressure	Pa	12
Chimney diameter	mm	250
Combustion air connection	mm	150
Minimum radiant area	sq m	6.8
Minimum distance from the insulated areas	mm	60
Minimum supply air grating cross-section	sq cm	1900
Minimum outgoing air grating cross-section	sq cm	2300
Log length	cm	33-40
Weight fireplace with ribbed 40mm chamotte	kg	392
Weight of one accumulation set	kg	20.5
Maximum number of accumulation sets		2
Increase in size with acumulation set from the side / behind	mm	-- / 82

B

A

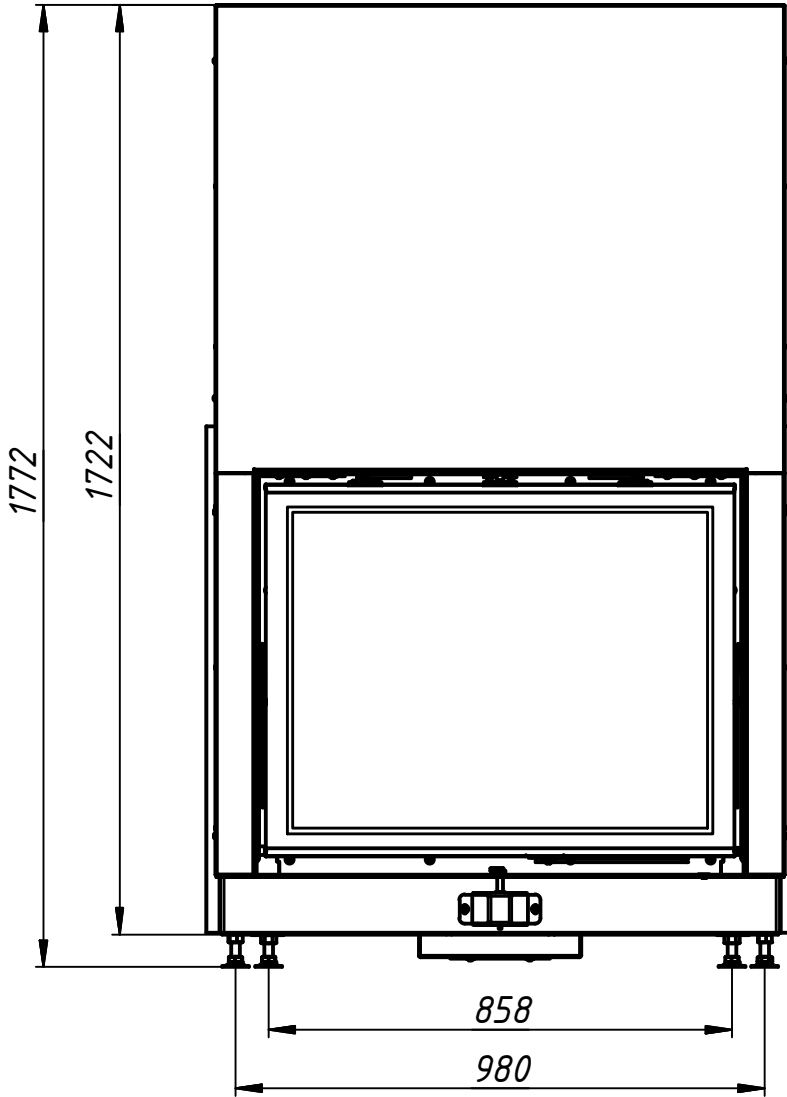

Изм.	Лист	№ докум.	Подп.	Дата

90x75 H

Лист